

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [CROSSIO](#) /

› [CROSSIO Modern Crystal Ceiling Fan with Lights 52" Black Chandelier User Manual \(Model GLI-1160-01\)](#)

CROSSIO GLI-1160-01

CROSSIO Modern Crystal Ceiling Fan with Lights 52" Black Chandelier User Manual

Model: GLI-1160-01

IMPORTANT SAFETY INSTRUCTIONS

Please read and understand all instructions before beginning installation. Failure to follow these instructions may result in electric shock, fire, or personal injury.

- **Electrical Safety:** All electrical connections must be in accordance with local codes, ordinances, or national electrical codes. If you are unfamiliar with wiring, consult a qualified electrician.
- **Power Disconnection:** Before installation or maintenance, ensure the power is turned off at the circuit breaker or fuse box to prevent electric shock.
- **Mounting:** The ceiling fan must be mounted to a structurally sound ceiling joist or outlet box capable of supporting the fan's weight (approximately 27.5 lbs).
- **Blade Clearance:** Ensure there is adequate clearance from the fan blades to any walls or obstructions.
- **Crystal Handling:** Handle crystal components with care to avoid breakage.
- **Indoor Use Only:** This product is designed for indoor use only. Do not expose to water or excessive humidity.

PACKAGE CONTENTS

Verify that all components listed below are present and undamaged before proceeding with installation. If any parts are missing or damaged, contact customer support.

- Ceiling Fan Motor Housing
- Fan Blades (5)
- Crystal Lampshade Assembly
- Downrods (5-inch and 10-inch)
- Canopy and Mounting Bracket
- Remote Control
- Hardware Pack (screws, washers, wire nuts)

- Instruction Manual



Image: Overview of CROSSIO Ceiling Fan components and dimensions.

SPECIFICATIONS

Brand	CROSSIO
Model Name	GLI-1160-01
Product Dimensions	52" L x 52" W x 20.8" H (with 5" rod) / 25.7" H (with 10" rod)
Material	Crystal, Iron, Plywood fan blades
Color	Black
Light Source	Integrated LED panel (22W)
Brightness	425 to 6120 lumens (Dimmable)
Color Temperature	3000K (Warm White), 4000K (Daylight), 6500K (Cool White)

Control Method	Remote Control, APP Control
Fan Speeds	6 adjustable wind speeds
Timer Function	2-hour automatic shut-off
Reversible Function	Yes (Downdraft for summer, Updraft for winter)
Voltage	120 Volts
Item Weight	27.5 Pounds

SETUP AND INSTALLATION

Professional installation is recommended for safety and optimal performance. Ensure power is disconnected before starting.

Pre-Installation Checklist

- Turn off power at the circuit breaker.
- Ensure the mounting location can support the fan's weight.
- Gather necessary tools: screwdriver, wire strippers, electrical tape, ladder.

Assembly Steps

1. **Mounting Bracket Installation:** Secure the mounting bracket to the ceiling outlet box or joist using appropriate screws.
2. **Downrod Assembly:** Attach the chosen downrod (5-inch or 10-inch) to the fan motor housing. Feed the electrical wires through the downrod.
3. **Hanging the Fan:** Carefully lift the fan assembly and hang it from the mounting bracket using the provided hook or ball joint.
4. **Electrical Wiring:** Connect the fan's electrical wires to the household wiring according to the wiring diagram in the full manual. Ensure all connections are secure with wire nuts and electrical tape.
5. **Canopy Installation:** Slide the canopy up to the ceiling and secure it to the mounting bracket, covering the wiring connections.
6. **Blade Attachment:** Attach each fan blade to the motor housing using the provided screws. Ensure they are securely fastened.
7. **Crystal Lampshade Installation:** Carefully attach the crystal lampshade assembly to the bottom of the fan motor housing. Follow specific instructions for securing the crystals.

OPERATING INSTRUCTIONS

Your CROSSIO ceiling fan can be controlled via the included remote control or a compatible smartphone application.

Remote Control Functions

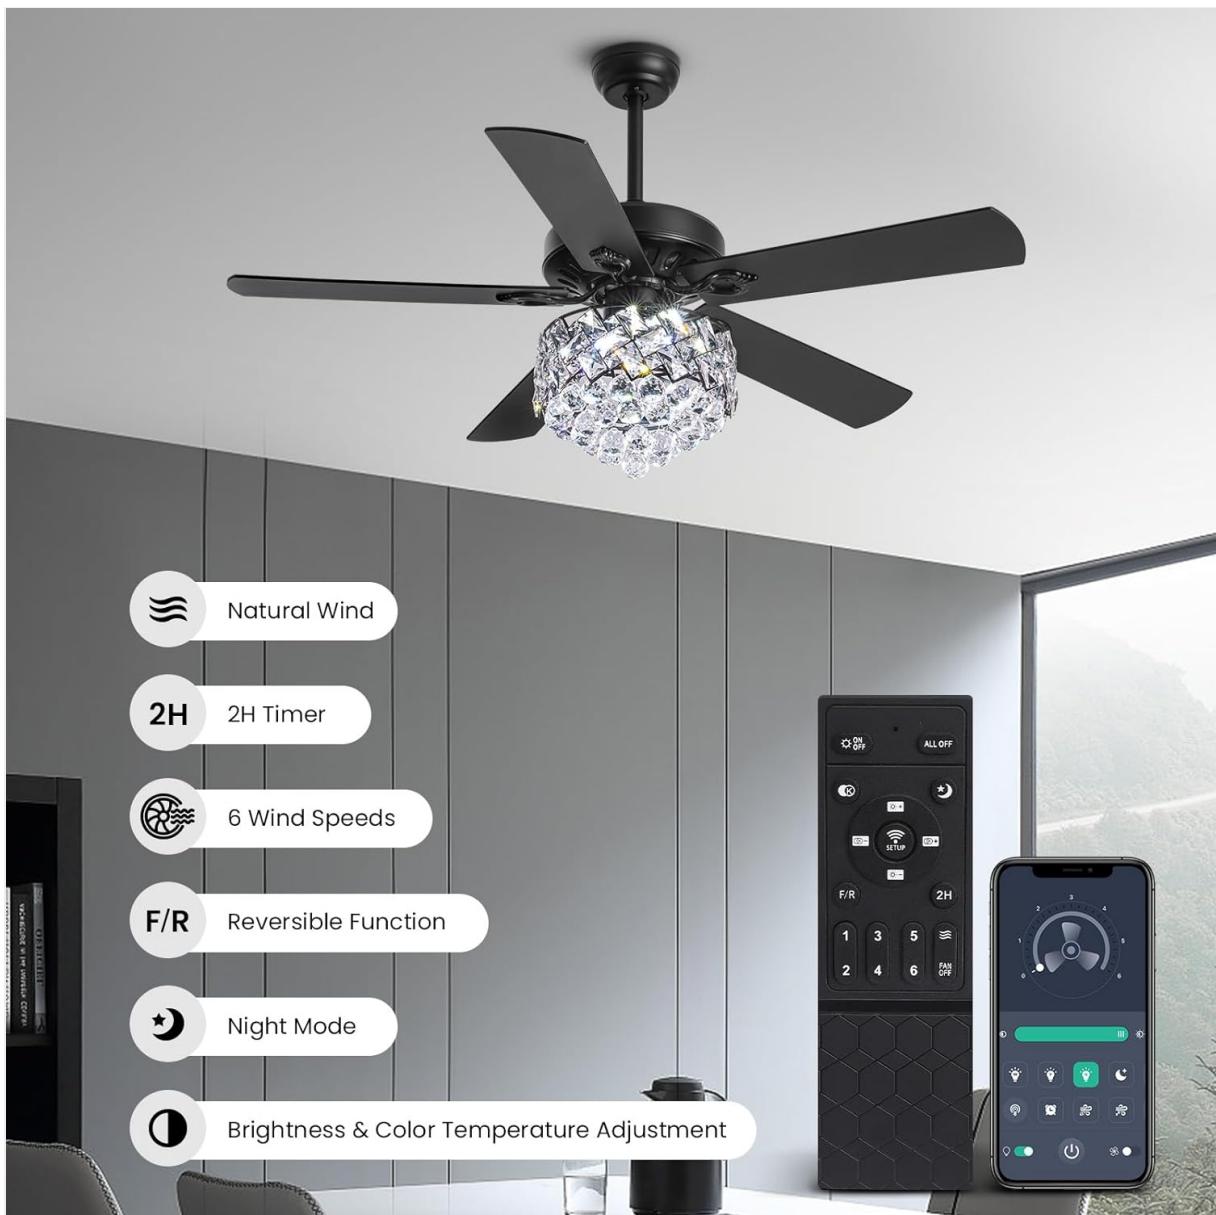


Image: Remote control and app interface highlighting key features.

- **Power On/Off:** Turns the fan and light on or off.
- **Fan Speed (1-6):** Adjusts the fan speed from a gentle breeze (1) to maximum airflow (6).
- **Light On/Off:** Toggles the LED light.
- **Brightness Adjustment:** Dims or brightens the LED light (20%-100% smooth dimmable).
- **Color Temperature Adjustment:** Cycles through Warm White (3000K), Daylight (4000K), and Cool White (6500K).
- **Reversible Function (F/R):** Changes the direction of fan blade rotation.
- **Timer (2H):** Sets the fan to turn off automatically after 2 hours.
- **Natural Wind Mode:** Simulates natural breezes by varying fan speed.
- **Night Mode:** Activates a low light setting suitable for nighttime.

App Control

Download the compatible smartphone application (refer to the full manual for app name and QR code) to control the fan and light functions from your mobile device. Follow the in-app instructions for pairing.

Reversible Function

The reversible function allows for year-round use:

- **Downdraft Mode (Summer):** Blades rotate counter-clockwise, creating a downward airflow that produces a cooling breeze.
- **Updraft Mode (Winter):** Blades rotate clockwise, drawing air up towards the ceiling to help distribute warm air evenly throughout the room.

REVERSIBLE FUNCTION

Suitable for all year round

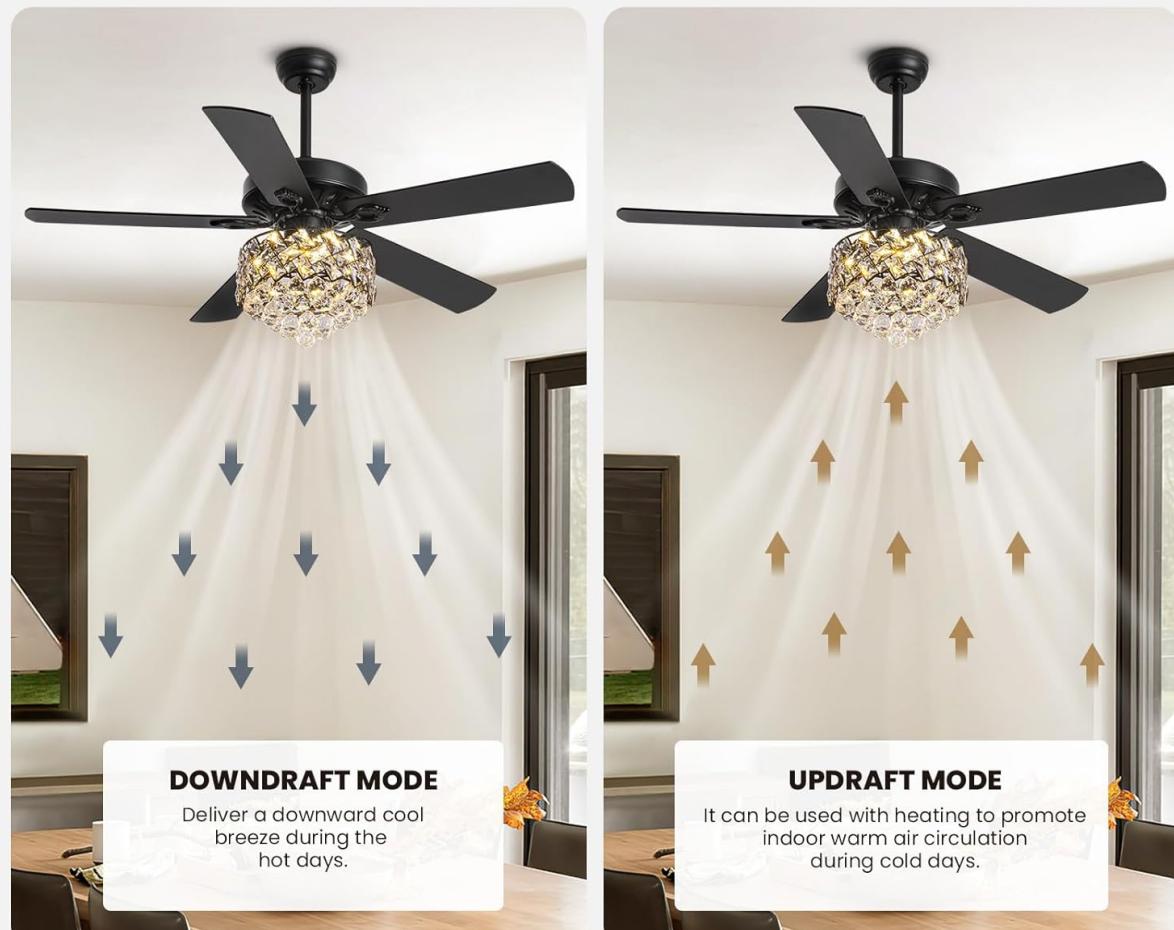


Image: Explanation of Downdraft and Updraft modes.

Light Control

The integrated LED panel offers versatile lighting options:

- **Dimmable:** Adjust the light brightness from 20% to 100% to suit your preference.
- **Color Temperature:** Choose between Warm White (3000K) for a cozy ambiance, Daylight (4000K) for natural illumination, or Cool White (6500K) for bright, task-oriented lighting.



20%-100% SMOOTH DIMMABLE



Integrate
22W LED

COLOR TEMPERATURE ADJUSTMENT



3000K (warm light)



4000K (natural light)



6500K (cool light)

Image: Dimmable LED and Color Temperature Adjustment.

Fan Speed Control

Select from 6 distinct wind speeds to customize your comfort level:

- **Speeds 1-2:** Gentle, comfortable breeze, ideal for sleeping or light air circulation.
- **Speeds 3-4:** Moderate ventilation and cooling.
- **Speeds 5-6:** Strong airflow for rapid heat dissipation.

PRODUCT SPECIFICATION





2 Downrods	Control Types	Room Size 225-400 sq ft.
		
Style Modern	Wet Rating Dry Indoor	Finish Black

Image: 6 Wind Speed Options.

MAINTENANCE AND CLEANING

Regular maintenance ensures the longevity and optimal performance of your ceiling fan.

- **Power Off:** Always turn off the power at the circuit breaker before cleaning.
- **General Cleaning:** Use a soft, damp cloth to wipe down the motor housing and blades. Do not use abrasive cleaners or solvents.
- **Crystal Cleaning:** Gently wipe the crystal components with a soft, lint-free cloth. A mild glass cleaner can be used sparingly if needed, applied to the cloth, not directly to the crystals.
- **Blade Inspection:** Periodically check fan blade screws for tightness. Loose blades can cause wobbling and noise.
- **No Lubrication:** The motor is permanently lubricated and does not require additional oiling.

TROUBLESHOOTING

If you encounter issues with your fan, refer to the table below for common problems and solutions.

Problem	Possible Cause	Solution
Fan does not start	No power to the fan; Loose wire connections; Remote control battery low.	Check circuit breaker/fuse; Verify all wire connections are secure; Replace remote control batteries.
Light does not work	Loose wire connection to light kit; LED panel malfunction.	Check light kit wiring; If LED panel is faulty, contact customer support for replacement.
Fan wobbles	Loose fan blades; Improperly balanced blades; Loose mounting bracket.	Ensure all blade screws are tight; Use a balancing kit (not included) if necessary; Verify mounting bracket is securely fastened.
Excessive noise	Loose screws; Crystals rattling; Motor hum.	Check all screws on fan blades and housing; Ensure crystals are properly secured and not touching each other excessively; A slight motor hum is normal, but excessive noise may indicate an issue.
Remote control not working	Low battery; Remote not paired.	Replace batteries; Refer to the full manual for remote pairing instructions.



WARRANTY AND SUPPORT

CROSSIO is committed to product quality and customer satisfaction.

- 1-Year Warranty:** This product is covered by a 1-year limited warranty against manufacturing defects. Contact us for free replacement if any quality issues arise within this period.
- Customer Support:** Our dedicated 24/7 customer support team is available to provide genuine assistance and technical advice. If you have any questions or require assistance, please contact us through your purchase platform or the official CROSSIO website.

Related Documents - GLI-1160-01

 <p>Manual Book Ceiling Fan with Lights Model No. GLI-1160-01</p>	<p>CROSSIO CFL-1163-01 Ceiling Fan with Lights Installation Manual</p> <p>This manual provides detailed instructions for the installation, operation, and maintenance of the CROSSIO CFL-1163-01 Ceiling Fan with Lights. It includes safety precautions, a packing list, installation steps, remote control functions, app control instructions, and troubleshooting tips.</p>
---	---

<p>Manual Book Ceiling Fan with Lights Model No.: CFL-1162-01</p>   	<p><u>CFL-1162-01 Ceiling Fan with Lights User Manual</u></p> <p>This manual provides detailed instructions for the installation, operation, and maintenance of the CFL-1162-01 Ceiling Fan with Lights. It includes safety rules, parts list, installation steps, remote control functions, app control instructions, and troubleshooting tips.</p>
<p>Manual Book Ceiling Fan with Light Model No.: CFL-1061-01</p>   	<p><u>CROSSIO CFL-1061-01 Ceiling Fan with Light Installation Manual</u></p> <p>Official installation manual for the CROSSIO CFL-1061-01 Ceiling Fan with Light. Includes safety rules, packing list, assembly instructions, remote control guide, app control setup, and troubleshooting.</p>
<p>Manual Book Ceiling Light Model No.: CXC001BL-0A</p>  	<p><u>CROSSIO CXC001BL-2A Ceiling Light Installation Manual</u></p> <p>Installation manual and safety guide for the CROSSIO CXC001BL-2A Ceiling Light. Includes packing list, installation steps, troubleshooting, and care instructions.</p>
<p>Manual Book Ceiling Fan with Lights Model No.: JX001-01</p>   	<p><u>NOXARTE JX001-01 Ceiling Fan with Lights: User Manual, Installation, and Smart Control Guide</u></p> <p>Comprehensive guide for the NOXARTE JX001-01 Ceiling Fan with Lights. Includes installation steps, safety rules, remote control operation, Tuya app setup, Alexa voice control, Google Home integration, and troubleshooting.</p>
<p>Urmet Mod. 1160 IP 3000</p> <p>SPRECHANLAGE MIT FERNRECHENSYSTEM miro IP Sch./Re.11150/0</p>  	<p><u>Urmet miro IP Intercom System 1160/3 Installation Guide</u></p> <p>Detailed installation guide for the Urmet miro IP intercom system, model 1160/3, covering device description, wiring, installation procedures, technical specifications, and integration with Yokis devices.</p>