

[Manuals.plus](#) /

› [DINGLILIGHTING](#) /

› DLLT 3-Light Matte Black Bathroom Vanity Light Fixture Instruction Manual (Model: B0CL6LV9SB)

DINGLILIGHTING B0CL6LV9SB

DLLT 3-Light Matte Black Bathroom Vanity Light Fixture Instruction Manual

Model: Matte Black 3-Light (B0CL6LV9SB)

Brand: DINGLILIGHTING

INTRODUCTION

Thank you for choosing the DLLT 3-Light Matte Black Bathroom Vanity Light Fixture. This manual provides essential information for the safe installation, operation, and maintenance of your new lighting fixture. Please read these instructions thoroughly before beginning installation and retain them for future reference.

SAFETY INFORMATION

- **WARNING:** To avoid electric shock, ensure power is turned off at the circuit breaker or fuse box before installation.
- All electrical connections must be in accordance with local codes, ordinances, or the National Electric Code (NEC). Consult a qualified electrician if you are unfamiliar with electrical wiring.
- Use only UL-certified bulbs with the specified wattage (Max 60W per bulb).
- Do not exceed the maximum wattage for the fixture.
- Handle glass components with care to prevent breakage.
- This fixture is designed for indoor use only and is not water resistant.

WHAT'S IN THE BOX

Verify that all components are present before beginning installation:

- Light Fixture Body (Matte Black)
- Clear Glass Shades (3 pieces)
- E26 Bulbs (3 pieces, 2700K Warm White)
- Mounting Hardware (Mounting bracket, screws, wire nuts)
- Instruction Manual

SETUP AND INSTALLATION

Follow these steps for proper installation. It is recommended to have a second person assist during installation.

Tools Required (Not Included):

- Screwdriver (Phillips and Flathead)
- Wire Strippers
- Electrical Tape
- Safety Glasses
- Ladder (if necessary)

Installation Steps:

1. **Turn Off Power:** Locate the circuit breaker for the light fixture and turn off the power. Verify power is off using a voltage tester.
2. **Prepare Mounting:** Remove the old fixture (if applicable). Attach the mounting bracket to the junction box using the provided screws. Ensure the bracket is securely fastened.
3. **Wiring Connections:**
 - Connect the **green or bare copper ground wire** from the fixture to the **ground wire** from the junction box using a wire nut.
 - Connect the **white (neutral) wire** from the fixture to the **white (neutral) wire** from the junction box using a wire nut.
 - Connect the **black (live) wire** from the fixture to the **black (live) wire** from the junction box using a wire nut.
 - Secure all wire connections with electrical tape.
4. **Mount Fixture Body:** Carefully align the fixture body with the mounting bracket and secure it with the provided screws.
5. **Install Glass Shades:** Gently attach each clear glass shade to the fixture. The shades can be installed facing either upwards or downwards, depending on your preference.
6. **Insert Bulbs:** Screw the provided E26 bulbs into the sockets. Do not overtighten.
7. **Restore Power:** Turn the power back on at the circuit breaker.

Upgraded Anti-rust

Matte Black Finish



Updated Finish -Anti-rust



Old Finish - Easily got rust



Figure 1: Product dimensions and compatible E26 bulb types.

OPERATING INSTRUCTIONS

Once installed, your DLLT vanity light fixture is ready for use.

- **Power On/Off:** Use your standard wall switch to turn the light fixture on or off.
- **Dimmable Feature:** This fixture is dimmable when used with compatible dimmable E26 bulbs and a dimmer switch (not included). Ensure both the bulbs and switch are rated for dimming functionality.
- **Bulb Type:** The fixture uses E26 base bulbs, with a maximum wattage of 60 watts per bulb. The included bulbs are 2700K warm white.

Size Display

16.93in/430mm

4.72in/120mm

10.83in/275mm

5.91in/150mm

18.51in/470mm

4.1in/104mm

5.63in/143mm

Bulbs Included

3 E26 Bulbs Included

Max Wattage: 60W

Voltage: 110-120V

Compatible with All E26 Bulbs

MAINTENANCE

- **Cleaning:** Turn off power before cleaning. Wipe the matte black finish with a soft, dry cloth. For glass shades, remove them carefully and wash with mild soap and water, then dry thoroughly before reattaching. Avoid abrasive cleaners.
- **Bulb Replacement:** Ensure power is off. Allow bulbs to cool completely before replacing. Unscrew old bulbs and screw in new E26 bulbs (Max 60W).
- **Anti-Rust Feature:** The matte black finish is designed to be anti-rust, making it easy to clean and maintain its appearance over time.



Figure 3: The fixture features a durable matte black finish and thick glass for easy maintenance.

TROUBLESHOOTING

If you encounter issues with your light fixture, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	No power, loose wiring, faulty bulb.	Check circuit breaker. Ensure all wire connections are secure. Replace bulb.
Light flickers.	Loose bulb, incompatible dimmer switch/bulb.	Tighten bulb. Ensure dimmer switch and bulbs are compatible and rated for dimming.
Glass shade is broken.	Accidental damage.	Contact customer support for replacement parts.

Figure 4: In case of a broken glass shade, contact customer support for assistance.

SPECIFICATIONS

- **Brand:** DINGLILIGHTING
- **Model:** Matte Black 3-Light (B0CL6LV9SB)
- **Color:** Matte Black
- **Material:** Glass, Metal
- **Style:** Modern, Contemporary
- **Product Dimensions:** 16.54"L x 10.63"W x 6.69"H
- **Light Fixture Form:** Vanity
- **Indoor/Outdoor Usage:** Indoor
- **Power Source:** Corded Electric
- **Installation Type:** Semi Flush Mount
- **Light Source Type:** LED (compatible with other E26 bulbs)
- **Finish Type:** Matte Black
- **Shade Material:** Clear Glass
- **Number of Light Sources:** 3
- **Voltage:** 120 Volts
- **Light Color (Included Bulbs):** Warm White (2700K)
- **Wattage (Max per bulb):** 60 watts
- **Bulb Base:** E26
- **Control Method:** Wall Switch
- **Special Features:** 100% Metal Lamp Body, 5 Years Warranty, Anti-Rust, Energy Efficient
- **Item Weight:** 4.14 pounds

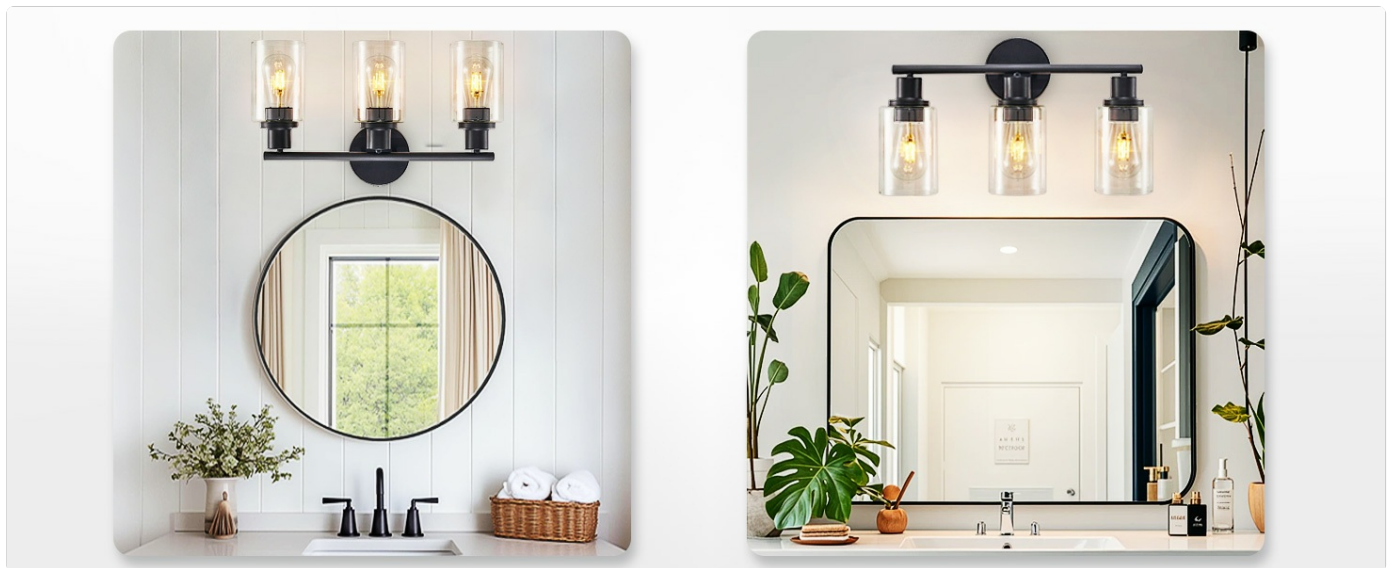


Figure 5: High-quality components ensure durability and safety.

WARRANTY AND SUPPORT

5 Years Warranty: DINGLILIGHTING proudly stands behind the quality of this bathroom vanity light fixture with a full 60-month warranty. If your lighting fixture encounters any defects or stops working within 5 years of purchase, we are here to assist you with troubleshooting or provide a replacement.

Customer Support: If you experience any issues with your wall light fixture or require assistance, please contact us through the Amazon message box. We are committed to responding within 24 hours to ensure your satisfaction.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question