

[Manuals.plus](#) /

› [Lenovo](#) /

› [Lenovo ThinkCentre Tiny-in-One 22 Gen 5 Monitor User Manual](#)

Lenovo ThinkCentre TIO 22 Gen 5

Lenovo ThinkCentre Tiny-in-One 22 Gen 5 Monitor User Manual

Model: ThinkCentre TIO 22 Gen 5

1. PRODUCT OVERVIEW

The Lenovo ThinkCentre Tiny-in-One 22 Gen 5 is a 21.5-inch Full HD (1920x1080) IPS WLED LCD monitor designed for professional environments. It features a 10-point capacitive touchscreen, an integrated webcam, and an anti-glare display. This monitor is part of the Tiny-in-One series, allowing for seamless integration with compatible Lenovo Tiny PCs.

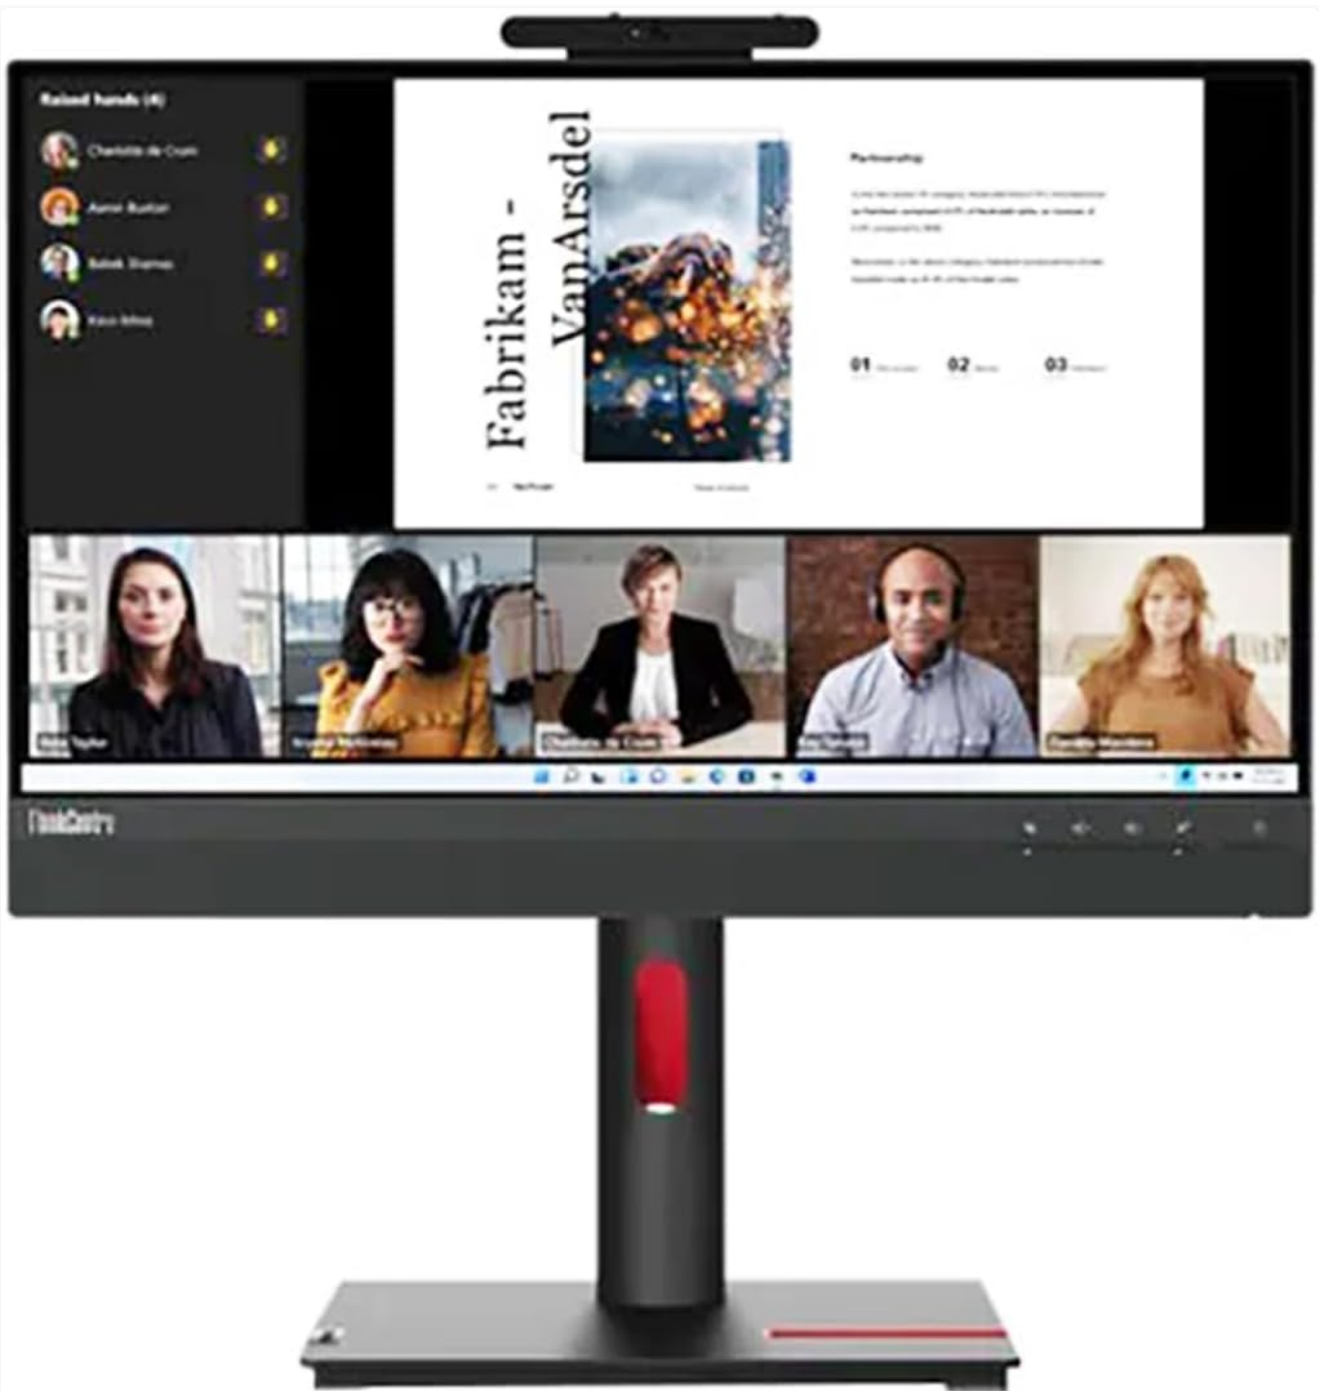


Figure 1: Front view of the Lenovo ThinkCentre Tiny-in-One 22 Gen 5 monitor, showcasing its display and integrated webcam.

Key Features:

- 21.5-inch Full HD (1920x1080) IPS display with anti-glare coating.
- 10-point capacitive touchscreen for interactive use.
- Integrated webcam for video conferencing.
- Fast 4 ms response time (Extreme mode).
- High contrast ratio of 1000:1 and 99% sRGB color gamut.
- Designed for integration with Lenovo Tiny PCs.

2. PACKAGE CONTENTS

Verify that all items are present in the package:

- Lenovo ThinkCentre Tiny-In-One 22 Gen 5 21.5" Monitor

- Monitor Stand
- Power Cable (1m)
- 90W Power Adapter
- User Manual (this document)

3. SETUP INSTRUCTIONS

3.1. Assembling the Stand

1. Carefully remove the monitor and stand components from the packaging.
2. Attach the monitor panel to the stand arm. Ensure it clicks securely into place.
3. Connect the stand base to the stand arm, typically using a screw or latch mechanism.
4. Place the assembled monitor on a stable, flat surface.



Figure 2: Rear view of the monitor, illustrating the stand connection point and various input/output ports.

3.2. Connecting the Monitor

1. **Power Connection:** Connect the 90W power adapter to the monitor's power input, then plug the power cable into an electrical outlet.
2. **Video Connection:** Connect a video cable (HDMI or DisplayPort) from your computer to the corresponding input port on the monitor.
3. **USB Connection (for Touchscreen & Webcam):** Connect a USB-A to USB-B cable (not explicitly listed in package contents, but implied by touchscreen/webcam functionality) from your computer to the monitor's upstream USB port. This enables touchscreen functionality and the integrated webcam.
4. **Optional: Tiny PC Integration:** If using a compatible Lenovo Tiny PC, slide it into the dedicated slot at the rear of the monitor for a compact all-in-one solution.

4. OPERATING INSTRUCTIONS

4.1. Powering On/Off

- Press the power button, usually located on the front or side bezel, to turn the monitor on or off.

4.2. Using the Touchscreen

The monitor features a 10-point capacitive touchscreen. Ensure the USB connection to your computer is established for touch functionality.

- **Tap:** Single tap to select items or open applications.
- **Drag:** Press and hold, then move your finger to drag items or scroll.
- **Pinch-to-Zoom:** Use two fingers to zoom in or out on content.
- **Stylus Compatibility:** The touchscreen is compatible with passive styluses (not included).

4.3. Integrated Webcam

The monitor includes an integrated webcam. Ensure the USB connection to your computer is established for webcam functionality.

- The webcam features a physical privacy slider. Slide it to cover the lens when not in use to ensure privacy.
- A notification light indicates when the webcam is active.
- The webcam is automatically detected by most operating systems and video conferencing applications.

4.4. On-Screen Display (OSD) Menu

Access the OSD menu using the buttons on the monitor bezel to adjust settings such as brightness, contrast, color temperature, input source, and audio volume.

5. MAINTENANCE

5.1. Cleaning the Monitor

- Always power off and unplug the monitor before cleaning.
- Use a soft, lint-free cloth lightly dampened with water or a non-abrasive screen cleaner.
- Do not spray cleaner directly onto the screen.
- Avoid using harsh chemicals, solvents, or abrasive materials.

5.2. General Care

- Keep the monitor away from direct sunlight, excessive heat, and moisture.
- Ensure proper ventilation around the monitor.
- Avoid placing heavy objects on the monitor or its cables.

6. TROUBLESHOOTING

6.1. No Power

- Check if the power cable is securely connected to the monitor and the electrical outlet.
- Verify the power adapter is functioning correctly.
- Ensure the power outlet is active.

6.2. No Image on Screen

- Confirm the video cable (HDMI/DisplayPort) is properly connected to both the monitor and the computer.
- Select the correct input source using the OSD menu.
- Ensure the computer is powered on and not in sleep mode.

6.3. Touchscreen Not Responding

- Verify the USB cable connecting the monitor to the computer is securely attached.
- Restart your computer.
- Check device manager on your computer for any touchscreen driver issues.

6.4. Webcam Not Working

- Ensure the webcam privacy slider is open.
- Verify the USB cable connecting the monitor to the computer is securely attached.
- Check privacy settings in your operating system to ensure camera access is allowed for applications.

7. SPECIFICATIONS

Feature	Detail
Screen Size	21.5 Inches
Resolution	Full HD (1920x1080)
Panel Type	IPS WLED LCD
Aspect Ratio	16:9
Touchscreen	10-point Capacitive Touch
Response Time	4 ms (Extreme mode)
Contrast Ratio	1000:1
Color Gamut	99% sRGB, 8-bit
Anti-glare	Yes

Integrated Webcam	Yes
Color	Black
Item Weight	13.2 pounds
Product Dimensions (LxWxH)	22 x 5 x 15 inches
Model Number	ThinkCentre TIO 22 Gen 5



Figure 3: Monitor dimensions for planning workspace integration.

8. WARRANTY AND SUPPORT

8.1. Limited Warranty

This Lenovo ThinkCentre Tiny-in-One 22 Gen 5 monitor comes with a **Lenovo 3 Year Limited Warranty**. For detailed terms and conditions, please refer to the warranty documentation included with your product or visit the

official Lenovo support website.

8.2. Technical Support

For technical assistance, driver downloads, or further information, please visit the official Lenovo support website or contact Lenovo customer service. Keep your product's serial number readily available when seeking support.

Note: Product specifications and warranty terms are subject to change without notice.