

UNIWEIGH 609378971129

UNIWEIGH Digital Kitchen Scale (Model 609378971129)

Instruction Manual

INTRODUCTION

Thank you for choosing the UNIWEIGH Digital Kitchen Scale. This precision instrument is designed to provide accurate measurements for various items, including food, jewelry, and other small objects. Please read this manual thoroughly before use to ensure proper operation and to maximize the lifespan of your scale.

SAFETY INFORMATION

- Do not overload the scale beyond its maximum capacity of 3000 grams (6.61 lbs).
- Avoid exposing the scale to extreme temperatures, humidity, or direct sunlight.
- Keep the scale away from strong electromagnetic fields.
- Clean the scale with a soft, damp cloth. Do not immerse it in water or use abrasive cleaners.
- Handle with care to prevent damage from drops or impacts.

PACKAGE CONTENTS

- UNIWEIGH Digital Kitchen Scale
- Two weighing trays (different sizes)
- 2 AAA batteries (included)
- Instruction Manual

PRODUCT FEATURES

- **High Precision:** Weighs from 0.5g up to 3000g (6.61 lbs) with an accuracy of 0.1g.
- **Multiple Measurement Units:** Easily switch between grams (g), ounces (oz), grains (gn), carats (ct), pennyweights (dwt), and troy ounces (ozt).
- **Tare Function:** Allows you to subtract the weight of a container for net weight measurement.

- **Counting Function (PCS):** Provides an accurate count for multiple small items.
- **Clear Back-lit LCD Screen:** Ensures easy readability in various lighting conditions.
- **Auto-Off Function:** Automatically turns off after 180 seconds of inactivity to conserve battery life.
- **Compact Design:** Portable and easy to store with dimensions of 5" x 4.2" x 0.6".
- **Durable Materials:** Constructed with a stainless steel platform and ABS plastic frame for easy cleaning and longevity.

Product Features

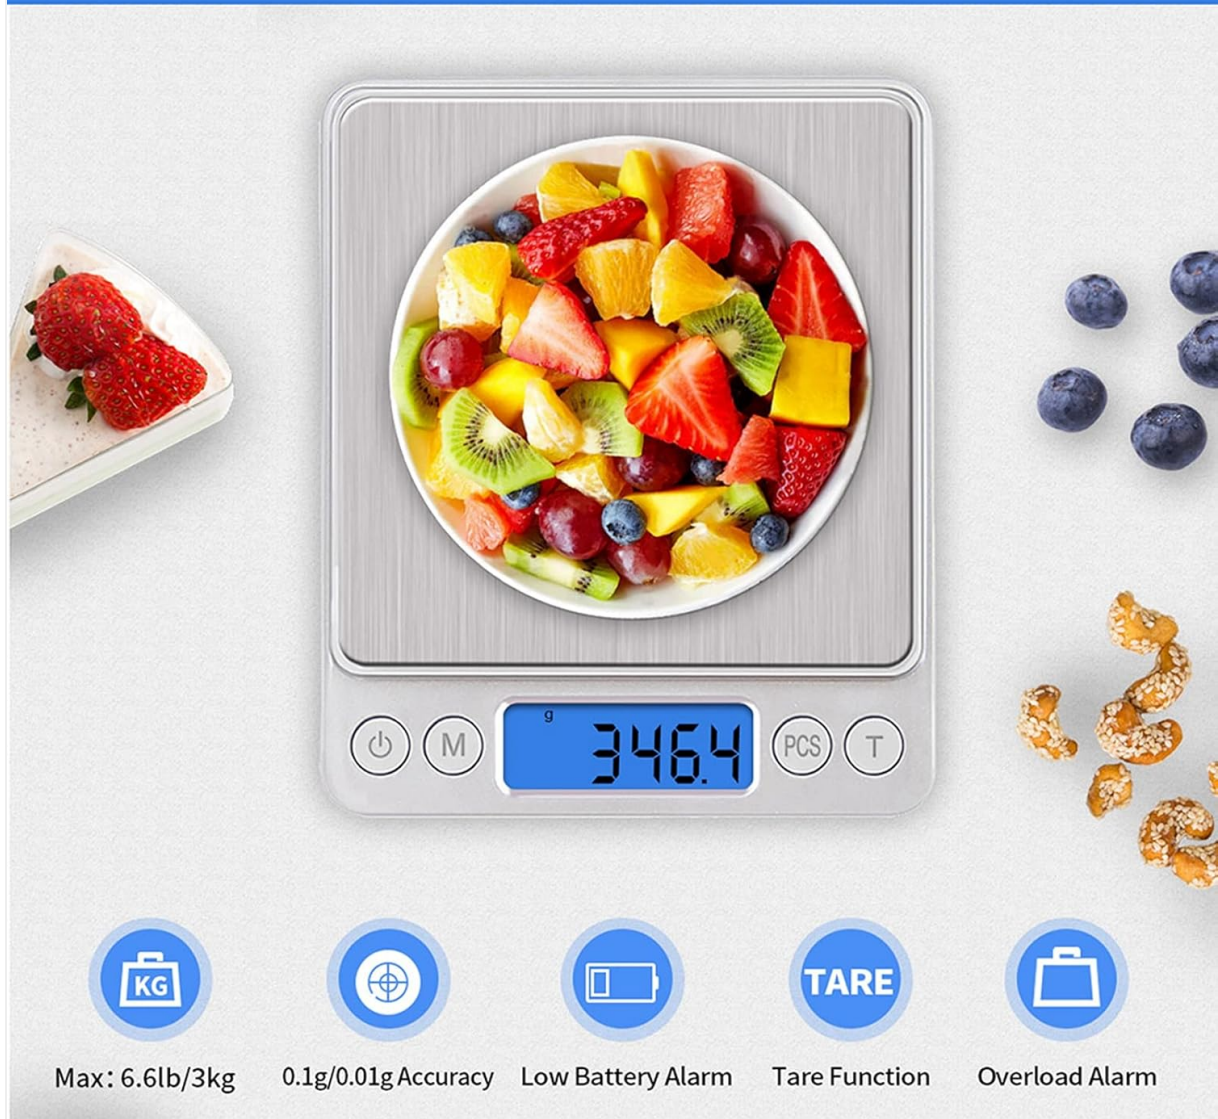


Image: Overview of the UNIWEIGH Digital Kitchen Scale highlighting its key features including 3kg max capacity, 0.1g accuracy, low battery alarm, tare function, and overload alarm.

PRODUCT DETAILS



Image: Detailed view of the scale's stainless steel weighing surface, the clear blue backlit LCD display, and the 180-second auto-off feature for energy saving.

SETUP

1. **Unpack the Scale:** Carefully remove the scale and all accessories from the packaging.
2. **Install Batteries:** Open the battery compartment on the underside of the scale. Insert the two AAA batteries, ensuring correct polarity (+/-). Close the compartment securely.
3. **Placement:** Place the scale on a flat, stable, and level surface to ensure accurate readings. Avoid placing it on soft or uneven surfaces.

OPERATING INSTRUCTIONS

1. **Power On/Off:** Press the **Power button** (🔌) to turn the scale on. The LCD display will show '88888' then '0.0' or '0.00'. Press and hold the Power button to turn the scale off.
2. **Unit Switching:** Press the **Mode button** ('M') to cycle through the available weighing units: grams (g), ounces (oz), grains (gn), carats (ct), pennyweights (dwt), and troy ounces (ozt).
3. **Weighing Items:** Place the item directly onto the center of the weighing platform. The weight will be displayed on the LCD screen.

4. **Tare Function:** To weigh items in a container, first place the empty container on the scale. Press the **Tare button** ('T'). The display will reset to '0.0'. Now, add the items to the container, and the scale will display only the net weight of the items.

5. **Counting Function (PCS):**

- With the scale on and showing '0.0', press and hold the **PCS button** until a sample size (e.g., '25', '50', '75', '100') appears.
- Place the corresponding number of sample items on the scale.
- Press the PCS button again to confirm the sample size. The scale is now calibrated for counting.
- Add the items you wish to count, and the display will show the quantity.

Your browser does not support the video tag.

Video: Demonstrates the boot display, weight measurement, unit switching, and tare function of the UNIWEIGH Digital Kitchen Scale.



TARE FUNCTION



1

PUT THE CONTAINER ON



2

PRESS "TARE" TO ZERO



3

PUT THE FOOD ON

Image: Step-by-step guide on how to use the tare function to weigh ingredients accurately in a container.

MAINTENANCE

- **Cleaning:** Wipe the scale surface with a slightly damp cloth. For stubborn stains, use a mild detergent. Ensure no liquid enters the internal components.

- **Storage:** Store the scale in a cool, dry place. If not used for an extended period, remove the batteries to prevent leakage.
- **Calibration:** The scale is factory calibrated. If you suspect inaccuracies, refer to the troubleshooting section or contact customer support for calibration instructions.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Display shows 'Lo'	Low battery power.	Replace the batteries.
Display shows 'O-Ld'	Overload.	Remove the item immediately. Do not exceed 3000g.
Inaccurate readings	Unstable surface, external interference, or needs calibration.	Place on a flat, stable surface. Avoid vibrations. Ensure no strong electromagnetic fields. If issues persist, contact customer support for calibration guidance.
Scale does not turn on	Batteries incorrectly installed or depleted.	Check battery polarity or replace batteries.

SPECIFICATIONS

- **Brand:** UNIWEIGH
- **Model Number:** 609378971129
- **Color:** Silver
- **Weight Limit:** 3000g (6.61 lbs)
- **Readout Accuracy:** 0.1g
- **Display Type:** Backlit LCD
- **Units:** g, oz, gn, ct, ozt, dwt
- **Material:** Stainless Steel (platform), Acrylonitrile Butadiene Styrene (ABS) (frame)
- **Product Dimensions:** 5 x 4.2 x 0.6 inches
- **Item Weight:** 9.2 ounces (0.26 Kilograms)
- **Power Source:** 2 AAA batteries (included)
- **Special Features:** Auto Shut Off, Backlit Display, High Weight Capacity, Lightweight, Tare Function, Counting Function

WARRANTY AND SUPPORT

UNIWEIGH products are rigorously tested and calibrated before shipment. For any questions, technical support, or warranty claims, please contact UNIWEIGH customer service through the retailer where the product was purchased. Please retain your proof of purchase for warranty validation.

