

[Manuals.plus](#) /

› [TESSAN](#) /

› TESSAN Ultra Thin Flat Plug Power Strip Surge Protector (Model TS-1026-C) Instruction Manual

TESSAN TS-1026-C

TESSAN Ultra Thin Flat Plug Power Strip Surge Protector (Model TS-1026-C) Instruction Manual

Your guide to safe and efficient power management.

PRODUCT OVERVIEW

The TESSAN Ultra Thin Flat Plug Power Strip Surge Protector (Model TS-1026-C) is designed to provide versatile power distribution and surge protection for your electronic devices. It features 8 AC outlets, 2 USB-A ports, and 1 USB-C port, all integrated into a compact design with a 15-foot flat extension cord.

15FT Flat Extension Cord

More flexible to reach the distant outlet



Image: The TESSAN power strip, showcasing its 8 AC outlets and 3 USB ports, providing 11-in-1 functionality.

SETUP AND INSTALLATION

1. Flat Plug Design



The power strip features an ultra-thin, 45-degree right-angle flat plug. This design allows the plug to sit flush against the wall, making it ideal for use in tight spaces or behind furniture without blocking other outlets.



Image: The flat plug power strip positioned behind furniture, demonstrating its space-saving design.

2. Extension Cord Placement

The 15-foot flat extension cord offers flexibility to reach distant outlets. Its 0.12-inch thin design allows it to run along walls, floors, or under carpets without creating a bulge, reducing tripping hazards.

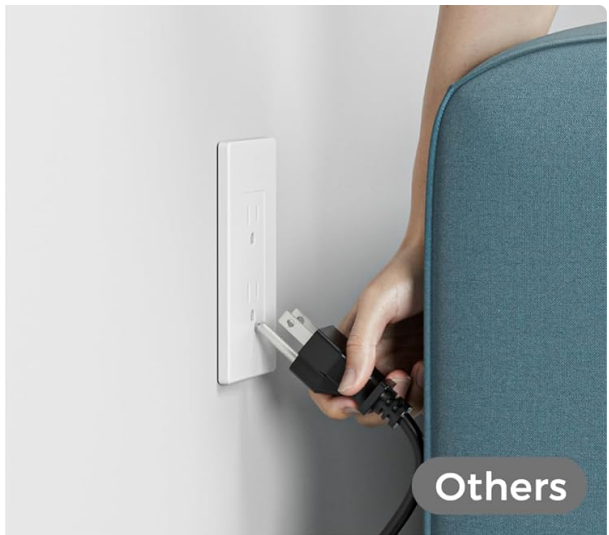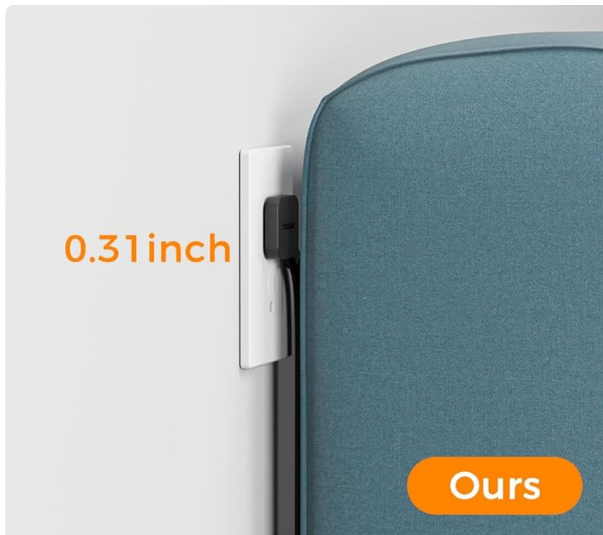

Flat Plug Power Strip

Suitable for use behind furniture



Image: A 15-foot flat extension cord extending from a wall outlet to the power strip, illustrating its reach and discreet placement.

3. Mounting Options

The power strip includes two mounting holes on the back, allowing for secure installation on walls or under desks. Additionally, four rubber feet provide stability and prevent slipping when placed on flat surfaces.

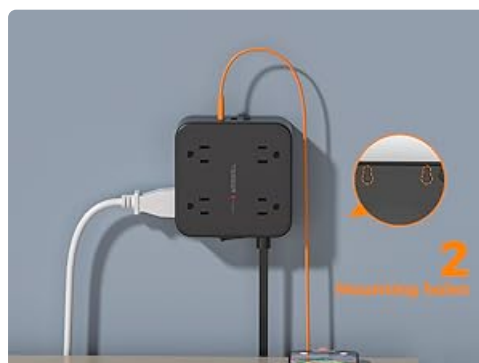


Image: The underside of the power strip, highlighting the two mounting holes for wall or desk installation.

OPERATING INSTRUCTIONS

1. Connecting Devices

Plug the power strip into a standard 3-prong wall outlet. The power strip provides 8 widely spaced AC outlets, allowing you to connect multiple devices without blocking adjacent ports. Additionally, use the 2 USB-A ports (2.4A max per port) and 1 USB-C port (3A max) for charging compatible USB devices like smartphones, tablets, and earphones.



Image: The power strip with various devices connected to its USB-A and USB-C ports, illustrating its charging capabilities.

2. Power On/Off Switch

The power strip is equipped with a reliable on/off switch that also functions as a reset button. Press the switch to turn the power strip on or off. In case of an overload, the switch will automatically trip to protect connected devices. To reset, simply switch it off and then back on.



Image: Close-up of the power strip's on/off switch, which also serves as an overload protection reset button.

SAFETY AND PROTECTION

The TESSAN power strip provides 900 Joules of surge protection, safeguarding your valuable electronics from voltage fluctuations, surges, and spikes. It also includes overload protection, short-circuit protection, and over-current protection to ensure a safe charging environment.



Image: An X-ray view of the power strip, highlighting its internal components for 900J surge protection.

MAINTENANCE

To ensure optimal performance and longevity of your TESSAN power strip, keep it clean and free from dust. Disconnect the power strip from the wall outlet before cleaning. Use a dry, soft cloth to wipe the exterior. Avoid using liquid cleaners or abrasive materials.

TROUBLESHOOTING

Power Strip Not Functioning:

- Ensure the power strip is securely plugged into a working wall outlet.
- Check the on/off switch. If it has tripped (indicating an overload), switch it to the 'OFF' position, then back to 'ON' to reset.
- Verify that the total power consumption of connected devices does not exceed the maximum rating of 1250W.

SPECIFICATIONS

Feature	Detail
Brand	TESSAN
Model Number	TS-1026-C
Total Power Outlets	8 AC Outlets
Total USB Ports	3 (2 USB-A, 1 USB-C)
USB-A Output	5V === 2.4A MAX Per Port
USB-C Output	5V === 3A MAX
Total DC Output	15W
Ratings	125V~10A MAX 1250W MAX
Surge Protection Rating	900 Joules
Cord Length	15 feet
Plug Type	Type B - 3 pin (North American)
Recommended Use	Indoor, Office, Home, College Dorm Room
Enclosure Material	Acrylonitrile Butadiene Styrene, Aluminum, Copper, Polycarbonate, Rubber

WARRANTY AND SUPPORT

This TESSAN product comes with an 18-month warranty. For any questions, technical support, or warranty claims, please contact the manufacturer, Zhuhai TESSAN Power Technology Co., Ltd., or refer to the contact information provided with your purchase.

HELPFUL VIDEOS

Video: A detailed review of the TESSAN 5 ft Power Strip, highlighting its features and benefits.

Video: An independent review showcasing the practicality and usefulness of the TESSAN power strip.

Video: A user demonstrating the multiple available outlets on the TESSAN power strip.