

Gicorino H13

Gicorino H13 Wireless Lavalier Microphone User Manual

Model: H13 | Brand: Gicorino

1. INTRODUCTION

Thank you for choosing the Gicorino H13 Wireless Lavalier Microphone. This device is designed to provide high-quality audio recording for various applications, including video recording, interviews, live streaming, and podcasts. It offers broad compatibility with iOS, Android, and computer systems. Please read this manual carefully to ensure proper setup and operation.

2. WHAT'S IN THE BOX

- 2 x Wireless Microphones (Transmitters)
- 1 x Android Receiver (USB Type-C)
- 1 x Type-C to USB Adapter
- 1 x Type-C to Lightning Adapter
- 1 x Charging Cable
- 2 x Extra Anti-spray Sponges

3. PRODUCT OVERVIEW

The Gicorino H13 Wireless Lavalier Microphone system consists of two compact transmitters (microphones) and one receiver. Each component is designed for ease of use and portability.



ONE PAIRING TWO

Two microphones can be connected at the same time

-  7 hours Working
-  Automatic connection
-  Omnidirectional Sound Receptio
-  Rechareable Microphone
-  Wireless Transmission



Image: Gicorino Wireless Lavalier Microphone system showing two microphones and a receiver.

The microphones feature a clip for easy attachment to clothing, a power button, and a USB charging port. The receiver includes a connector for your device and an indicator light.



Image: Diagram highlighting the omnidirectional sound pickup and intelligent noise reduction chip of the microphone.

4. SETUP

The Gicorino H13 Wireless Lavalier Microphone is designed for automatic pairing and plug-and-play functionality.

4.1 Initial Setup Steps:

1. **Charge the Microphones:** Before first use, ensure both wireless microphones are fully charged using the provided charging cable. The red light will flash when the battery is low.
2. **Disable Bluetooth:** Ensure your phone's Bluetooth is turned off before connecting the receiver.
3. **Connect the Receiver:** Plug the appropriate receiver (USB Type-C for Android/newer iPhones, or Lightning adapter for older iPhones) into your device's charging port.
4. **Power On Microphones:** Press and hold the power button on each microphone for 2-3 seconds to turn them on.
5. **Automatic Pairing:** The microphones and receiver will automatically pair. A solid green light on the microphone indicates a successful connection.



Image: Visual guide for the plug-and-play setup process: Plug receiver, press microphone power, connected.

4.2 Android Device Specific Setting (OTG Function):

For most Android devices, you must enable the "OTG" (On-The-Go) function in your phone's settings before using the microphone. This allows your device to recognize external USB accessories.

1. Go to your Android device's **Settings**.

2. Use the search bar within settings and type "OTG".
3. Locate and enable the "OTG Connection" function. This function may automatically disable if not used within 5 minutes on some devices.



Image: Screenshot demonstrating how to enable the OTG function in Android settings for microphone compatibility.

4.3 Computer/Laptop Setup:

To use with a computer or laptop, connect the receiver using the Type-C to USB adapter. You may need to select the microphone as the input device in your computer's sound settings.

1. Connect the Type-C receiver to the Type-C to USB adapter.
2. Plug the USB adapter into an available USB port on your computer.
3. Navigate to your computer's sound settings (e.g., System Preferences > Sound on Mac, or Sound Settings on Windows).
4. Select "USB Audio 1.0" or a similar option as your input device.



Image: Screenshot illustrating the selection of "USB Audio 1.0" as the sound input device on a computer.

5. OPERATING INSTRUCTIONS

5.1 Recording:

Once the microphones are paired with the receiver, open your preferred recording application (camera app, voice recorder, etc.) on your device and begin recording. The microphone will capture audio omnidirectionally with noise reduction.

5.2 Mute Function:

To pause recording, short press the power button on the microphone. The green light will flash. To resume recording, short press the power button again. The green light will become solid.

5.3 Charging:

The microphone transmitters have a built-in rechargeable battery with up to 6 hours of operating time. They can be charged while recording. The receiver does not require charging as it draws power from the connected device.

- **Microphone Charging:** Connect the charging cable to the USB charging port on the microphone. A red light indicates charging, and a green light indicates a full charge.

- **Low Battery Indication:** When the red light on the microphone flashes, it indicates a low battery. Recharge promptly.
- **Phone Charging:** The receiver has a pass-through port allowing you to charge your phone while the microphone system is in use.

6. COMPATIBILITY

The Gicorino H13 Wireless Lavalier Microphone is compatible with a wide range of devices:

- **iOS Devices:** iPhone 14 and below (using Lightning adapter), and the latest iPhone 15, 16, 17, and iPad series with Type-C ports.
- **Android Devices:** Most Android smartphones (except Samsung Galaxy A03s and Moto G Stylus 5G). Remember to enable the OTG function.
- **Computers/Laptops:** Compatible with laptops, PCs, and MacBooks using the Type-C to USB adapter.

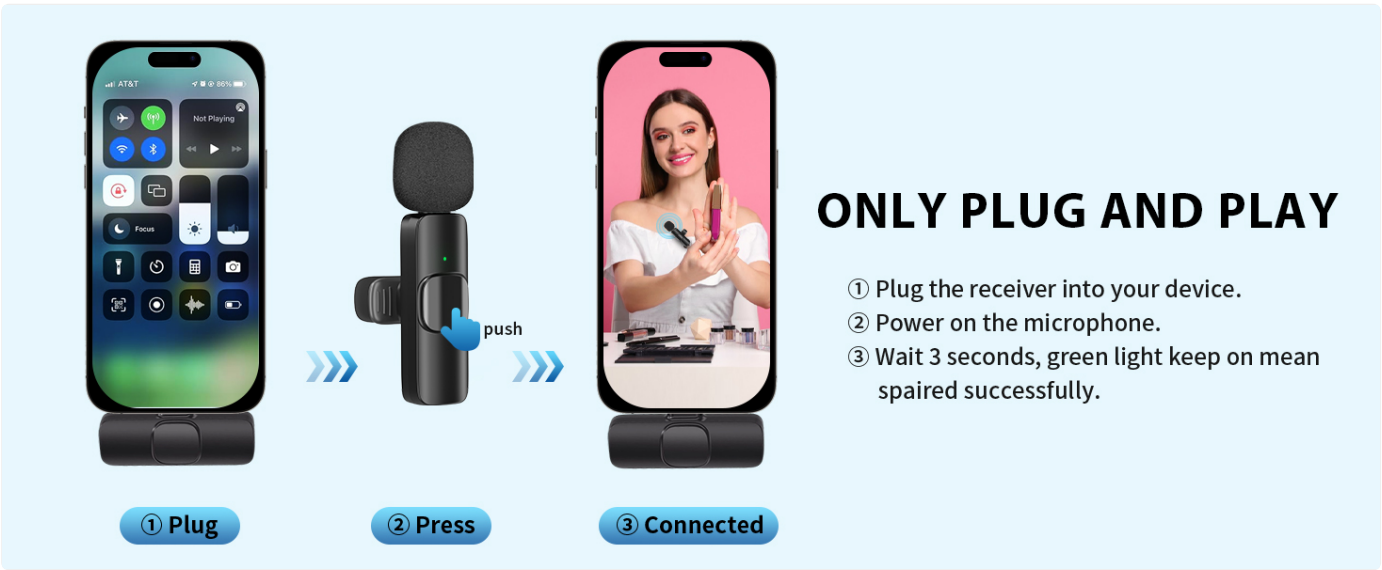


Image: Visual representation of the microphone's compatibility with various phones (iOS & Android) and laptops/PCs.

7. MAINTENANCE

To ensure the longevity and optimal performance of your Gicorino H13 Wireless Lavalier Microphone, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to clean the microphone and receiver. Avoid using liquids or abrasive cleaners.
- **Storage:** Store the device in a cool, dry place away from direct sunlight and extreme temperatures. Use the provided carrying case for protection during transport.
- **Handle with Care:** Avoid dropping the device or subjecting it to strong impacts.
- **Battery Care:** Fully charge the microphones before long periods of non-use to maintain battery health.

8. TROUBLESHOOTING

If you encounter issues with your Gicorino H13 Wireless Lavalier Microphone, refer to the following common solutions:

Problem	Solution
Microphone not connecting/pairing	Ensure both microphones are charged and powered on. Verify the receiver is securely plugged into your device. Turn off your phone's Bluetooth. For Android, check if OTG function is enabled.
No audio recorded	Confirm successful pairing (solid green light on microphone). Check your device's audio input settings to ensure the external microphone is selected. Increase recording volume in your device's settings.

Problem	Solution
Poor audio quality/noise	Ensure microphones are positioned correctly and not obstructed. Replace anti-spray sponges if worn. Avoid recording in excessively noisy environments.
Microphone battery drains quickly	Ensure microphones are fully charged before use. Avoid leaving them powered on when not in use.
Receiver not recognized by Android device	Enable the OTG function in your Android device's settings. Some devices may require this to be manually turned on.

9. SPECIFICATIONS

Feature	Detail
Model Name	H13
Brand	Gicorino
Connectivity Technology	USB (2.4GHz Wireless Transmission)
Connector Type	USB Type-C, Lightning, USB-A (via adapter)
Compatible Devices	Smartphone (iOS & Android), Laptop, PC
Special Features	Wireless, Clip-on, Noise Reduction
Polar Pattern	Omnidirectional
Audio Sensitivity	90 Decibels
Signal-to-Noise Ratio	80 dB
Frequency Response	20 KHz
Operating Range	Up to 65 feet (20 meters) unobstructed
Battery Life (Transmitter)	Up to 6 hours
Item Weight	0.635 ounces (18 Grams)
Product Dimensions	4.76 x 3.19 x 1.22 inches

10. OFFICIAL PRODUCT VIDEO

Watch this official product video for a visual guide on the Gicorino Wireless Lavalier Microphone's features and operation.

Your browser does not support the video tag.

Video: Official Gicorino Wireless Lavalier Microphones Mini Microphone demonstration, showcasing features like noise reduction, plug-and-play setup, and charging capabilities.

11. WARRANTY AND SUPPORT

This product comes with a standard return policy of 30 days for refund or replacement. For technical support or warranty claims, please contact the Gicorino Official Store through your purchase platform. Refer to your purchase documentation for specific

warranty details and contact information.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question