

Reobiux A9QS

Reobiux 3-in-1 Dual Lens & 8X Zoom Outdoor Security Camera

Model: A9QS | Brand: Reobiux

1. PRODUCT OVERVIEW

The Reobiux A9QS is an advanced 3-in-1 outdoor security camera designed to provide comprehensive surveillance for your property. It features a unique dual-lens system with 8X digital zoom, delivering crisp 4K/8MP resolution and versatile monitoring capabilities. Equipped with color night vision, human detection, auto-tracking, and two-way audio, this camera ensures 24/7 security. Its IP66 weatherproof rating makes it suitable for various outdoor conditions, and it is compatible with Amazon Alexa for convenient voice control.

Key Features:

- **3-in-1 Dual Lens & 8X Digital Zoom:** Our security camera is equipped with three lenses: one fixed, one rotatable, and one with zoom function, providing versatility to easily switch between different shooting scenarios. Additionally, with the powerful 8X digital zoom function, the Wi-Fi camera allows you to easily zoom in on the target to capture exciting moments from a distance, maintaining exceptional sharpness in details.
- **4K Resolution & Color Night Vision:** The 4K security camera has two high-resolution lenses. This high resolution allows for sharp images with enhanced details. Our security cameras have three night light modes: infrared mode, color mode, and dual light alarm mode. Even in low light or complete darkness, the outdoor camera maintains the ability to capture clear and colorful images, ensuring 24-hour security.
- **Human Detection & Alarm Activation:** Our outdoor security camera is equipped with human detection. When someone approaches, the camera displays the trajectory and automatically tracks movement. The surveillance camera can activate real-time alarms. When a potential threat is detected, the iCSee application immediately sends an alert notification to your smartphone and captures images of the suspicious object.
- **Two-Way Audio & Multi-User Access:** The outdoor Wi-Fi camera features a built-in microphone and speaker for communication from your mobile device, whether to greet visitors, give instructions, or warn intruders. Additionally, the security camera allows sharing access with multiple users, providing access to family, friends, or security personnel.
- **SD Card / Cloud Storage & Alexa Compatible:** The outdoor security camera can record 24 hours a day, regardless of weather conditions. You can use a Micro SD card (up to 128 GB) or a cloud server to locally store

your recordings, giving you quick and hassle-free access to your videos. It is also compatible with Amazon Alexa for voice control, freeing your hands.



Image: Reobix A9QS 3-in-1 Dual Lens Outdoor Security Camera with a smartphone displaying its live feed and control options.

2. SETUP AND INSTALLATION

2.1 Package Contents:

- Security Camera x 1
- Power Cable x 1
- Instruction Manual x 1

- Installation Screw Package x 1

2.2 Physical Installation:

The camera is designed for wall mounting. Use the provided screw package to securely attach the camera to your desired outdoor location. Ensure the camera is positioned to cover the desired surveillance area, considering its pan (355°) and tilt (90°) capabilities.

3 IN 1 PTZ Control

Dual Lens,dual screens,
cover more details

Fixed Lens

Pan 355°

Zoom Lens

Rotating Lens

Tilt 90°



Image: The Reoblux A9QS camera mounted on a wall, illustrating its fixed lens, zoom lens, rotating lens, and pan/tilt capabilities.

2.3 App Connection (iCSee App):

To connect your camera, follow these steps using the iCSee app:

1. **Download the iCSee App:** Scan the QR code below or visit <http://d.xmeye.net/CSee> to download the iCSee

application from Google Play or the App Store.



Image: QR codes for downloading the iCSee app from Google Play and Apple App Store.

2. **Enable Bluetooth and Wi-Fi:** Open "Settings" on your phone and activate "WLAN" (Wi-Fi) and "Bluetooth".



Image: Screenshot illustrating how to enable WLAN and Bluetooth in phone settings.

3. **Open iCSee App and Connect:** Open the iCSee app and proceed to connect the camera. Register an account and log in if you haven't already.
4. **Add Device:** Tap on "Add device". The phone will detect the camera via Bluetooth. Confirm by tapping "OK".
5. **Enter Wi-Fi Password:** Input your 2.4GHz Wi-Fi password and click "Next". Note: The camera only supports 2.4GHz Wi-Fi, not 5GHz.
6. **Connection Complete:** The device will connect. Once successful, you can name your camera and select video storage methods.

Your browser does not support the video tag.

Video: A step-by-step guide on quickly connecting the camera to the iCSee app via Bluetooth.

3. OPERATING INSTRUCTIONS

3.1 Dual Lens & Zoom Functionality:

The camera features a fixed lens and a rotatable lens with 8X digital zoom. This allows for both wide-angle monitoring and detailed close-ups. You can switch between lenses and control the zoom via the iCSee app.

Dual 4MP Lens

Better than 1080P, See clearer, gives you more details

1080P

4K QHD



Image: Visual comparison demonstrating the clarity and detail provided by the 4K QHD resolution from the dual 4MP lenses compared to 1080P.

Your browser does not support the video tag.

Video: Demonstration of the Reobiux dual lens functionality.

3.2 Night Vision Modes:

The camera offers three night vision modes:

- **Infrared Mode:** Standard black and white night vision.
- **Color Mode:** Utilizes built-in lights to provide full-color images even in low light.
- **Dual Light Alarm Mode:** Combines infrared and color modes, activating bright lights upon detection for enhanced visibility and deterrence.

4K Color/IR Night Vision

See clearly even in the night, protect your home



Image: Comparison showing the difference between infrared night vision (black and white) and full-color night vision, highlighting improved visibility in color mode.

3.3 Human Detection & Auto-Tracking:

The camera can detect human figures and automatically track their movement within its field of view. This feature helps in

focusing on relevant events and reducing false alarms from other movements.



Image: Illustration of the camera's ability to differentiate between human and animal movement for accurate detection.

3.4 Two-Way Audio:

Communicate with visitors or deter intruders using the built-in microphone and speaker. This feature allows for real-time conversations through the iCSee app.

Two-Way Audio

Built-in microphone and speakers,
know your visitors easily.



Thanks, leave it at the door.

Hello, you have a package!



Image: A person speaking through the camera to a delivery person at the door, demonstrating the two-way audio feature.

3.5 Storage Options:

The camera supports both local storage via a Micro SD card (up to 128GB, not included) and cloud storage (subscription required via the app). It can record 24/7, providing continuous surveillance.

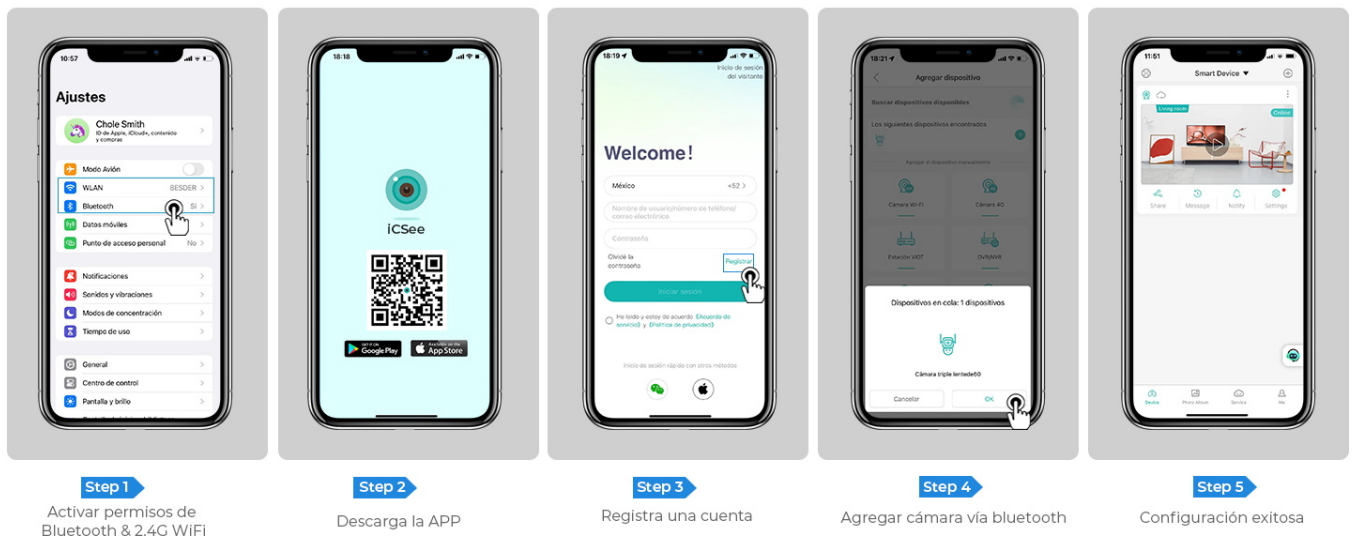


Image: Visual representation of cloud storage and Micro SD card storage options, emphasizing 24/7 continuous recording.

4. MAINTENANCE

- **Cleaning:** Regularly wipe the camera lens and body with a soft, damp cloth to remove dust and dirt. Avoid abrasive cleaners.
- **Firmware Updates:** Check the iCSee app periodically for firmware updates to ensure optimal performance and security.
- **Power Supply:** Ensure the power cable is securely connected and free from damage.
- **Weather Protection:** While IP66 rated, avoid direct, prolonged exposure to extreme weather conditions if possible to extend product lifespan.

Real-time push & Sound alarm



Audio



Siren



Light

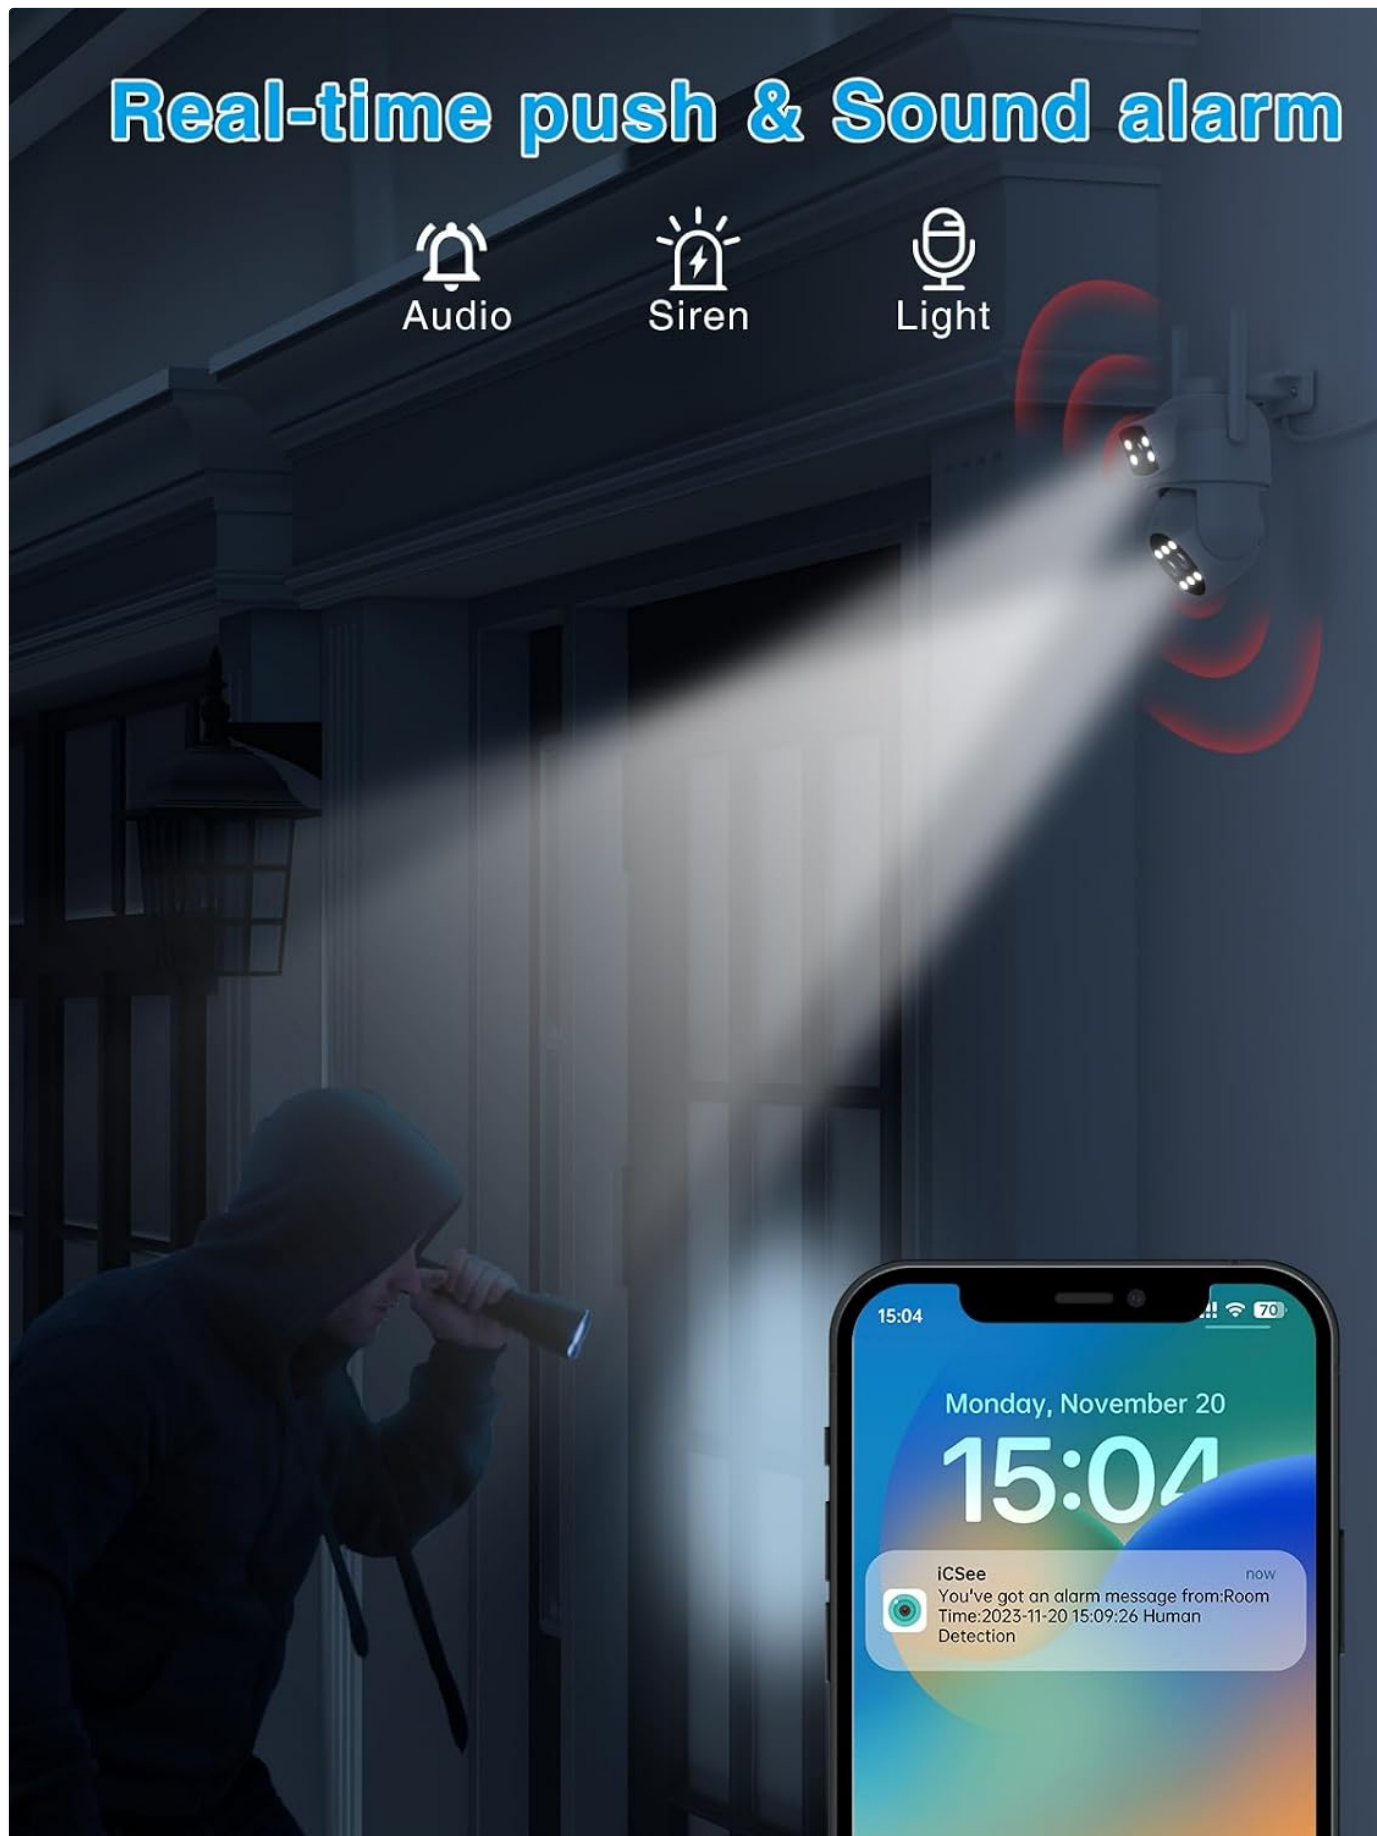


Image: The camera shown enduring various weather conditions, highlighting its IP66 waterproof rating and temperature tolerance.

5. TROUBLESHOOTING

- **Camera not connecting to Wi-Fi:**

- Ensure your Wi-Fi is 2.4GHz. This camera does not support 5GHz Wi-Fi.
- Check Wi-Fi signal strength at the camera's location.
- Verify the Wi-Fi password entered in the app is correct.
- Restart the camera and your router.

- **Lights not turning on/Night Vision issues:**

- Check night vision settings in the iCSee app to ensure the desired mode (Infrared, Color, or Dual Light Alarm) is selected and activated.
- Ensure there is sufficient power supply to the camera.

- **App freezing or slow performance:**

- Restart the iCSee app.
- Ensure your smartphone's operating system is up to date.
- Check your internet connection speed.

- **Video playback issues (e.g., .mp4 files not playing):**

- Some mobile devices may require specific video players or codecs for .mp4 files downloaded from the app. Try a different video player app if issues persist.

- **Camera stopped working after a few months:**

- Ensure the camera has a stable power supply.
- Check for any physical damage or environmental factors (e.g., extreme weather exposure).
- Contact Reobix customer support for further assistance.

6. SPECIFICATIONS

Feature	Detail
Video Capture Resolution	8 MP
Color	A9QS
Number of Items	1
Included Components	Security Camera*1, Power Cable*1, Instruction Manual*1, Installation Screw Package*1
Number of Channels	2
Wireless Communication Technology	Bluetooth, Wi-Fi
Installation Type	Bluetooth and Wi-Fi Connection
Night Vision Range	20 Meters

Material	Plastic
Voltage	12 Volts
Wattage	6 watts
Manufacturer	Reobiux
Part Number	REO-MX-A9QS
Size	A9QS
Bulb Type	Infrared/LED
Special Features	Dual lens + dual screen + 8X Zoom, Bluetooth Connection, 6MP Pixel, No blind spot
Recommended Uses for Product	Supports 2.4GHz Wi-Fi only, does not support 5G
Connectivity Technology	Bluetooth, Wi-Fi
Special Feature	Dual lens + dual screen + 8X Zoom, Bluetooth Connection, 6MP Pixel, No blind spot
Indoor/Outdoor Use	Outdoor
Power Source	Corded Electric
Controller Type	Iris, Android, Amazon Alexa
Mounting Type	Wall Mount

7. WARRANTY AND SUPPORT

For any product inquiries, technical support, or warranty claims, please contact Reobiux customer service. Refer to the contact information provided in your product packaging or on the official Reobiux website.

Note: The product is designed for outdoor use and has an IP66 rating, indicating protection against dust and powerful water jets. However, proper installation and care are essential for long-term performance.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question