Ohniyou GLX049

Ohniyou 96" Large Industrial Ceiling Fan User Manual

Model: GLX049 | Brand: Ohniyou

1. Important Safety Information

Read all instructions carefully before installation and use. Failure to follow these instructions could result in electric shock, fire, or serious personal injury. Always consult a qualified electrician for installation if you are unsure.

- Ensure the power is disconnected at the circuit breaker before installation or maintenance.
- All wiring must be in accordance with national and local electrical codes.
- The mounting structure must be capable of supporting the weight of the fan (approximately 41.6 pounds) plus the dynamic load during operation.
- Maintain a minimum clearance of 7 feet from the floor to the fan blades.
- Do not operate the fan with damaged wiring or if it has been dropped or damaged.

2. Product Overview

The Ohniyou 96" Large Industrial Ceiling Fan is designed to provide powerful and efficient air circulation in large spaces. Featuring a strengthened DC motor, it delivers a super large air volume while operating quietly and being energy-saving. Its reversible function allows for year-round use, providing cooling in summer and improved air circulation for warmth in winter.



Figure 2.1: The Ohniyou 96" Large Industrial Ceiling Fan in silver finish.

Your browser does not support the video tag.

Video 2.1: A general overview of the Ohniyou 96" Silver Industrial Ceiling Fan, showcasing its size and features.

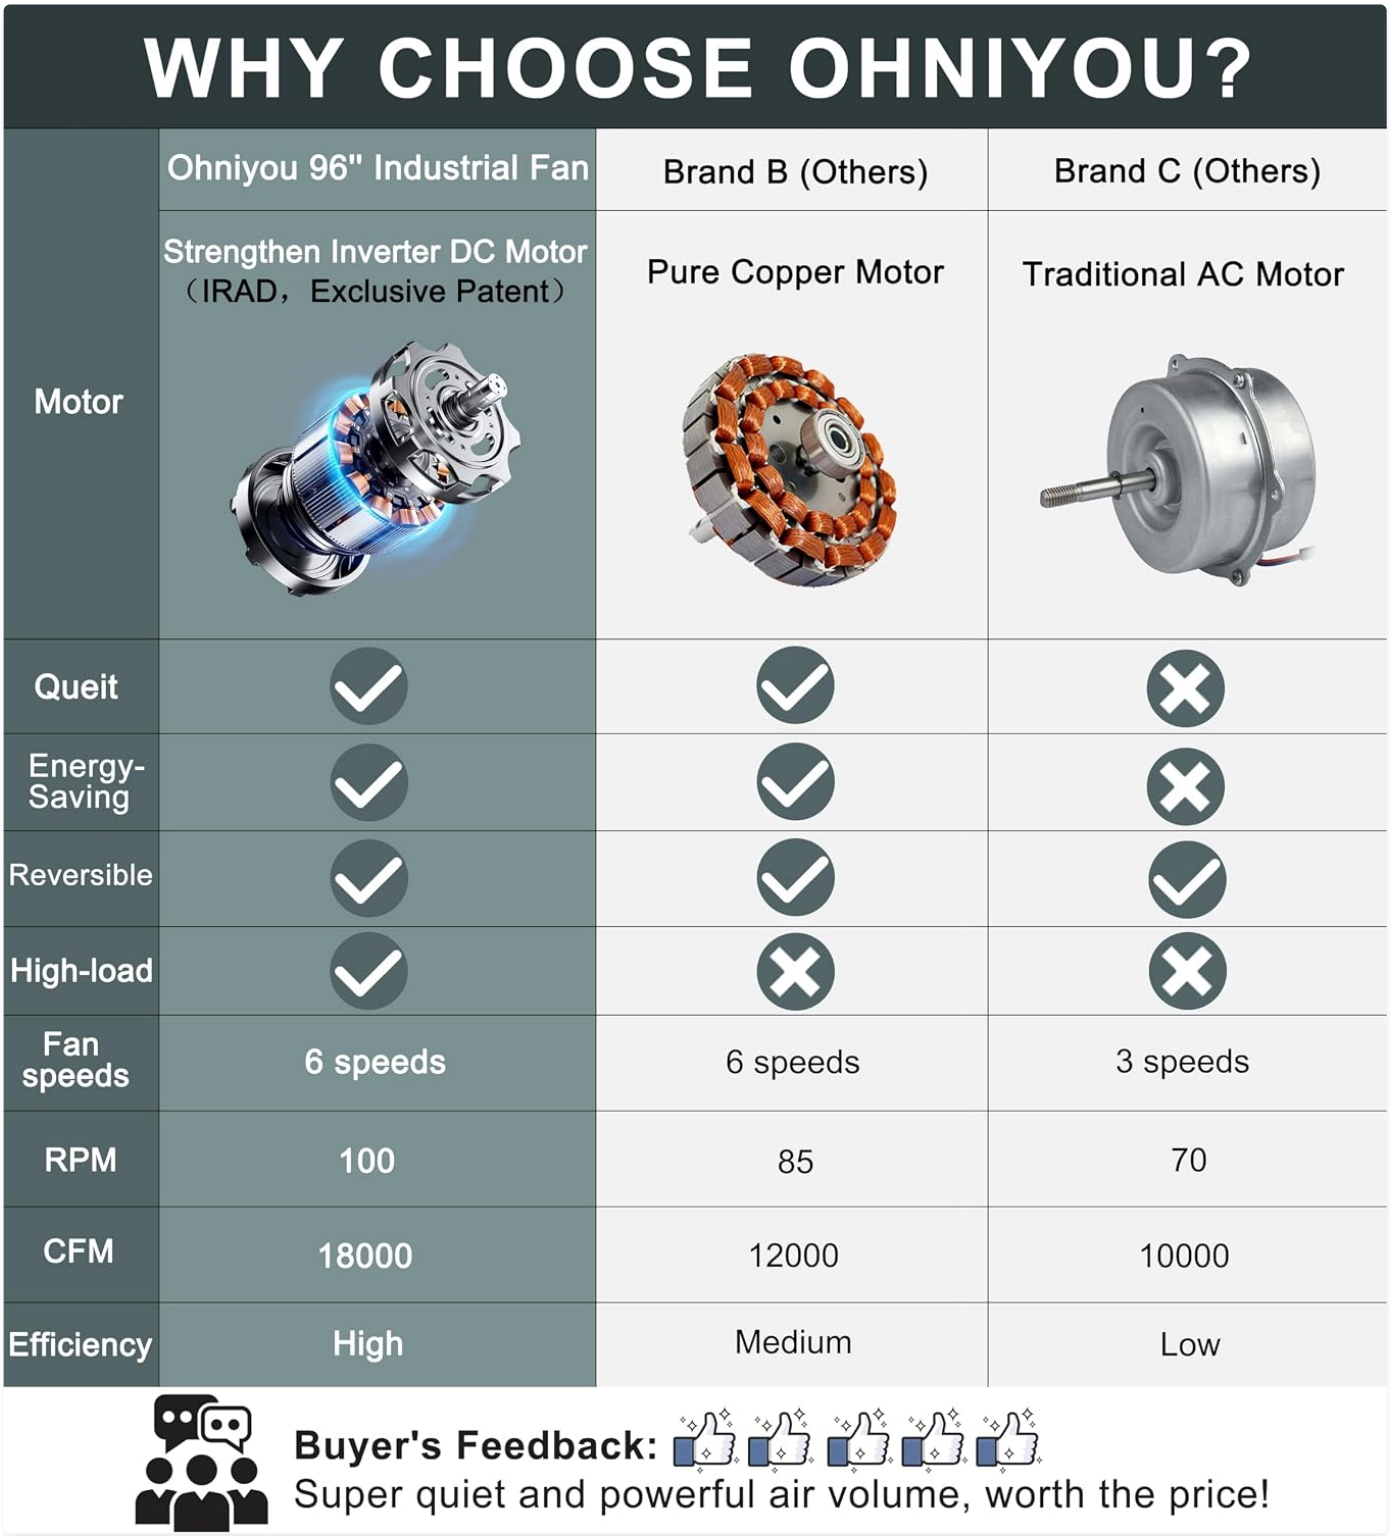


Figure 2.2: Comparison of Ohniyou 96" Industrial Fan features against other brands, highlighting its superior RPM, CFM, and quiet operation.

3. Package Contents

Verify all components are present before beginning installation. Refer to the assembly video (Video 4.1) for a visual guide of the package list.

- Motor Body (1)
- Fan Blades (8)
- Fan Blade Arms (8)
- Fan Blades Edge Cover (8)

- 19.5-inch Downrod (2)
- 39-inch Downrod (1)
- Downrod Connector (2)
- Canopy (1)
- Motor Cover (1)
- Mounting Bracket (1)
- Controller (1)
- Remote Control (1)
- Extension Wire (2)
- Fixing Screws (various quantities)
- Expansion Screws (various quantities)
- Fan Blade Arms Screws (various quantities)

4. Setup & Installation

Follow these steps for proper assembly and installation of your ceiling fan. It is recommended to have at least two people for installation due to the fan's size and weight.

4.1 Fan Assembly

This video provides a comprehensive guide to assembling the fan components, including attaching the fan blade arms and blades to the motor body.

Your browser does not support the video tag.

Video 4.1: Detailed assembly process for the Ohniyou 96-inch fan, covering fan blade and motor preparation.



Figure 4.1: Close-up view of the fan motor and blade attachment points, highlighting the energy-saving DC motor.

4.2 Downrod Extension

The fan includes multiple downrods (19.5" and 39") that can be connected using the provided downrod connectors to achieve a maximum length of 78" for high ceilings.

Your browser does not support the video tag.

Video 4.2: Instructions on how to extend the downrod using the provided connectors to suit different ceiling heights.

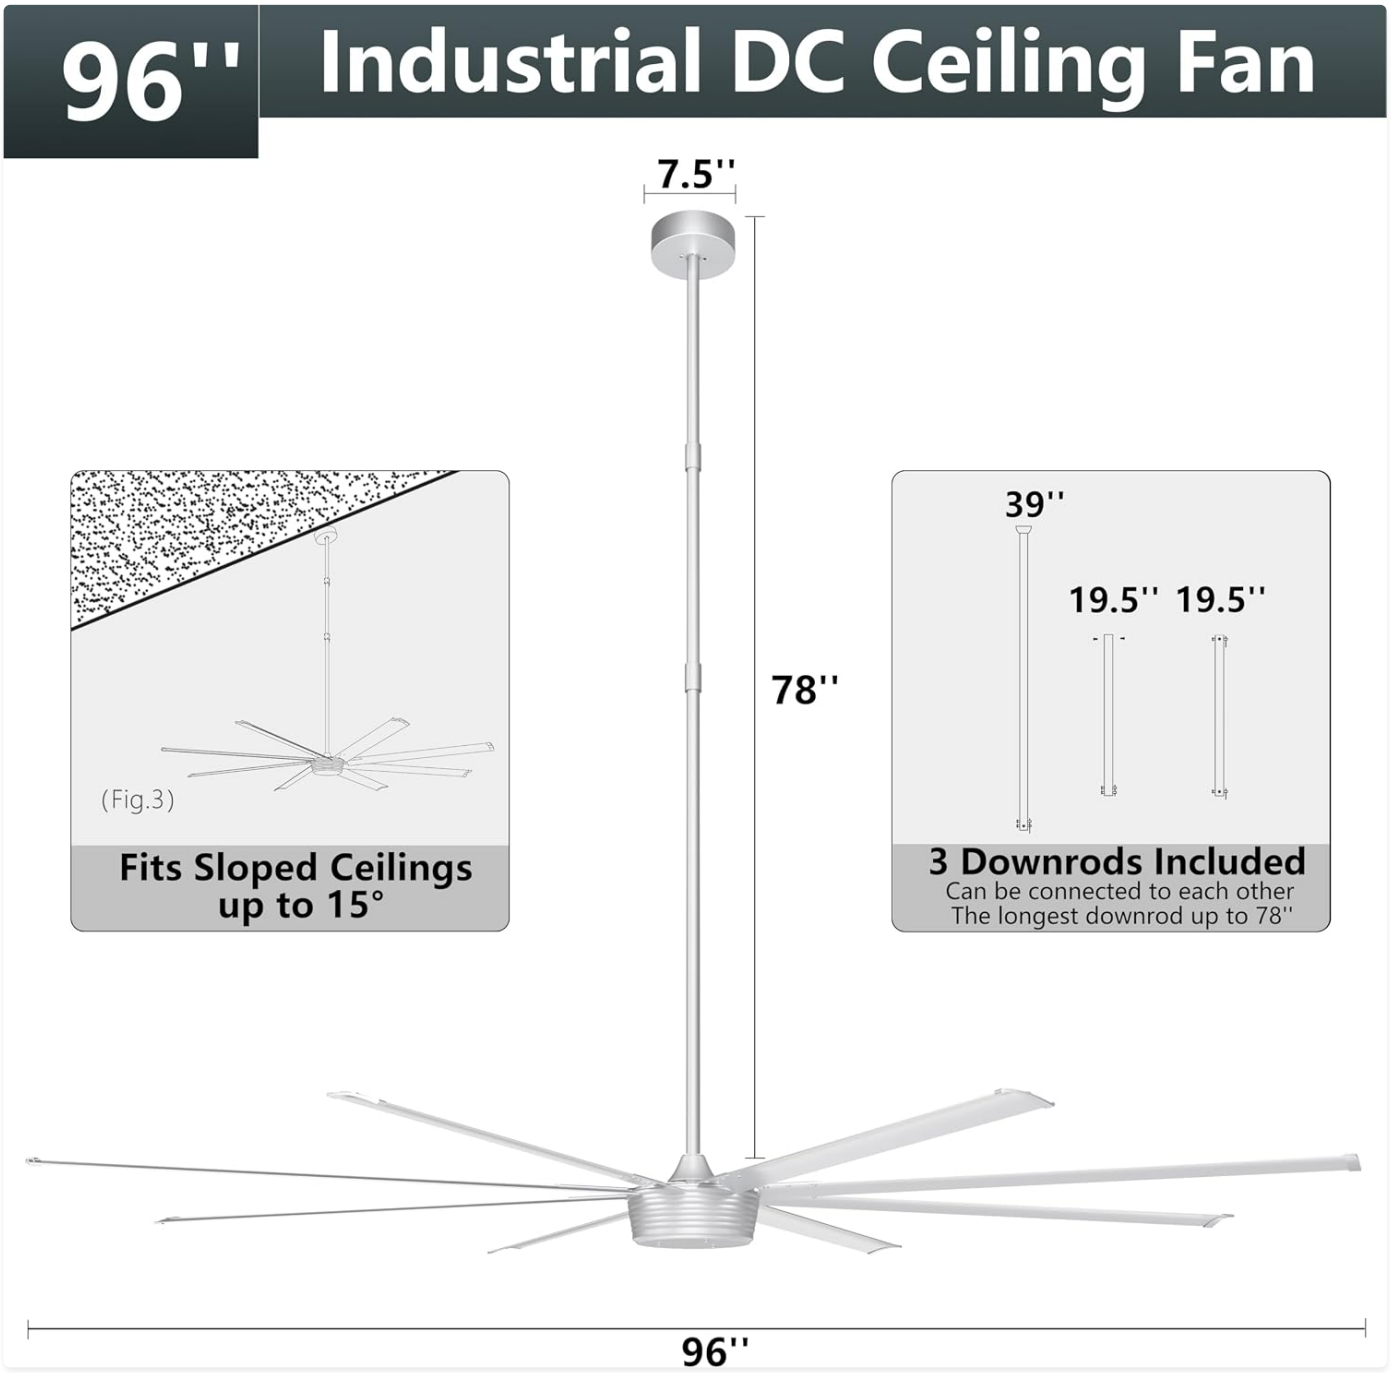


Figure 4.2: Diagram illustrating the available downrod lengths and the fan's compatibility with sloped ceilings up to 15 degrees.

4.3 Downrod Connection

Securely connect the downrod to the fan motor and the mounting bracket using the provided latches and hairpin buckles.

Your browser does not support the video tag.

Video 4.3: Guide on connecting the downrods securely to the fan motor and mounting bracket.

4.4 Steel Wire Installation

The steel wire provides an essential safety measure. Ensure it is properly installed and secured to the mounting bracket and the fan motor for added stability.

Your browser does not support the video tag.

Video 4.4: Step-by-step instructions on how to install and secure the steel safety wire.

4.5 Electrical Connection

Connect the receiver wires to the fan motor wires, matching colors. Then, connect the receiver to your household electrical wiring. Always ensure power is off at the circuit breaker before making electrical connections.

5. Operating Instructions

Your Ohniyou ceiling fan is operated via the included remote control. Ensure the remote has 2 AAA batteries (not included) installed.

5.1 Remote Control Functions

The remote control allows you to adjust fan speed, direction, and set timers.

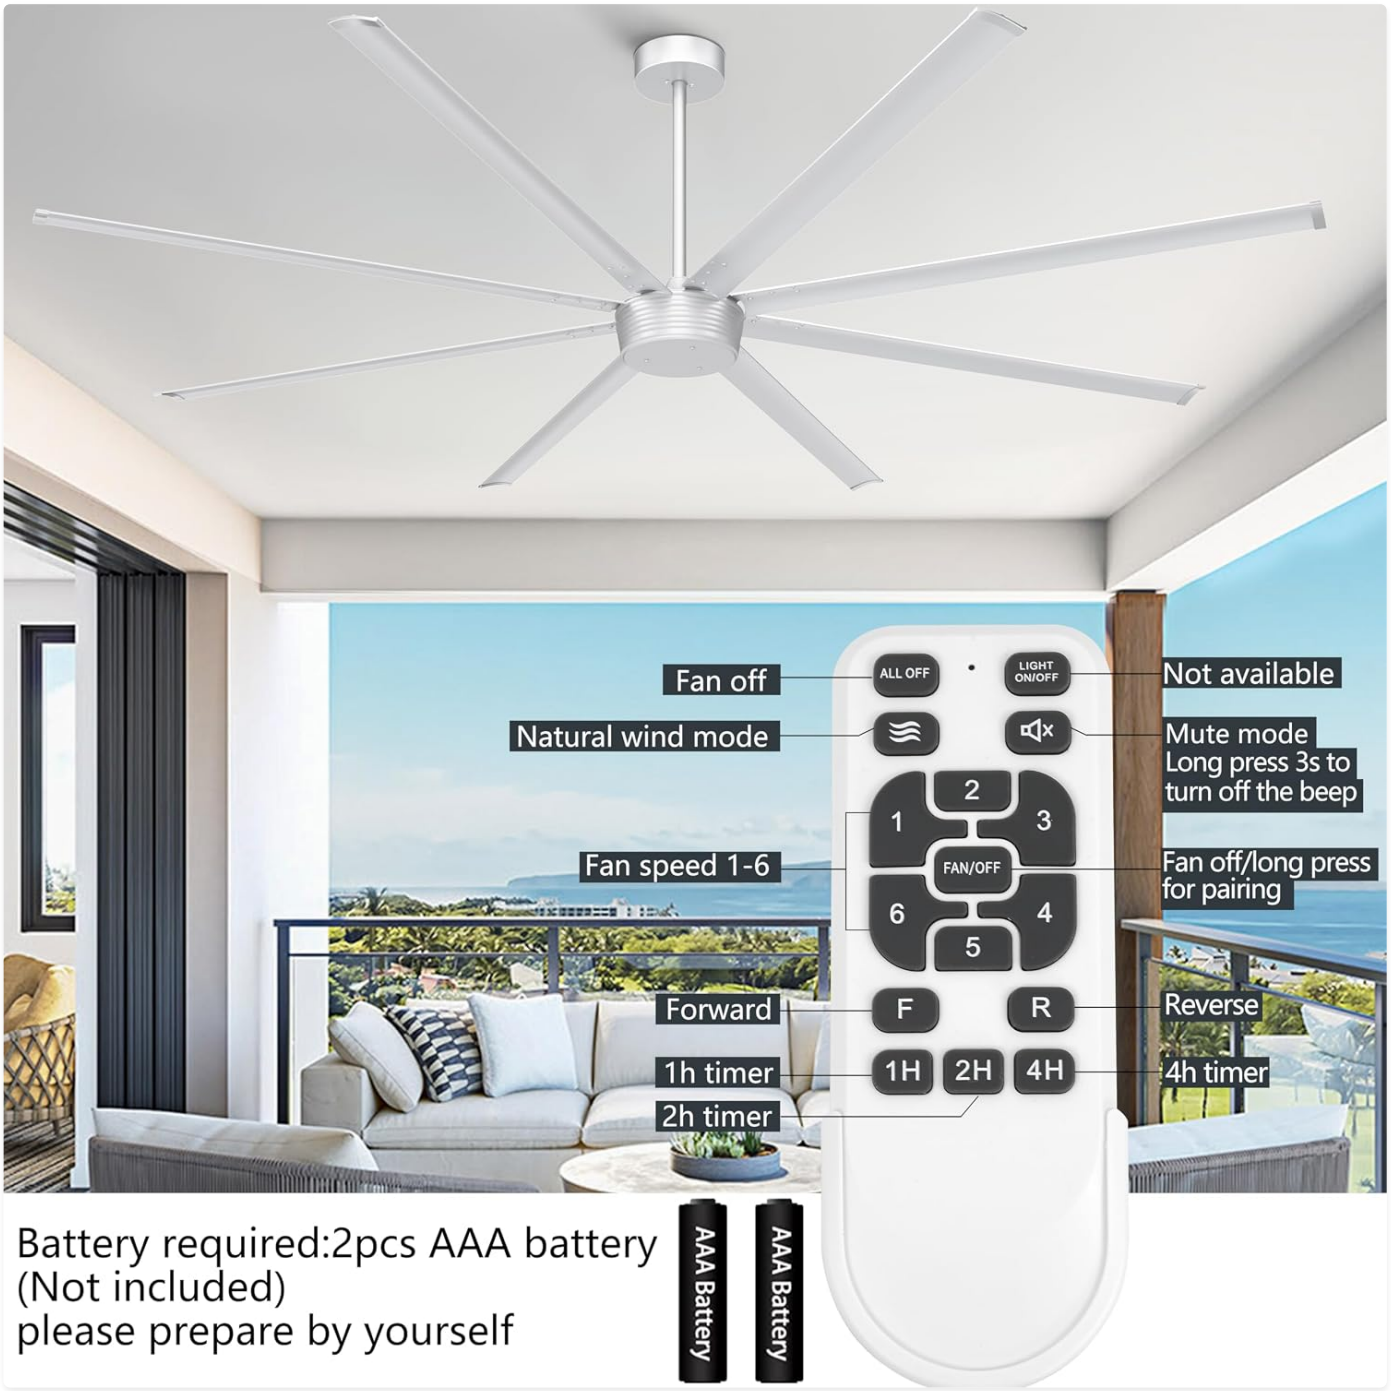


Figure 5.1: Layout of the remote control with buttons for fan speed (1-6), natural wind mode, forward/reverse, and timer settings (1H, 2H, 4H).

- **Fan Speed (1-6):** Adjusts the fan's rotation speed.
- **Natural Wind Mode:** Simulates a natural breeze by varying fan speed.
- **Forward (F) / Reverse (R):** Changes the direction of blade rotation.
- **Timer (1H, 2H, 4H):** Sets the fan to turn off automatically after 1, 2, or 4 hours.
- **Mute Mode:** Long press for 3 seconds to turn off the beep sound.
- **Fan On/Off:** Turns the fan on or off.

5.2 Summer and Winter Modes

The reversible motor allows for year-round use to optimize air circulation.

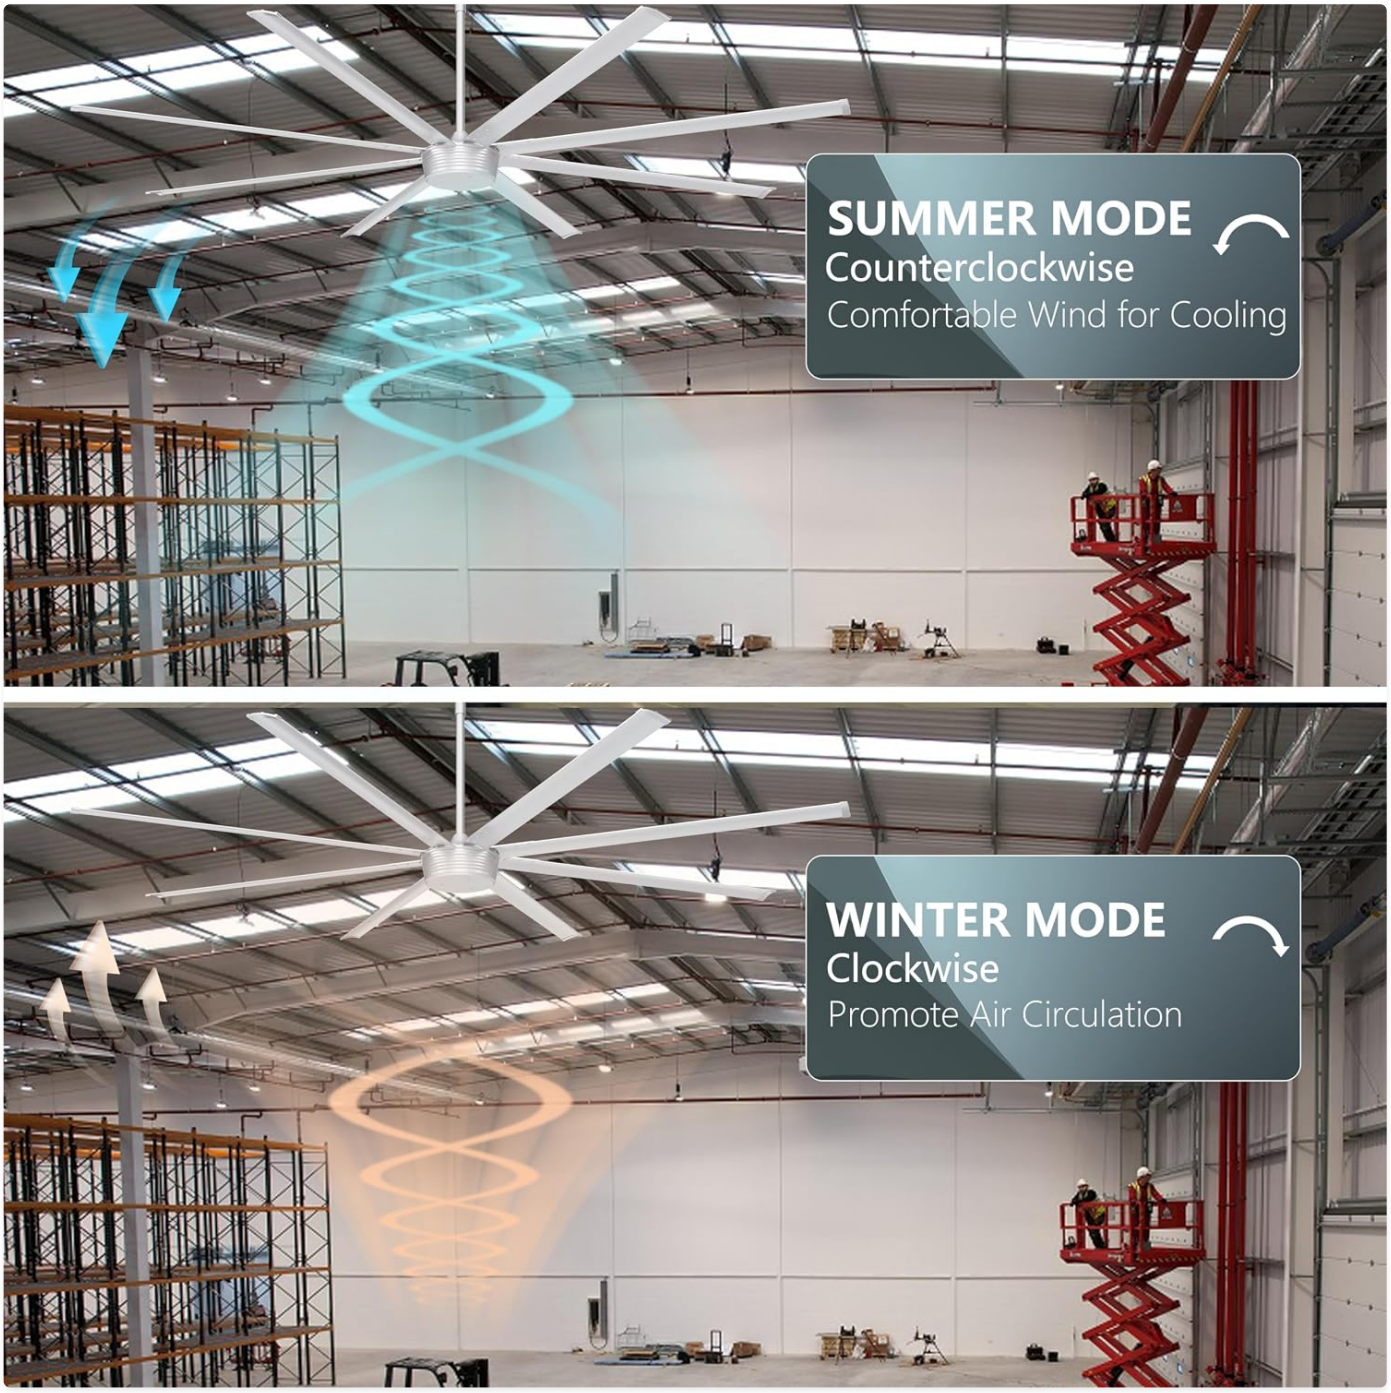


Figure 5.2: Visual representation of summer mode (counter-clockwise, downdraft for cooling) and winter mode (clockwise, updraft for air circulation).

- **Summer Mode (Counter-clockwise):** Creates a downdraft, producing a cooling effect. Ideal for warm weather.
- **Winter Mode (Clockwise):** Creates an updraft, circulating warm air trapped near the ceiling. Ideal for cold weather to improve heating efficiency.

6. Maintenance

Regular maintenance ensures optimal performance and longevity of your fan.

- **Cleaning:** Dust the fan blades and motor housing regularly with a soft, damp cloth. Do not use abrasive cleaners or solvents.
- **Inspection:** Periodically check all screws and connections to ensure they are secure. Tighten any loose fasteners.
- **Lubrication:** The fan's motor is permanently lubricated and does not require additional oiling.

7. Troubleshooting

This section addresses common issues you might encounter with your fan.

7.1 Remote Control Pairing

If your remote control is not responding, it may need to be re-paired with the fan.

Your browser does not support the video tag.

Video 7.1: Instructions on how to re-pair the remote control with your Ohniyou ceiling fan if it stops working.

7.2 Missing Parts

If any parts are missing from your package, please contact customer support for replacements.

Your browser does not support the video tag.

Video 7.2: Guidance on how to request replacement parts if your product package is incomplete.

8. Specifications

Detailed technical specifications for the Ohniyou 96" Large Industrial Ceiling Fan.

Feature	Detail
Brand	Ohniyou
Model Name	GLX049
Color	Silver No Light
Electric Fan Design	Ceiling Fan
Power Source	AC/DC
Style	Industrial
Product Dimensions	96"D x 96"W x 20"H
Room Type	Shop, Warehouse, Barn, Gym, Workshop
Special Feature	DC Motor, Remote Controlled
Recommended Uses	Cooling, Ventilating, Air Circulation
Noise Level	40 dB
Finish Type	Metal
Number of Blades	8
Air Flow Capacity	18000 Cubic Feet Per Minute
Blade Length	96 Inches
Speed	100 RPM
Voltage	120 Volts
Switch Type	Remote Only
Included Components	Remote, Downrods
Indoor/Outdoor Usage	Indoor
Control Method	Remote

Light Type	No Light
Blade Material	Metal
Item Weight	41.6 pounds
UPC	734906797244

9. Warranty & Support

For detailed warranty information and further assistance, please refer to the official user manual PDF or contact Ohniyou customer support.

- **Official User Manual (PDF):** Download Here
- **Customer Support Email:** ohniyou@ledphy.com (as indicated in product support videos)
- Ohniyou aims to reply within 12 hours for support inquiries.

© 2024 Ohniyou. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question