



[Manuals.plus](#) /

› [JONATHAN Y](#) /

› JONATHAN Y JYL1706A 4-Light LED Linear Pendant Light Instruction Manual

## JONATHAN Y JYL1706A

# JONATHAN Y JYL1706A 4-Light LED Linear Pendant Light Instruction Manual

Model: JYL1706A

## INTRODUCTION

Welcome to your new JONATHAN Y JYL1706A 4-Light LED Linear Pendant Light. This manual provides detailed instructions for safe installation, operation, and maintenance of your new lighting fixture. Please read this manual thoroughly before installation and keep it for future reference.

This modern pendant light features four clear glass cylindrical shades and an integrated LED design, offering a blend of transitional and glam aesthetics. It is dimmable and features adjustable height for versatile placement in areas such as kitchen islands and dining rooms.

Your browser does not support the video tag.

Official product overview video for the JONATHAN Y JYL1706A 4-Light LED Linear Pendant Light, showcasing its design and features.


## IMPORTANT SAFETY INFORMATION

- **WARNING:** To avoid electric shock, always turn off the power at the main circuit breaker or fuse box before beginning installation or performing any maintenance.
- All wiring must be in accordance with national and local electrical codes. If you are unfamiliar with wiring, consult a qualified electrician.
- This fixture is designed for indoor use only. Do not expose to water or moisture.
- Do not attempt to alter the fixture or its components.
- Integrated LED components are not replaceable.
- Professional installation is recommended for all ceiling light fixtures.
- **Proposition 65 Warning:** This product may contain chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

## PACKAGE CONTENTS

Carefully unpack your fixture and check that all parts are included.

- 1 x Linear Pendant Light Fixture (JYL1706A)
- 4 x Clear Glass Shades
- Installation Hardware Kit (screws, wire nuts, mounting bracket)
- Instruction Manual

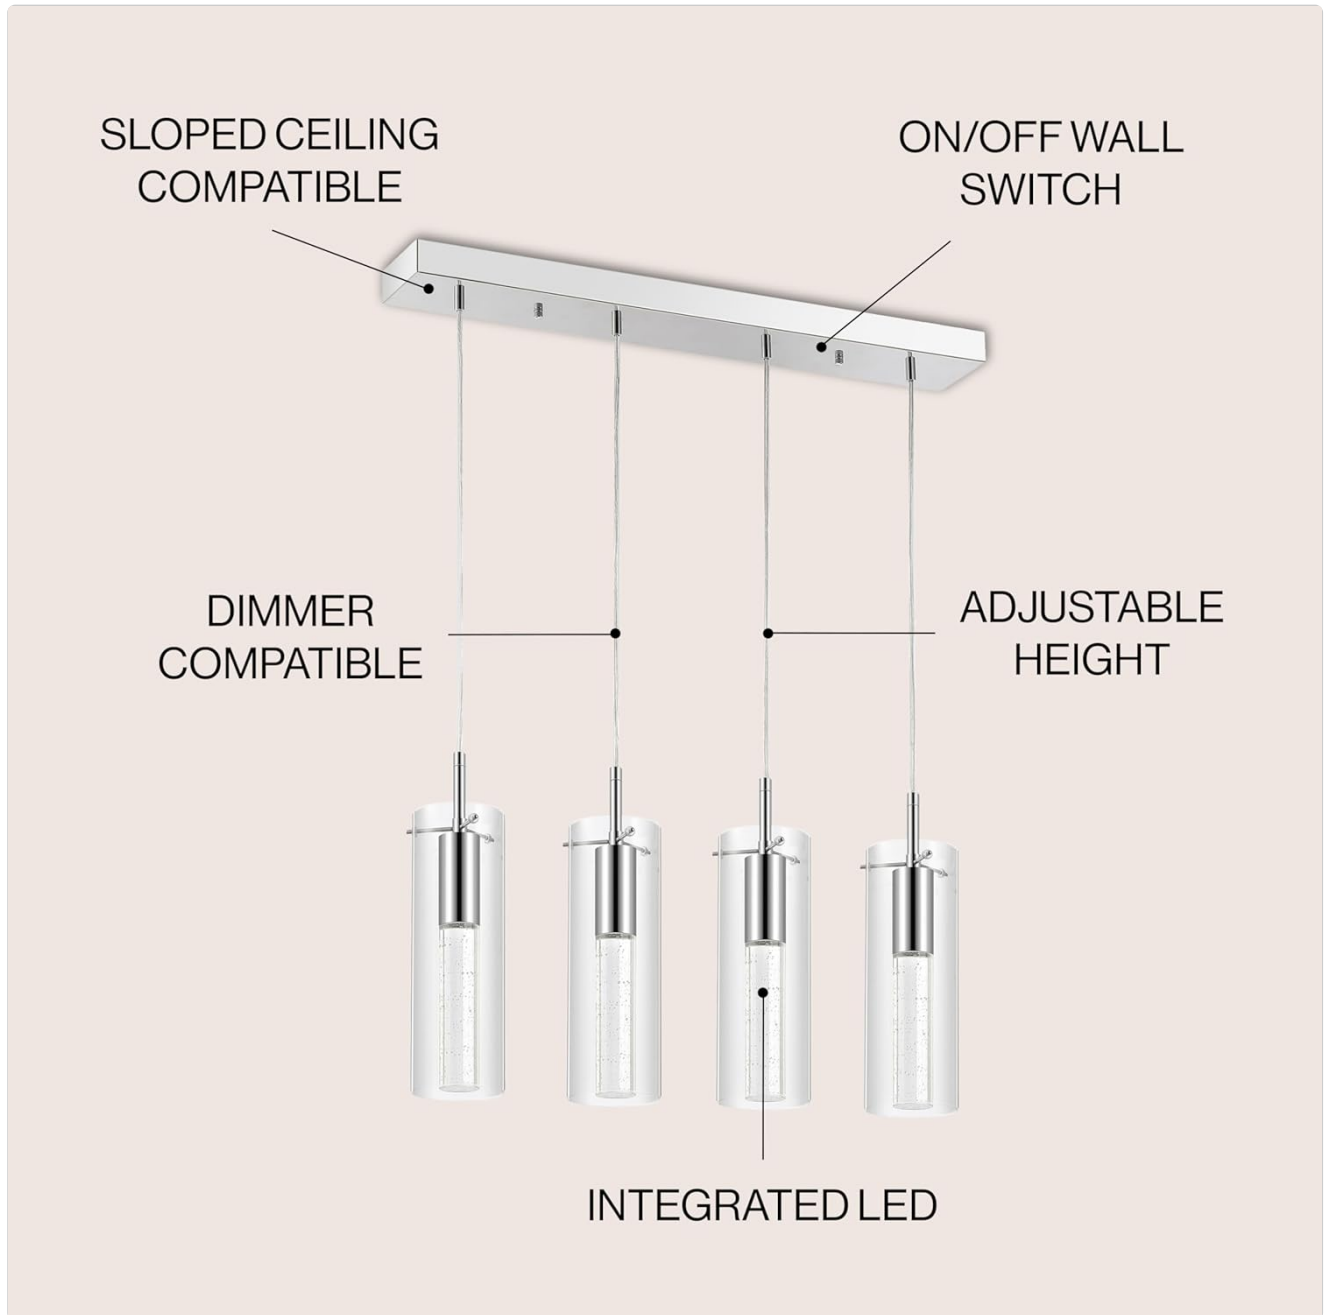


This image illustrates the key features of the JYL1706A pendant light, including its compatibility with sloped ceilings and dimmers, the presence of an on/off wall switch, adjustable height, and integrated LED technology.

## PRODUCT SPECIFICATIONS

Feature	Detail
---------	--------

Feature	Detail
Model Number	JYL1706A
Brand	JONATHAN Y
Dimensions (L x W x H)	29.5"L x 4.25"W x 77"H (Max Adjustable Height)
Weight	16.28 Pounds
Material	Crystal, Glass, Iron, Metal
Finish	Polished Chrome
Light Source	Integrated LED
Number of Lights	4
Wattage	30 Watts
Brightness	771 Lumens
Light Color	Soft White
Voltage	134 Volts
Dimmable	Yes
Adjustable Height	Yes
Mounting Type	Ceiling Mount (Pendant)
Certifications	ETL Listed, UL Standards

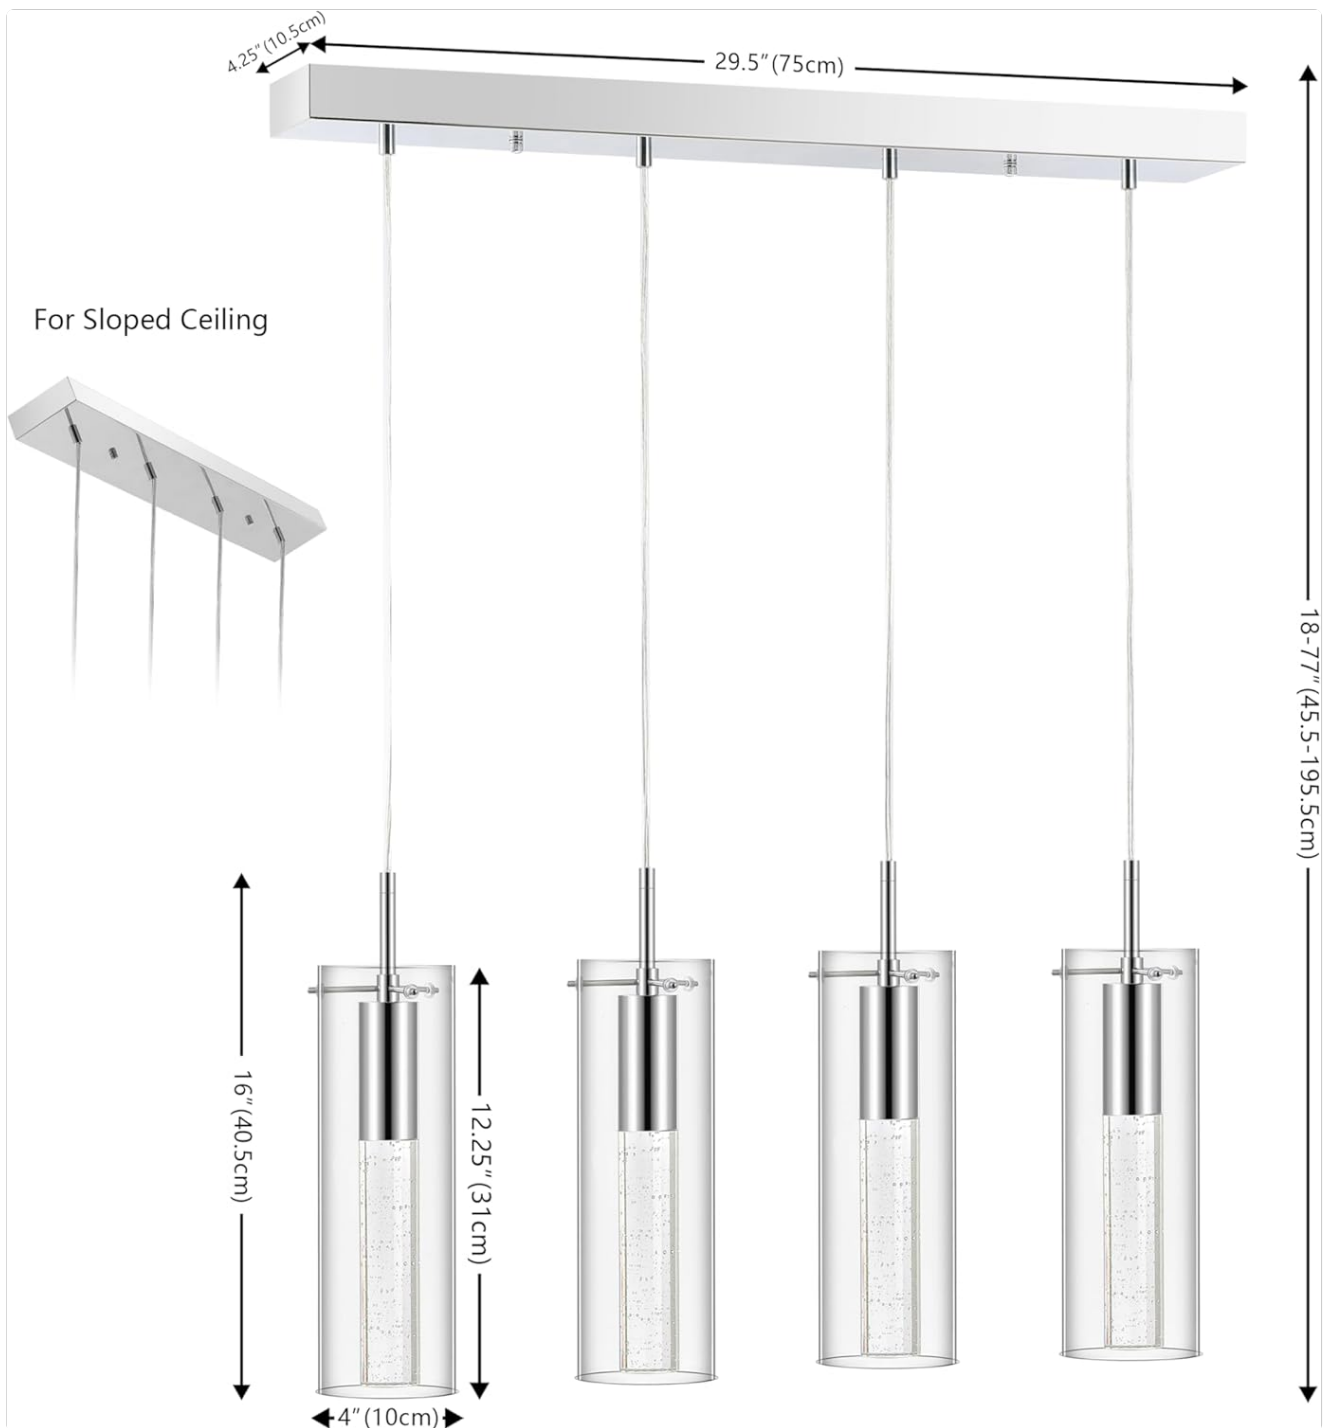

This diagram provides detailed measurements for the JYL1706A pendant light, indicating the overall length of the canopy, the width, and the adjustable range for the hanging height of each light.

## INSTALLATION INSTRUCTIONS

### 1. Preparation:

- Turn off power at the circuit breaker.
- Ensure you have all necessary tools (screwdriver, wire strippers, ladder, etc.) and the package contents listed above.
- If replacing an existing fixture, carefully remove it.

### 2. Mounting the Canopy:

- Attach the mounting bracket to the junction box in your ceiling using the provided screws.
- Connect the fixture's ground wire to the ground wire from the junction box (usually bare copper or green).
- Connect the fixture's white wire to the white (neutral) wire from the junction box.

- Connect the fixture's black wire to the black (hot) wire from the junction box.
- Secure all wire connections with wire nuts.
- Carefully tuck all wires into the junction box.
- Attach the fixture canopy to the mounting bracket, securing it with the provided screws.

### 3. Adjusting Height:

- The hanging height of each pendant can be adjusted by pressing the small pin on the canopy where the cable enters and sliding the cable to the desired length.
- Ensure all pendants are at the desired height before finalizing.

### 4. Attaching Glass Shades:

- Carefully attach each clear glass shade to its respective pendant light.

### 5. Final Step:

- Restore power at the circuit breaker.
- Test the light fixture.



This detailed image shows the connection point of the glass shade to the chrome fixture, illustrating how the components fit together during assembly. It also provides a closer look at the bubble glass design.

## OPERATING INSTRUCTIONS

Your JONATHAN Y JYL1706A pendant light is designed for simple operation.

- **Power On/Off:** Use your standard wall switch to turn the light fixture on or off.
- **Dimming Functionality:** This fixture is dimmable. If connected to a compatible dimmer switch (sold separately), you can adjust the light intensity to your preference.



This image visually compares the pendant light at its maximum brightness and a dimmed setting, showcasing the fixture's ability to adjust light intensity when connected to a compatible dimmer switch.

## CARE AND MAINTENANCE

- **Cleaning:** To clean the fixture, ensure the power is off. Wipe with a soft, dry cloth. Do not use abrasive cleaners, polishes, or solvents as they may damage the finish or glass.

- **Bulb Replacement:** This fixture uses integrated LED lighting and does not require bulb replacement. The LEDs have a lifespan of up to 15 years with normal use.
- **Glass Shades:** Handle glass shades with care. Clean with a mild glass cleaner and a soft cloth if necessary.

## TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on	No power to the fixture	Check circuit breaker or fuse. Ensure wall switch is on.
	Loose wire connections	Turn off power, check all wire connections are secure.
Light flickers	Incompatible dimmer switch	Ensure dimmer switch is LED compatible.
	Loose wire connections	Turn off power, check all wire connections are secure.
Pendants are uneven	Cables not adjusted correctly	Adjust the cable length for each pendant using the pin mechanism until desired height is achieved.

## WARRANTY AND SUPPORT

**Manufacturer Warranty:** JONATHAN Y offers a 30-day manufacturer warranty for defects only. Normal wear and tear is not warranted. Visible damages not noted upon delivery will be determined to be customer damage and will not be warranted. All products are inspected upon arrival, and worn, dirty, or stained merchandise will not be accepted for warranty claims.

For warranty information or product support, please contact JONATHAN Y customer service. Refer to your purchase documentation for specific contact details or visit the official JONATHAN Y website.

**Online Resources:** For additional information, tips, and product registration, visit the [JONATHAN Y Store on Amazon](#).

© 2026 JONATHAN Y. All rights reserved.

JONATHAN Y and the JONATHAN Y logo are trademarks of JONATHAN Y.