

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [SIMBAILAI](#) /
- › [SIMBAILAI 7-inch HD Wireless Video Doorbell Instruction Manual](#)

### SIMBAILAI B0CP9SF634

# SIMBAILAI 7-inch HD Wireless Video Doorbell User Manual

MODEL: B0CP9SF634

## 1. INTRODUCTION

Thank you for choosing the SIMBAILAI 7-inch HD Wireless Video Doorbell. This system provides a smart and convenient way to monitor your entrance, communicate with visitors, and enhance your home security. Featuring 1080p HD video, PIR motion detection, and a 160° wide-angle camera, it ensures clear visuals day and night. The 100% wireless design simplifies installation, making it suitable for various environments including homes, offices, and shops.

**Echte Kabellose Video Tuirsprechanlage**  
*Beantworte die Tur in deiner Hand*

PIR    Nachtversion    160°    Aufzeichnen    1080P    TF-card    Lange Übertragung    2.4G

## 2. SAFETY INFORMATION

- Do not expose the outdoor unit to extreme temperatures or direct sunlight for prolonged periods.
- Ensure the outdoor unit is securely mounted to prevent accidental falls.
- The outdoor unit has an IP65 waterproof rating, protecting it from dust and low-pressure water jets. However, avoid submerging it in water.
- Use only the specified charging adapter for the indoor unit.
- Keep the device away from strong magnetic fields or sources of interference.



The outdoor unit is IP65 rated, suitable for outdoor use in various weather conditions.

### 3. PACKAGE CONTENTS

Please check the package contents carefully. If any items are missing or damaged, contact customer support.

- 1 x Outdoor Doorbell Unit
- 1 x 7-inch Indoor Monitor
- 1 x Power Adapter for Indoor Monitor
- 1 x 32GB TF Memory Card (pre-installed or included separately)
- Mounting Screws and Wall Plugs
- User Manual



Main components of the SIMBAILAI doorbell system: outdoor unit, indoor monitor, and a 32GB memory card.

### 4. SETUP

## 4.1. Charging the Outdoor Unit

The outdoor unit is equipped with a 5000mAh lithium battery. Before first use, fully charge the outdoor unit. The standby time can be up to 6 months depending on usage and environment.

- Connect the outdoor unit to a power source using the provided charging cable.
- A charging indicator will show the charging status.



The outdoor unit features a 5000mAh battery for long standby time.



The outdoor unit can be charged via a power adapter or a power bank using its Android port.

## 4.2. Powering the Indoor Monitor

The indoor monitor must be connected to an adapter for power supply. Plug the provided power adapter into the indoor unit and then into a wall outlet.

## 4.3. Installation

The system is 100% wireless, requiring no complex wiring between the doorbell and the monitor. This makes installation straightforward, even for beginners.

- **Outdoor Unit:** Mount the outdoor unit on a wall near your door using the provided screws. Ensure it is placed at an optimal height for clear viewing.
- **Indoor Monitor:** The indoor unit supports both wall-hanging and vertical desktop installation. Choose the most convenient location within signal range. The indoor unit has an antenna; ensure it is open to improve signal reception.

*Note:* Aluminum doors, Wi-Fi interference, and other environmental factors may reduce the effective operating distance between the two units.



2C


4C



# True wireless

No wiring required

No setup required

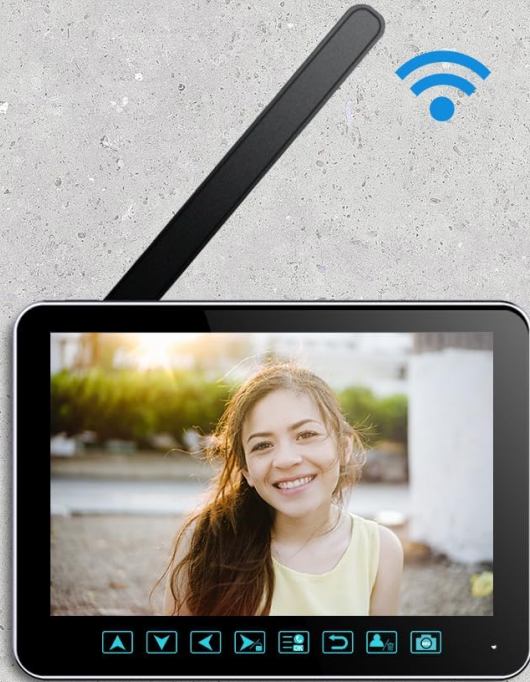

The system is truly wireless, requiring no complex wiring for installation.



Emphasizing the 100% wireless nature of the doorbell system, showing no wiring is needed.

#### 4.4. Memory Card Installation

The product comes with a 32GB memory card. The indoor unit supports up to 128GB TF memory cards for storing recordings and snapshots.

- Locate the TF card slot on the indoor monitor.
- Insert the memory card into the slot until it clicks into place.

### 5. OPERATING INSTRUCTIONS

#### 5.1. Answering a Call

When a visitor presses the doorbell button on the outdoor unit, the indoor monitor will ring and display the visitor's video. You can then:

- **View:** The screen automatically displays the live feed.
- **Talk:** Press the talk button on the indoor monitor to engage in two-way audio communication with the visitor.
- **Unlock:** If connected to an electronic lock, you can remotely open the door from the indoor monitor.

#### 5.2. Motion Detection (PIR)

The outdoor unit features a PIR (Passive Infrared) motion sensor. When motion is detected within its 1600 wide-angle view, it will automatically capture images or record video and send an alarm notification to the indoor monitor.

## Intelligente PIR-Bewegungserkennung

*Sobald eine Bewegung erkannt wird, wird eine Alarmerinnerung an den Innenmonitor gesendet*



The system features intelligent PIR motion detection, sending alerts to the indoor monitor upon detecting movement.

### 5.3. Night Vision

The outdoor unit is equipped with infrared LEDs for clear night vision, ensuring visibility even in low-light or dark conditions.



The 1080P HD camera provides clear images both during the day and at night with its night vision capabilities.

#### 5.4. Video Recording and Playback

The system supports automatic snapshot capture and video recording when motion is detected or the doorbell is pressed. You can also manually record or take snapshots.

- **Recording:** Recordings are saved to the installed TF memory card.
- **Playback:** Access recorded videos and snapshots directly from the indoor monitor for review.

#### 5.5. 1600 Wide-Angle Camera

The outdoor unit features a high-quality camera with a 1600 wide-angle lens, providing a broader view of your entrance area.

# 160° Wide-Angle View



The outdoor unit offers a 160-degree wide-angle view, capturing a broader area.

## 5.6. Multiple Intercoms Conversation

The system supports multiple indoor monitors, allowing family members in different rooms to communicate with visitors or each other.

# Multiple Intercoms Conversation

Talk with your family in different room



Diagram illustrating how multiple indoor monitors can be used for intercom conversations within the home.

## 6. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the outdoor unit and indoor monitor. Do not use abrasive cleaners or solvents.
- **Battery Care:** For optimal battery life of the outdoor unit, avoid fully discharging it frequently. Recharge it when the battery level is low.
- **Firmware Updates:** Check the manufacturer's website periodically for any available firmware updates to ensure optimal performance and security.

## 7. TROUBLESHOOTING

Problem	Possible Cause	Solution
No signal between outdoor and indoor units.	Too far apart; interference from aluminum doors, Wi-Fi, etc.; indoor unit antenna not open.	Reduce distance between units; check for sources of interference; ensure indoor unit antenna is open.
Outdoor unit battery drains quickly.	Frequent motion detection events; extreme temperatures; aging battery.	Adjust motion detection sensitivity; ensure optimal operating temperature; contact support if battery life significantly degrades.
Indoor monitor not turning on.	Power adapter not connected or faulty; power outlet issue.	Ensure power adapter is securely connected and plugged into a working outlet.
Cannot record or save snapshots.	Memory card full or faulty; memory card not inserted correctly.	Check memory card status; reinsert or replace memory card; ensure it's formatted correctly.

## 8. SPECIFICATIONS



Dimensions of the outdoor unit and indoor monitor.

Feature	Specification
Brand	SIMBAILAI
Model	B0CP9SF634
Mounting Type	Wall Mount
Color	Wireless+HD
Wireless Communication Technology	WLAN (Wi-Fi)
Viewing Angle	160 Degrees
Material	Plastic, Metal
Voltage	5 Volts
Wattage	1 Watt

Feature	Specification
Item Dimensions (L x W x H)	22.5 x 1.2 x 12.3 cm
Product Dimensions	22.5 x 1.2 x 12.3 cm; 1.2 Kilograms
Batteries	2 Lithium-Ion batteries required (included)
Battery Type	Lithium-Ion
Item Weight	1.2 Kilograms
Recommended Uses	Motion Detection, Night Vision
Outdoor Unit Battery Capacity	5000mAh
Indoor Monitor Screen Resolution	1280*800
Max. TF Card Support	128GB
Waterproof Rating	IP65

## 9. WARRANTY AND SUPPORT

SIMBAILAI products are designed for reliability and performance. For any technical assistance, warranty claims, or product inquiries, please contact our customer support team through the retailer's platform or the official SIMBAILAI website.

All SIMBAILAI products are CE, FCC, and ROHS certified, ensuring compliance with international safety and environmental standards. Our products also comply with EU-DSGVO (GDPR) for enhanced data protection and privacy.