

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [ATUMTEK](#) /

› [ATUMTEK ATYK179 Wireless Bluetooth Camera Remote Shutter User Manual](#)

ATUMTEK ATYK179

ATUMTEK ATYK179 Wireless Bluetooth Camera Remote Shutter User Manual

Model: ATYK179

1. INTRODUCTION

Thank you for choosing the ATUMTEK Wireless Bluetooth Camera Remote Shutter. This device allows you to remotely control your smartphone's camera for taking photos and videos, providing convenience for selfies, group shots, and stable long-exposure photography. This manual provides detailed instructions for setup, operation, and maintenance.



Image: Two ATUMTEK wireless Bluetooth camera remote shutters in white, with wrist straps.

Key Features:

- **Advanced Bluetooth 5.2 Technology:** Ensures a stable and fast connection up to 10 meters (33 feet).
- **Extended Compatibility:** Works with most iOS (iPhone) and Android smartphones.
- **Long-Life Button Battery:** Powered by a CR2032 battery (210mAh), capable of capturing over 20,000 photos.
- **Compact and Portable Design:** Small dimensions (48.5mm x 33.7mm x 12.5mm) and lightweight (14g) for easy carrying.
- **Detachable Wrist Strap:** Provides added security and prevents loss.

2. SETUP

2.1 Unboxing

Upon opening the package, ensure all components are present:

- ATUMTEK Wireless Bluetooth Camera Remote Shutter (2 units)
- Wrist Straps (2 units)

- User Manual



Image: The ATUMTEK product box and its contents: two white remote shutters, two wrist straps, and a user manual.

Video: An unboxing and overview of the ATUMTEK Bluetooth Camera Remote Shutter, demonstrating its features and compact design.

2.2 Battery Installation

The remote shutter comes with a pre-installed CR2032 button battery. If replacement is needed, follow these steps:

1. Locate the battery compartment on the back of the remote.
2. Use a small tool or coin to gently open the compartment.
3. Insert a new CR2032 battery with the positive (+) side facing up.
4. Close the battery compartment securely.

Package Includes



Image: Close-up of a CR2032 lithium battery, which powers the remote shutter.

3. OPERATING INSTRUCTIONS

3.1 Power On/Off

- To turn **ON**: Slide the power switch on the side of the remote to the 'ON' position. The blue LED indicator will flash.
- To turn **OFF**: Slide the power switch to the 'OFF' position.

3.2 Bluetooth Pairing

Follow these steps to pair your ATUMTEK remote shutter with your smartphone:

1. Ensure the remote shutter is turned **ON**. The blue LED will rapidly flash for 7 seconds, then enter a slow flash state, indicating it's in pairing mode.
2. On your smartphone, go to **Settings** and enable **Bluetooth**.
3. Look for "ATUMTEK" in the list of available devices.
4. Tap on "ATUMTEK" to connect. If prompted, select "Pair".

5. Once successfully paired, the blue LED on the remote will turn off.

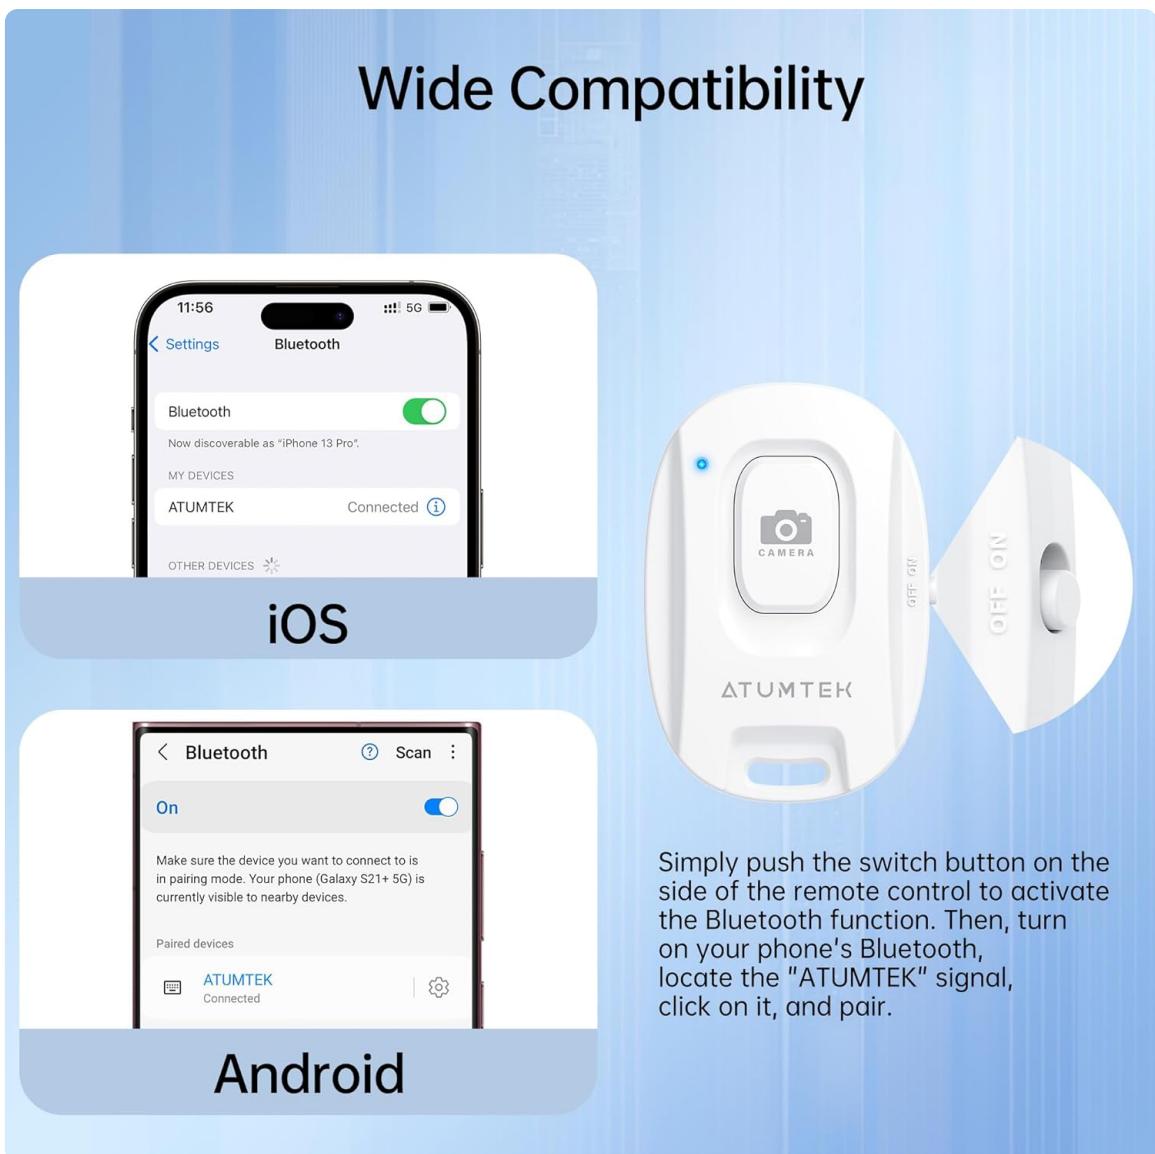


Image: Bluetooth pairing instructions for iOS and Android devices.

Video: Detailed instructions on how to pair the ATUMTEK remote shutter with iOS and Android devices, and how to use its functions for photos and videos.

3.3 Taking Photos and Videos

1. Open your smartphone's camera application.
2. Ensure the camera app is in the desired mode (Photo or Video).
3. Press the **CAMERA** button on the remote shutter once to take a photo or start/stop video recording.

3.4 LED Indicator Status

- **Rapid Flashing (7 seconds after power on):** Initial pairing mode.
- **Slow Flashing:** Standby state, ready for pairing.
- **Off (after pairing):** Successfully connected to a device.
- **Off (after 5 minutes of no operation):** Enters sleep mode to conserve battery.
- **Brief Light-up (when pressing button in sleep mode):** Remote is waking up and re-entering pairing mode.
- **Low Battery:** The LED will turn off, and the connection may be lost. Replace the battery.

4. MAINTENANCE

4.1 Battery Replacement

The remote uses a CR2032 button battery. When the battery is low or depleted, replace it as described in Section 2.2. A fresh battery can last for over 20,000 photos.

4.2 Cleaning

To clean the remote shutter, use a soft, dry cloth. Avoid using harsh chemicals or abrasive materials, as these may damage the device.

5. TROUBLESHOOTING

5.1 Remote Not Pairing

- **Check Power:** Ensure the remote is turned ON.
- **Check Bluetooth on Phone:** Verify that Bluetooth is enabled on your smartphone.
- **Battery Level:** A low battery can prevent successful pairing. Replace the CR2032 battery if necessary.
- **Distance:** Ensure the remote is within 10 meters (33 feet) of your smartphone.
- **Interference:** Move away from other Bluetooth devices or strong electromagnetic fields.

5.2 Remote Not Taking Photos/Videos

- **Camera App Open:** The remote only functions when your smartphone's camera application is open and active.
- **Android Specific Setting:** For some Android devices (e.g., Samsung Galaxy S25 Ultra), you may need to adjust a camera setting. Go to **Camera app > Quick controls icon (four small dots) > Settings icon > Shooting methods > Press Volume buttons to > Choose "Take pictures or record video".**
- **Battery Level:** Ensure the battery is not depleted.

6. SPECIFICATIONS

Model Number	ATYK179
Product Dimensions	48.5mm x 33.7mm x 12.5mm (1.89 x 1.18 x 0.39 inches)

Item Weight	1.41 ounces (approx. 40g)
Bluetooth Version	5.2
Wireless Range	Up to 10 meters (33 feet)
Battery Type	CR2032 Lithium Button Battery (included)
Battery Capacity	210mAh
Battery Life	Over 20,000 photos
Compatible Devices	Most iOS (iPhone, iPad) and Android smartphones/tablets

7. WARRANTY AND SUPPORT

7.1 Warranty Information

ATUMTEK offers a warranty for all its branded products when purchased through authorized channels. Please retain your proof of purchase for warranty claims.

7.2 Customer Support

For further assistance, troubleshooting, or to provide feedback, please visit the official ATUMTEK store or contact customer service through the platform where you purchased the product.

Official ATUMTEK Store: [ATUMTEK Store on Amazon](#)