

DICTAC DJ503281

DICTAC LED Bathroom Mirror Cabinet Instruction Manual

Model: DJ503281

[Introduction](#)
[Instructions](#)[Safety Information](#)
[Maintenance](#)[Package Contents](#)
[Troubleshooting](#)[Setup & Installation](#)
[Specifications](#)[Operating](#)
[Warranty & Support](#)

1. INTRODUCTION

This manual provides comprehensive instructions for the installation, operation, and maintenance of your DICTAC LED Bathroom Mirror Cabinet, model DJ503281. This wall-mounted cabinet features integrated LED lighting with adjustable color temperature and brightness, a convenient internal power outlet, and practical storage with adjustable shelves. Please read this manual thoroughly before installation and use to ensure safe and optimal performance.

2. SAFETY INFORMATION

WARNING: This product contains sharp edges. Handle with extreme care during installation and use to prevent injury.

- Keep the product away from direct water spray and excessive heat sources.
- Always disconnect the power supply before cleaning or performing any maintenance on electrical components.
- Do not attempt to repair or modify any electrical components yourself. Consult a qualified electrician for any electrical issues or modifications.
- Ensure the installation surface is structurally sound and capable of supporting the cabinet's weight (12.5 kg plus contents).
- All electrical connections must comply with local building and electrical codes.

3. PACKAGE CONTENTS

Please check the package contents against the list below. If any items are missing or damaged, contact customer support immediately.

- DICTAC LED Bathroom Mirror Cabinet (Model DJ503281)
- Adjustable Glass Shelves (Quantity: 2)

- Mounting Hardware (Screws, wall anchors, etc.)
- Power Adapter/Cable with Male Plug
- Instruction Manual



Image: Front view of the DICTAC LED Bathroom Mirror Cabinet.

4. SETUP AND INSTALLATION

The DICTAC LED Bathroom Mirror Cabinet is designed for wall-mounted installation. All necessary accessories and illustrated instructions are included to facilitate assembly.

4.1 Pre-Installation Checklist

- Verify all package contents are present and undamaged.
- Ensure the wall is suitable for mounting and can support the cabinet's weight.
- Have necessary tools ready (e.g., drill, screwdriver, level, measuring tape).

- Turn off the main power supply to the installation area before beginning any electrical work.

4.2 Mounting the Cabinet

1. **Measure and Mark:** Determine the desired mounting height. Use a level to mark the positions for drilling holes according to the cabinet's mounting points.
2. **Drill Holes:** Drill holes at the marked positions. Insert appropriate wall anchors if necessary (e.g., for drywall).
3. **Secure Mounting Plate (if applicable):** Attach any mounting plates or brackets to the wall using the provided screws.
4. **Hang the Cabinet:** Carefully lift and hang the cabinet onto the mounting hardware. Ensure it is securely fastened and level.
5. **Electrical Connection:** Connect the cabinet's power cable to a suitable electrical outlet. The cabinet includes a male plug for standard wall sockets. If direct wiring is required, consult a qualified electrician.
6. **Install Shelves:** Insert the adjustable glass shelves into the desired positions inside the cabinet.

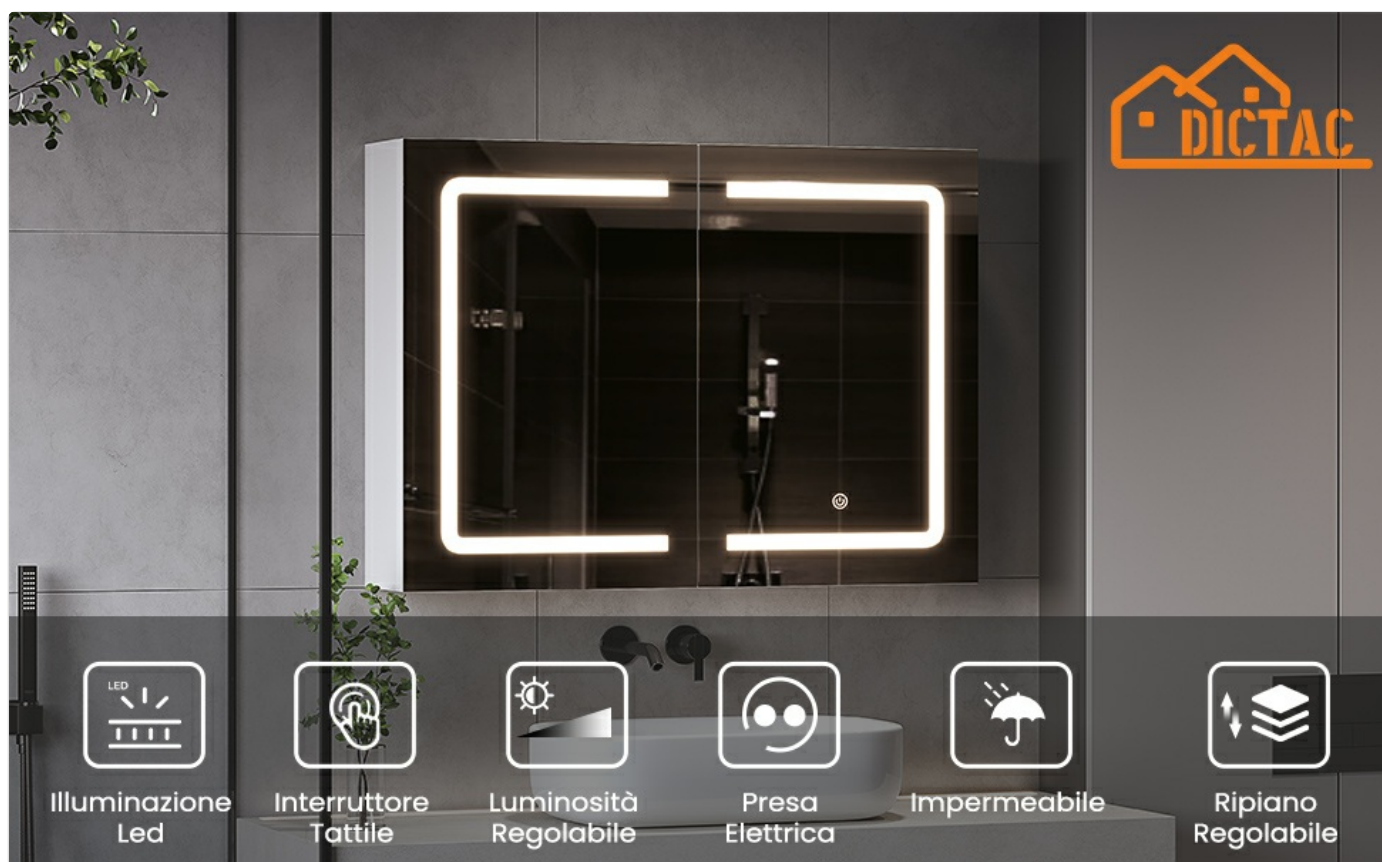


Image: Product dimensions (Width: 80cm, Height: 60cm, Depth: 16cm).



Image: Interior view with adjustable shelves for flexible storage.

5. OPERATING INSTRUCTIONS

5.1 LED Lighting Control

The mirror cabinet features integrated LED lighting with a touch sensor switch located on the mirror surface.

- **Power On/Off:** Briefly touch the blue illuminated button on the mirror to turn the LED lights on or off. The blue light indicates the button's location, even in the dark.
- **Change Light Color:** With the lights on, a short press on the touch switch will cycle through three light color modes:
 - Warm Light (3000K)
 - Natural Light (4500K)
 - Cool White Light (6400K)
- **Adjust Brightness:** With the lights on, press and hold the touch switch to continuously adjust the brightness level. Release the button when the desired brightness is reached. The cabinet features a memory function that retains the last brightness setting.

Mobile a Specchio Bagno con Presa di Ricarica

- Eingang: 220-240V-50HZ
- Ausgang: 220-240 V



·Può caricare il rasoio, lo spazzolino elettrico o utilizzare un asciugacapelli
·La presa si trova dietro la porta per impedire l'ingresso di acqua

Image: Touch switch functionality for light color and brightness adjustment.

5.2 Internal Power Outlet

An internal power outlet is located in the bottom right corner inside the cabinet. This outlet is designed for convenience and safety.

- **Usage:** Use this outlet to charge electric razors, toothbrushes, or power small appliances like hair dryers.
- **Main Switch:** A main switch inside the cabinet controls the power supply to both the internal outlet and the LED lighting. Ensure this switch is ON for the lights and outlet to function.
- **Safety:** For safety, it is recommended to turn off the main switch when the internal power outlet is not in use. The outlet's placement helps prevent water entry.





Pannello MDF di Alta Qualità



Cerniere in Acciaio Inossidabile



Con Spina



Maniglie delle Porte Nascoste e Pratiche



Impermeabile e Resistente all'umidità

Armadietto a Specchio da Bagno di Alta Qualità: Dettagli ben Realizzati

Image: Internal power outlet and main switch for electrical devices.

6. MAINTENANCE

Regular cleaning and proper care will ensure the longevity and appearance of your mirror cabinet.

- **Cleaning the Mirror:** Use a soft, lint-free cloth and a non-abrasive glass cleaner. Spray the cleaner onto the cloth, not directly onto the mirror, to avoid liquid seeping into the edges.
- **Cleaning the Cabinet:** Wipe the cabinet surfaces with a soft, damp cloth. For stubborn stains, use a mild, non-abrasive cleaner. Dry immediately with a clean cloth.
- **Electrical Components:** Always ensure the power is OFF before cleaning any electrical parts. Use a dry cloth for cleaning around the power outlet and LED components.
- **Avoid:** Do not use abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the finish and mirror surface.
- **Hinges:** Periodically check the stainless steel hinges for smooth operation. Lubricate if necessary with a silicone-based lubricant.

Image: High-quality MDF panel and moisture-resistant finish for durability.

7. TROUBLESHOOTING

If you encounter any issues with your DICTAC LED Bathroom Mirror Cabinet, refer to the following troubleshooting guide.

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
LED lights do not turn on.	No power supply. Main switch inside cabinet is OFF. Faulty touch switch.	Check if the cabinet is properly plugged into a live outlet. Ensure the main power switch inside the cabinet is ON. Contact customer support if the touch switch is unresponsive after checking power.
Internal power outlet is not working.	Main switch inside cabinet is OFF. No power supply to the cabinet.	Ensure the main power switch inside the cabinet is ON. Verify the cabinet is plugged into a functional wall outlet.
Light brightness or color cannot be adjusted.	Incorrect operation of touch switch. Faulty LED driver or touch switch.	Refer to Section 5.1 for correct touch switch operation (short press for color, long press for brightness). If problem persists, contact customer support.
Doors are misaligned or do not close properly.	Hinges need adjustment. Cabinet not mounted level.	Adjust the stainless steel hinges using a screwdriver. Check if the cabinet is mounted level using a spirit level.

8. SPECIFICATIONS

Feature	Detail
Brand	DICTAC
Model	DJ503281
Color	White
Product Dimensions (W x H x D)	80 x 60 x 16 cm
Item Weight	12.5 kg
Material	Engineered Wood (MDF E1 class), Glass
Max Load Capacity (per shelf)	10 kg
LED Lighting	Integrated, Dimmable, 3 Color Temperatures (3000K, 4500K, 6400K)
Control	Touch Sensor Switch with Memory Function
Power Outlet	Internal, with Main Switch
Doors	2 Glass Doors with Stainless Steel Hinges
Special Features	Moisture and Mold Resistant Finish, Hidden Door Handles



Image: Energy Label for Model DJ503281. For more details, visit [EPREL Database](#).

9. WARRANTY AND SUPPORT

DICTAC products are manufactured with high-quality materials and undergo strict quality control.

- **Warranty:** Please refer to your purchase documentation for specific warranty terms and conditions.
- **Customer Support:** If you have any questions, require assistance with installation, or encounter any issues not covered in this manual, please contact DICTAC customer support. Contact information can typically be found on your purchase receipt or the seller's page.
- **Returns:** The product is packaged in reinforced cardboard to ensure safe delivery. If the product arrives damaged, please contact the seller immediately for assistance.

© 2024 DICTAC. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question