**Saved from manuals.plus.**
**Open the live page for links to other documents and user manuals.**



**ARZOPA A1**

# ARZOPA Portable Monitor A1 User Manual

Model: A1 | 15.6" FHD 1080P Ultra-Slim

## 1. Introduction

Thank you for choosing the ARZOPA Portable Monitor A1. This manual provides essential information for setting up, operating, maintaining, and troubleshooting your new portable display. Please read this manual thoroughly before use to ensure optimal performance and longevity of your device.
The ARZOPA A1 is a 15.6-inch Full HD (1920x1080) IPS display designed for enhanced productivity and entertainment on the go. Its ultra-slim profile and versatile connectivity make it an ideal companion for laptops, smartphones, gaming consoles, and other compatible devices.

## 2. Key Features

- **Full HD 1080P IPS Screen:** Experience vivid and accurate visuals with a 1920 x 1080 resolution IPS panel, offering a wide 178° viewing angle.
- **Eye Care Technology:** Features effectively reduce blue light radiation and flickering, promoting comfortable viewing during extended use.
- **Integrated Kickstand:** The durable metal kickstand allows for easy adjustment to your preferred viewing angle.
- **Multiple Display Modes:** Supports duplicate, extend, and second screen modes for various applications.
- **Ultra-Slim and Lightweight Design:** Weighing only 1.6 lbs and with a thickness of 0.35 inches, it is designed for portability.
- **Wide Compatibility:** Plug-and-play functionality with laptops, PCs, Macs, phones, Xbox, PS3, PS4, PS5, and Nintendo Switch via USB-C and HDMI.
- **Built-in Speakers:** Integrated dual speakers provide audio output.

## 3. Setup Guide

### 3.1 Package Contents

Please ensure all items are present:

- ARZOPA Portable Monitor A1
- USB-C to USB-C Cable

- USB-A to USB-C Cable
- Mini HDMI to HDMI Cable
- Power Adapter (if included)

## 3.2 Physical Setup

Unfold the integrated kickstand on the back of the monitor to position it at your desired viewing angle. The stand is designed to be stable on flat surfaces.

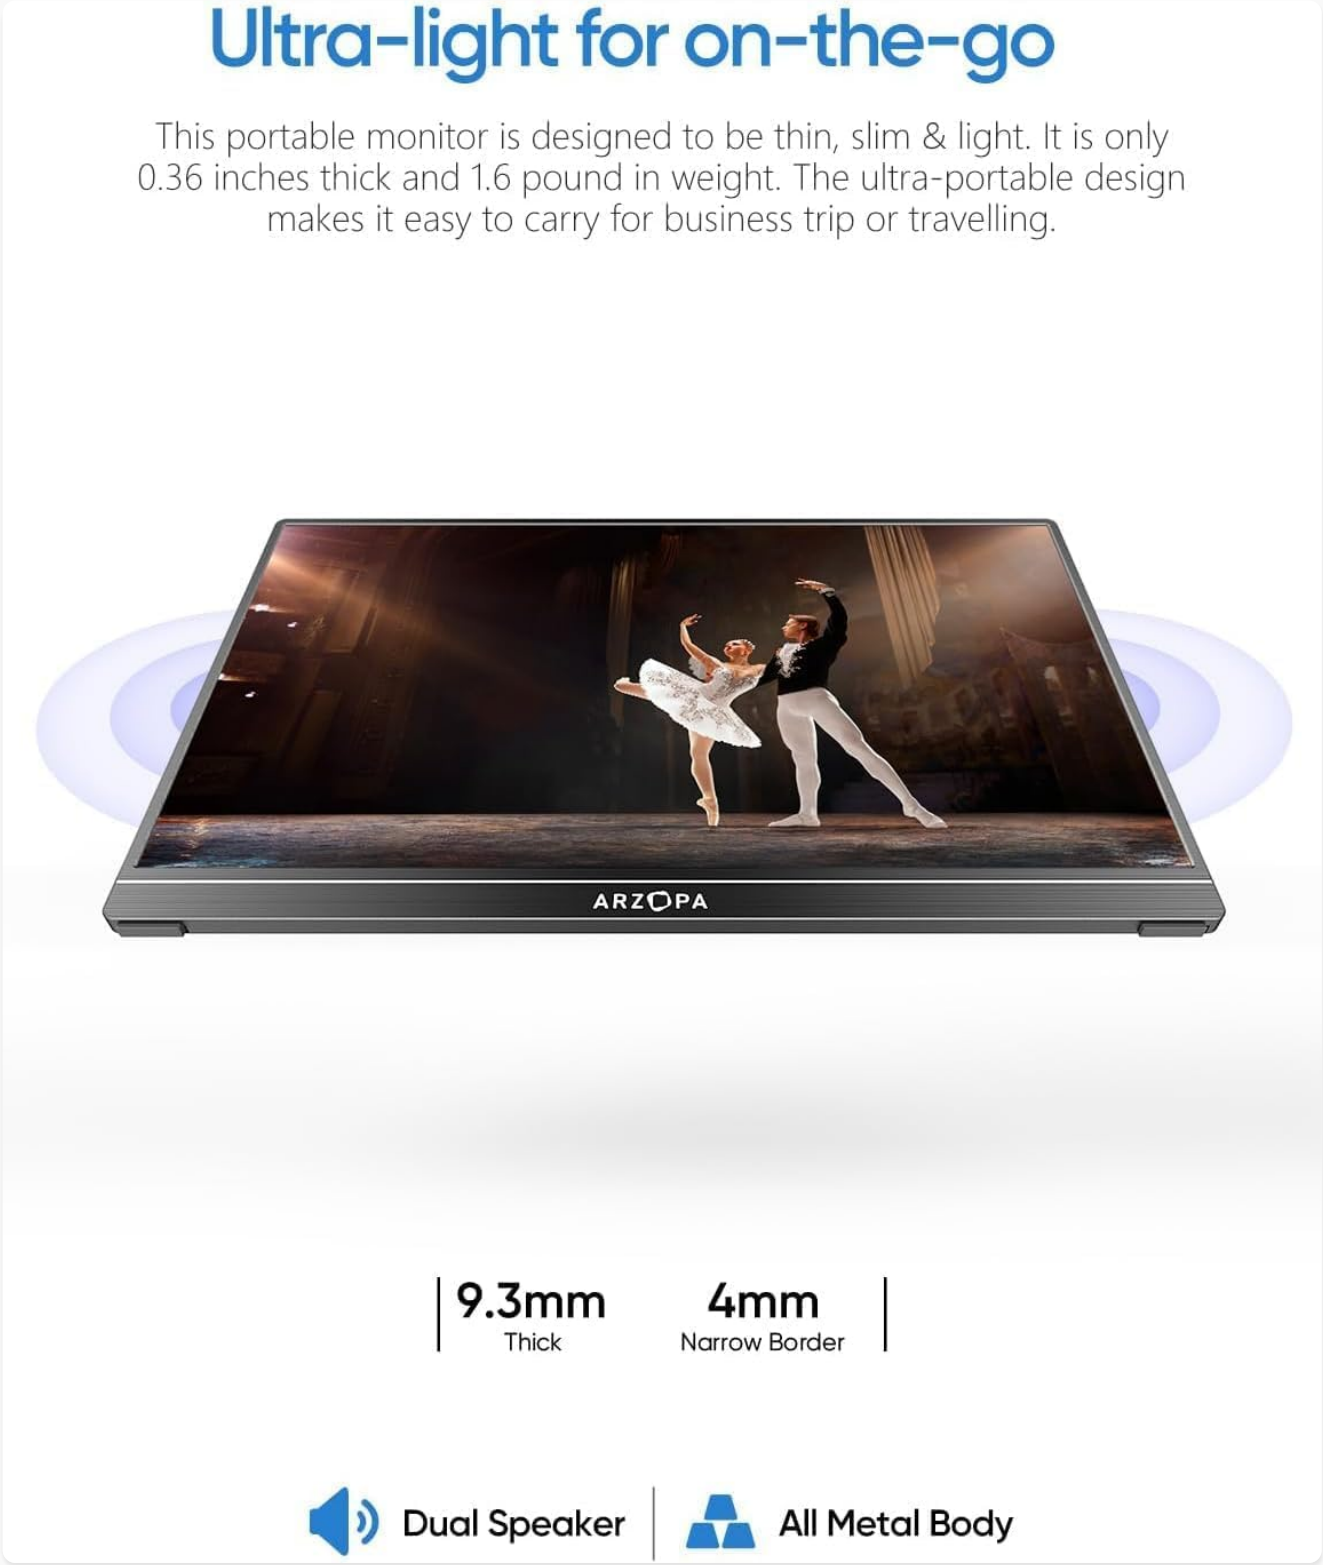



Image: The ARZOPA Portable Monitor A1 positioned with its integrated kickstand, demonstrating its adjustable viewing angle.

## 3.3 Connecting to Devices

The ARZOPA A1 monitor supports various connection methods. Choose the appropriate cable based on your device's available ports.

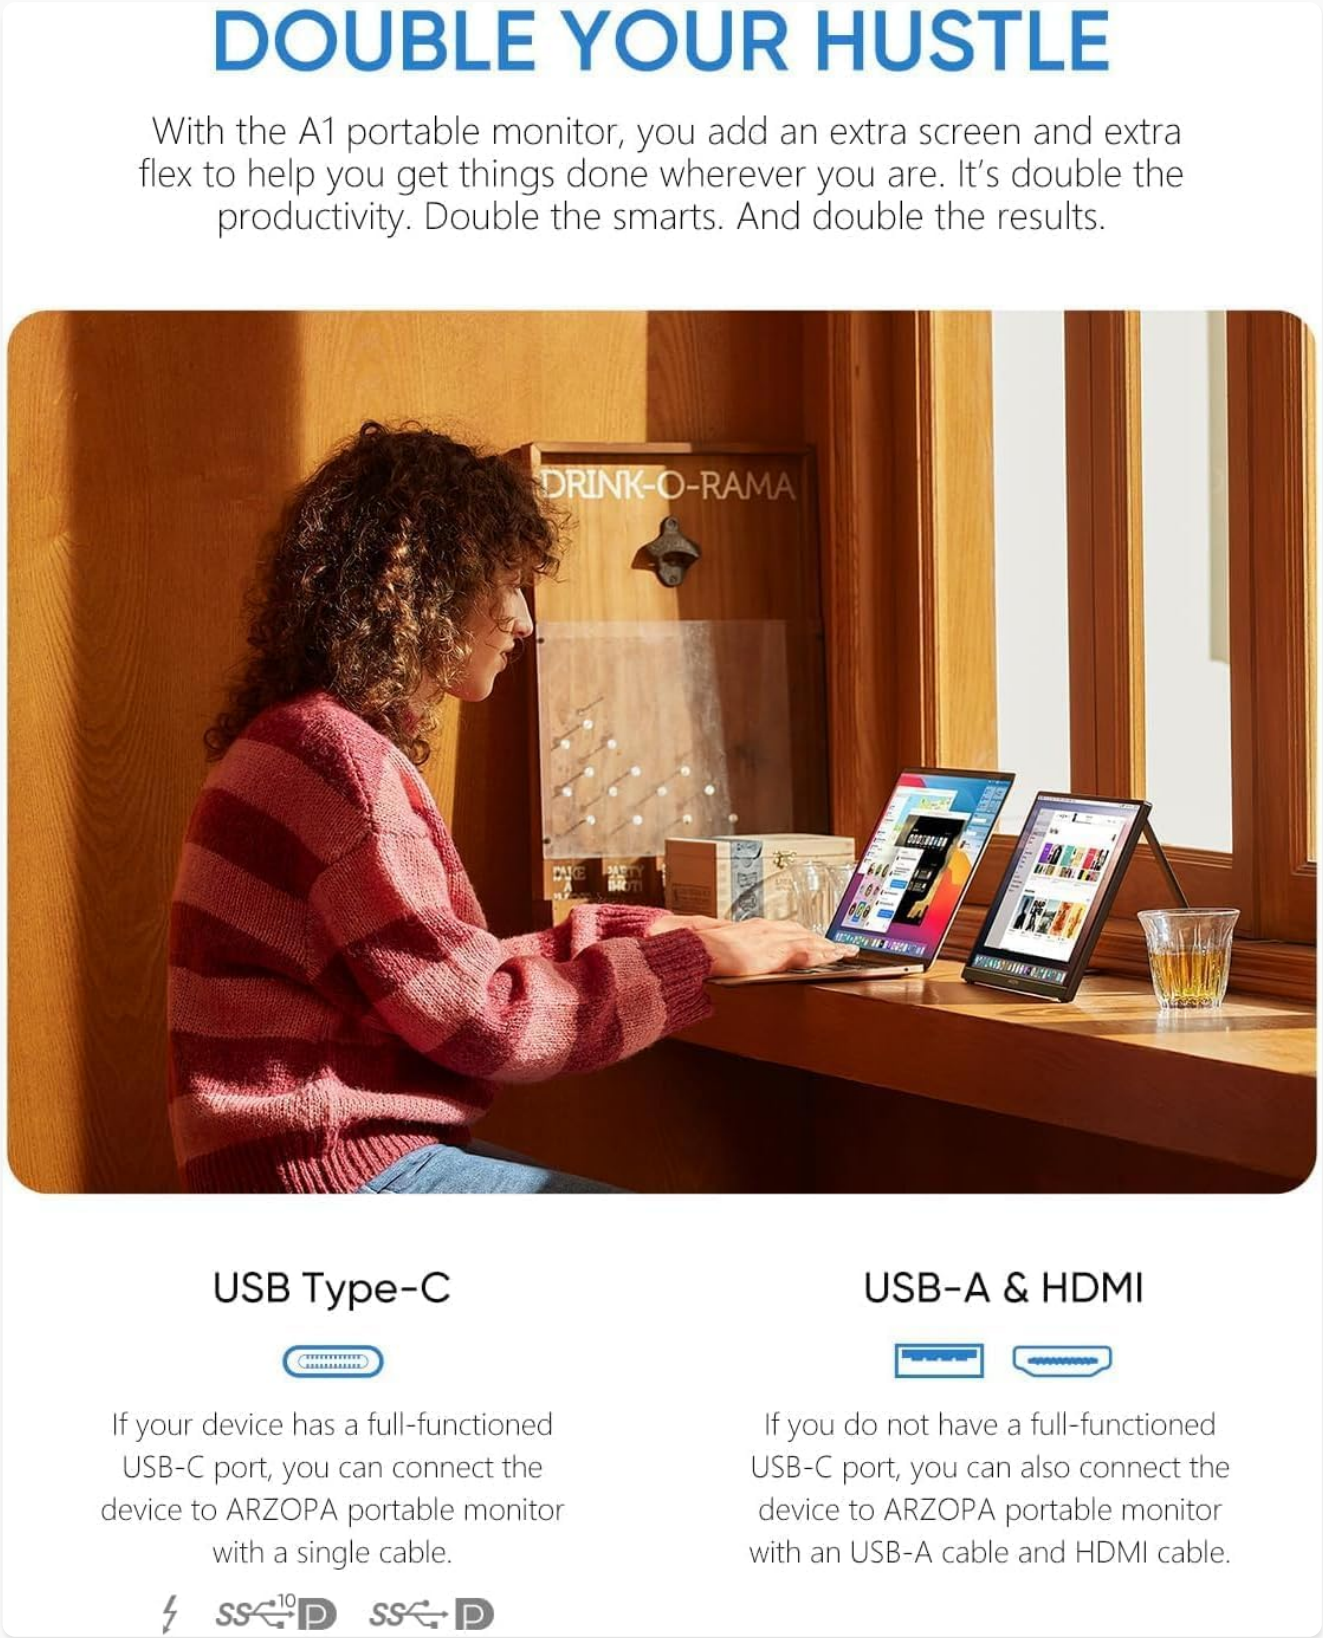



Image: A person using the ARZOPA Portable Monitor A1 alongside a laptop, illustrating its use as a secondary display. The image highlights USB Type-C and USB-A & HDMI connection options.

### USB Type-C Connection (Full-Featured)

If your device (laptop, smartphone) has a full-featured USB-C port that supports both video output and power delivery, you can connect the monitor with a single USB-C to USB-C cable. This cable will provide both power and video signal.

1. Connect one end of the USB-C to USB-C cable to the full-featured USB-C port on your device.
2. Connect the other end of the USB-C to USB-C cable to one of the USB-C ports on the ARZOPA A1 monitor.
3. The monitor should automatically detect the signal and power on.

### HDMI and USB-A Connection

If your device does not have a full-featured USB-C port, or if you prefer to use HDMI, you will need two cables:

1. Connect one end of the Mini HDMI to HDMI cable to the Mini HDMI port on the ARZOPA A1 monitor.
2. Connect the other end of the Mini HDMI to HDMI cable to the HDMI port on your device.
3. Connect one end of the USB-A to USB-C cable to a USB-A port on your device (for power).
4. Connect the USB-C end of the USB-A to USB-C cable to one of the USB-C ports on the ARZOPA A1 monitor (for power).
5. The monitor should power on and display the video signal.

### Power Supply

In some cases, especially when using HDMI or if your device's USB-C port does not provide sufficient power, you may need to connect an external power adapter (not always included, check package contents) to one of the monitor's USB-C ports for stable operation.

Your browser does not support the video tag.

Video: An official product video demonstrating the setup and various uses of the ARZOPA Portable Monitor A1, including connections to different devices and its portability.

## 4. Operating Instructions

### 4.1 Port Overview and OSD Controls

The monitor features several ports and control buttons on its side for easy access and adjustment.

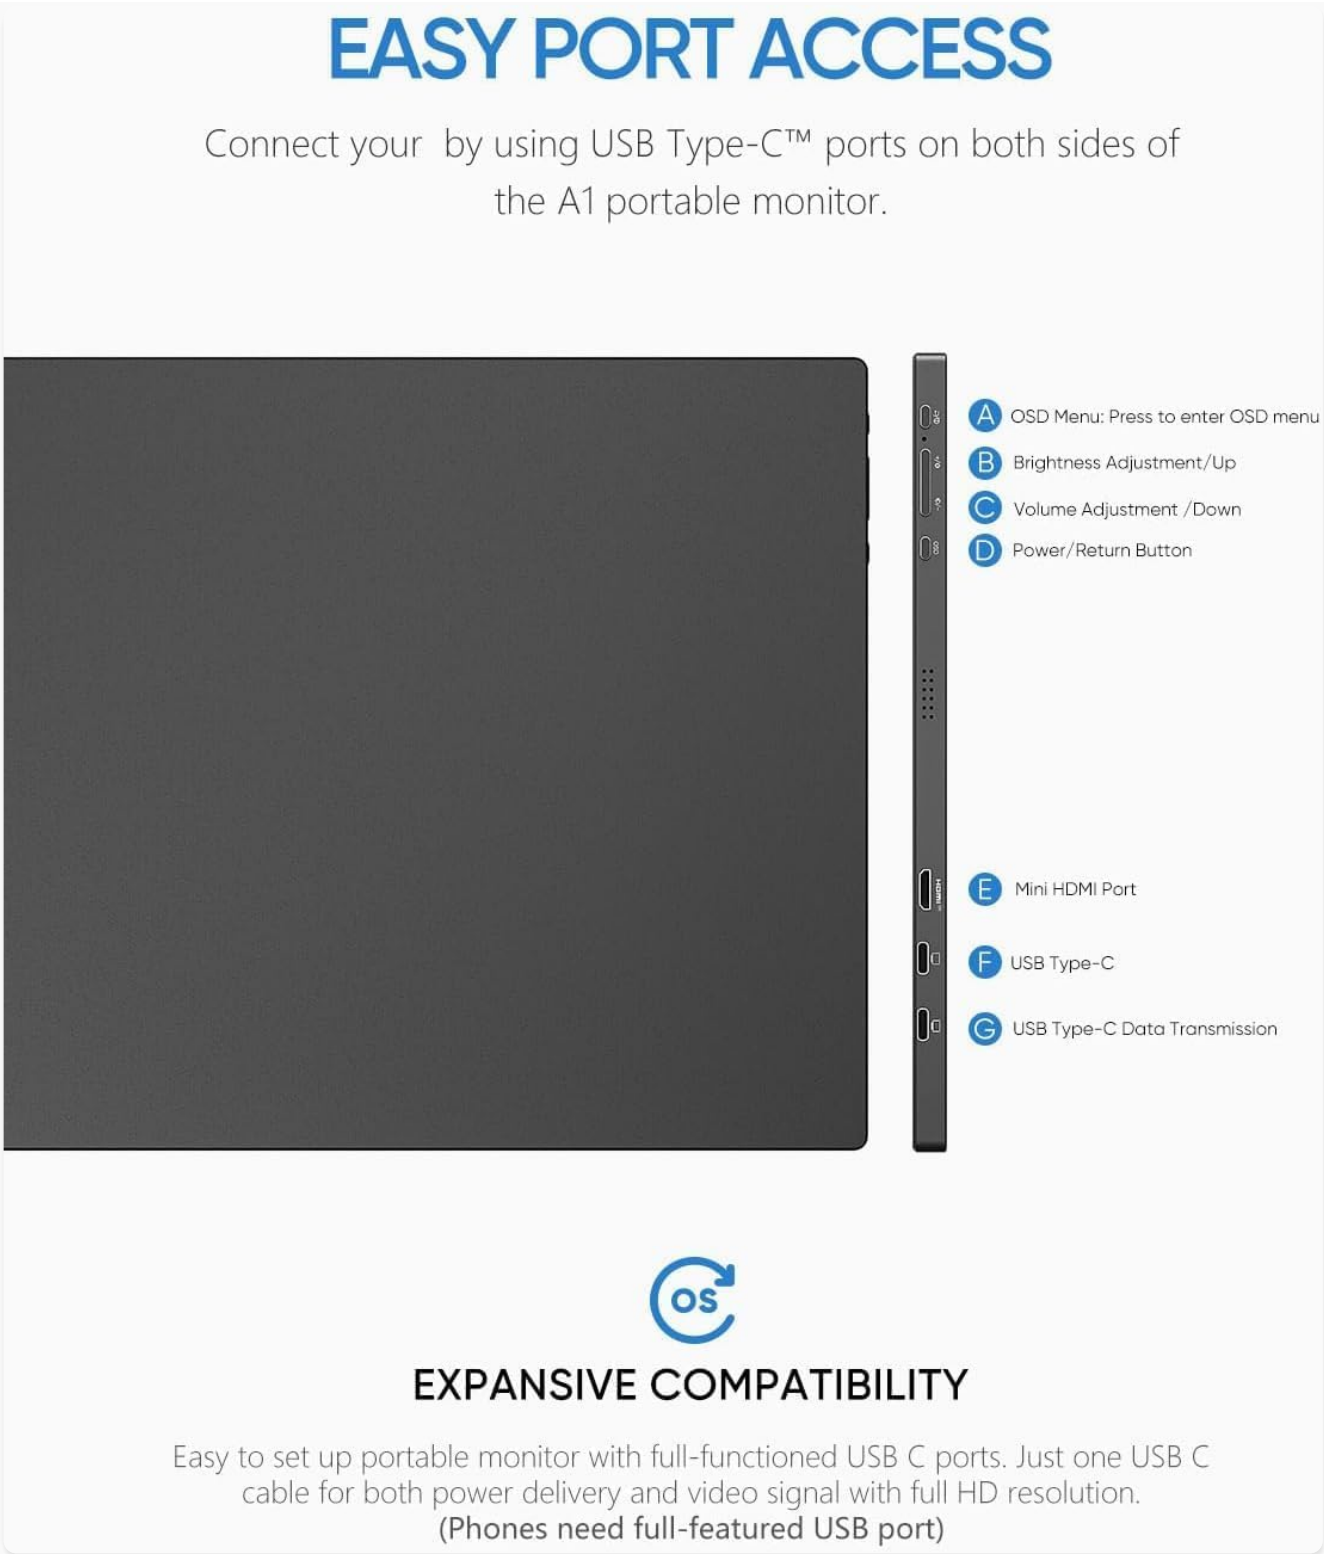



Image: A diagram illustrating the side ports and On-Screen Display (OSD) control buttons on the ARZOPA Portable Monitor A1, including Mini HDMI, USB Type-C, and power/menu buttons.

- **A: OSD Menu Button:** Press to enter the OSD menu.
- **B: Brightness Adjustment / Up:** Use to increase brightness or navigate up in the OSD menu.
- **C: Volume Adjustment / Down:** Use to adjust volume or navigate down in the OSD menu.
- **D: Power / Return Button:** Press and hold to power on/off. Short press to return in the OSD menu.
- **E: Mini HDMI Port:** For video input from devices with HDMI output.
- **F: USB Type-C Port (Power/Video):** Full-featured USB-C port for power and video signal.
- **G: USB Type-C Data Transmission (Power):** Primarily for power input, can also be used for data transmission if supported by the connected device.

## 4.2 On-Screen Display (OSD) Menu

To access the OSD menu, press the OSD Menu Button (A). Use the Brightness/Up (B) and Volume/Down (C) buttons to navigate through the options, and the OSD Menu Button (A) to select. Use the Power/Return Button (D) to exit a menu or return to the previous level.
Common OSD settings include:

- **Brightness/Contrast:** Adjust display luminance and contrast levels.
- **Color Settings:** Modify color temperature, hue, and saturation.
- **Input Source:** Manually select between USB-C and HDMI inputs.
- **Audio:** Adjust volume, mute, or select audio input.
- **Aspect Ratio:** Choose between 16:9, 4:3, or auto.
- **HDR Mode:** Enable or disable High Dynamic Range.
- **Language:** Select the OSD menu language.

## 4.3 Display Modes

When connected to a computer, you can configure the display mode through your operating system's display settings:

- **Duplicate Mode:** The monitor displays the same content as your primary screen.
- **Extend Mode:** The monitor acts as an extension of your primary screen, providing more desktop space.
- **Second Screen Only:** Only the portable monitor displays content.

## 4.4 Connecting to Gaming Consoles and Smartphones

The ARZOPA A1 is compatible with various gaming consoles (Xbox, PS3/4/5, Nintendo Switch) and smartphones. Use the appropriate USB-C or HDMI connection as described in the setup section.

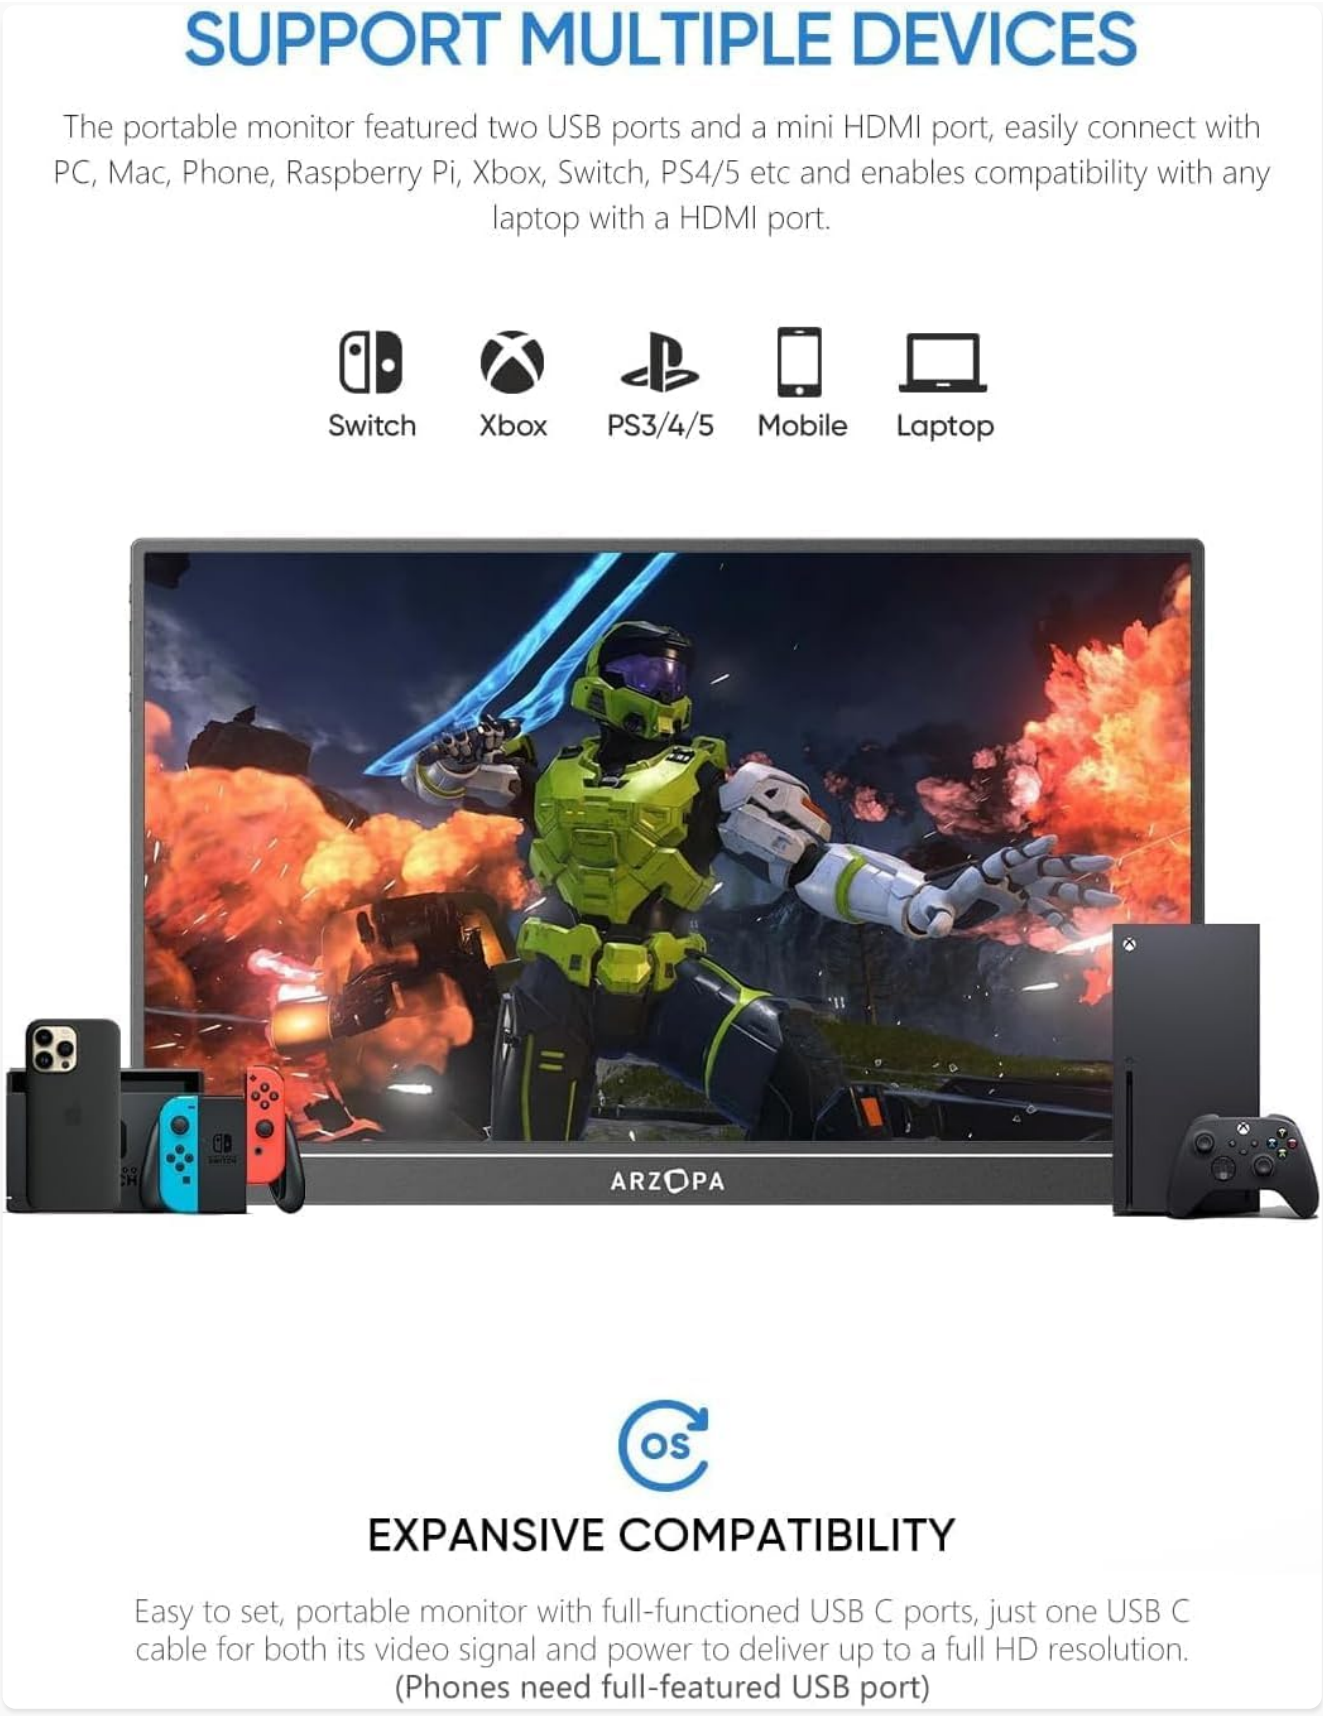



Image: The ARZOPA Portable Monitor A1 displaying a game, surrounded by various gaming consoles like Nintendo Switch, Xbox, and PlayStation, demonstrating its multi-device compatibility.

For smartphones, ensure your phone's USB-C port supports video output (DisplayPort Alternate Mode). Some phones may require an external power source for the monitor.

## 5. Maintenance

### 5.1 Cleaning the Monitor

To clean the monitor screen, gently wipe it with a soft, lint-free cloth. For stubborn marks, lightly dampen the cloth with water or a non-abrasive screen cleaner. Avoid using harsh chemicals, alcohol, or ammonia-based cleaners, as these can damage the screen surface.
For the monitor casing, use a soft, dry cloth. Do not spray cleaning liquids directly onto the monitor.

### 5.2 Storage and Handling

- Store the monitor in a cool, dry place away from direct sunlight and extreme temperatures.
- Avoid placing heavy objects on the monitor.
- When transporting, use a protective sleeve or case to prevent scratches and impacts.
- Do not expose the monitor to water or excessive humidity.

## 6. Troubleshooting

If you encounter issues with your ARZOPA Portable Monitor A1, please refer to the following common solutions:

### 6.1 No Signal / Black Screen

- **Check Cables:** Ensure all cables (USB-C, HDMI) are securely connected to both the monitor and your device.
- **Power Supply:** Verify the monitor is receiving sufficient power. If using HDMI, ensure a USB-C power cable is also connected. Try connecting an external power adapter if available.
- **Input Source:** Use the OSD menu to manually select the correct input source (USB-C or HDMI).
- **Device Compatibility:** Ensure your device's USB-C port supports video output (DisplayPort Alternate Mode) if using a single USB-C cable.
- **Restart Devices:** Restart your connected device (laptop, phone, console) and the monitor.

### 6.2 Flickering Screen / Unstable Display

- **Power Supply:** Insufficient power can cause flickering. Ensure the monitor is adequately powered, especially when brightness is high or connected to power-intensive devices. Use an external power adapter if necessary.
- **Cable Quality:** Try using different, high-quality cables. Faulty or low-quality cables can lead to signal issues.
- **Refresh Rate:** Check your device's display settings to ensure the refresh rate is set to 60Hz or a compatible frequency.

### 6.3 No Audio

- **Volume Level:** Check the monitor's volume in the OSD menu and your device's audio output settings.
- **Audio Output:** Ensure the ARZOPA monitor is selected as the audio output device in your computer's sound settings.
- **Cable Connection:** Verify that the video cable (USB-C or HDMI) is properly connected, as audio is transmitted through these cables.

### 6.4 Image Not Full Screen

- **Aspect Ratio:** Adjust the aspect ratio setting in the OSD menu or your device's display settings.
- **Resolution:** Ensure your device's output resolution is set to 1920x1080.

## 7. Specifications

| Feature | Specification |
|---|---|
| Brand | ARZOPA |
| Model Number | A1 |
| Screen Size | 15.6 inches |
| Resolution | FHD 1080p (1920 x 1080) |
| Display Type | LCD IPS |
| Aspect Ratio | 16:9 |
| Refresh Rate | 60 Hz |
| Brightness | 300 cd/m² |
| Contrast Ratio | 1000:1 |
| Viewing Angle | 178 degrees |
| Response Time | 3 milliseconds |
| Connectivity | 2x USB Type-C, 1x Mini HDMI |
| Audio | Built-In Speakers |
| Item Dimensions (D x W x H) | 1.5"D x 15"W x 9.5"H |
| Item Weight | 0.74 kg (1.6 lbs) |
| Color | Black |
| Additional Features | Flicker-Free, Portable, Integrated Kickstand |

## 8. Warranty and Support

### 8.1 Warranty Information

The ARZOPA Portable Monitor A1 comes with a **2-Year Warranty** from the date of purchase. This warranty covers manufacturing defects and malfunctions under normal use. It does not cover damage caused by misuse, accidents, unauthorized modifications, or natural disasters.
Please retain your proof of purchase for warranty claims.

### 8.2 Customer Support

If you require technical assistance, have questions about your product, or need to make a warranty claim, please contact ARZOPA customer support. Provide a detailed description of the issue, including any troubleshooting steps you have already taken.
For the most up-to-date contact information, please visit the official ARZOPA website or refer to the contact details provided with your product packaging.

© 2023 ARZOPA. All rights reserved.

## Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

**Name**

Anonymous

**Email**

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

**Question**

Example: How do I reset this device or fix this error?

**Details**

Model number, symptoms, what you tried, or the section of the manual you are using.

**Submit question**

---

**Open the live page**

**https://manuals.plus/asin/B0CRKGCSGF**

More documents and user manuals: **https://manuals.plus/**