MEETION C210

MEETION C210 Wireless Bluetooth Keyboard and Mouse User Manual

Model: C210

For Mac, iPad, iPhone, iMac, MacBook Air/Pro, and other compatible devices

1. Introduction

Thank you for choosing the MEETION C210 Wireless Bluetooth Keyboard and Mouse combo. This product is designed to enhance your productivity across multiple Apple devices and other compatible systems with its seamless connectivity, quiet operation, and slim, rechargeable design. This manual provides detailed instructions to help you set up, operate, and maintain your new keyboard and mouse.

The C210 combo offers dual connectivity options: a 2.4GHz USB-A channel and three Bluetooth channels, ensuring broad compatibility with Mac OS, iPad OS, and iOS. Both devices feature a low-profile design and are rechargeable, eliminating the need for frequent battery replacements.

Image: The MEETION C210 Wireless Keyboard and Mouse in Rose Gold, showcasing its sleek design and compact form factor.

Image: The MEETION C210 Keyboard and Mouse demonstrating compatibility with Mac OS and iPad OS/iOS devices.

2. Safety Information

- Keep the device away from water, fire, and high temperatures.
- Do not attempt to disassemble or repair the device yourself.
- Use only the provided charging cable or a certified equivalent to charge the devices.
- Avoid dropping or subjecting the devices to strong impacts.
- Dispose of batteries and electronic components responsibly according to local regulations.

3. Setup and Connection

3.1 Package Contents

Before proceeding, please ensure all items are present:

- MEETION C210 Wireless Keyboard
- MEETION C210 Wireless Mouse
- USB-A 2.4GHz Receiver
- USB-C to USB-A Adapter (for devices with USB-C ports only)
- USB-C Charging Cable
- User Manual (this document)

3.2 Charging the Devices

Both the keyboard and mouse are equipped with rechargeable lithium batteries. It is recommended to fully charge them before first use.

- Connect the provided USB-C charging cable to the charging port on the keyboard (located on the top edge) and the mouse (located on the front edge).
- Plug the other end of the cable into a USB power source (e.g., computer USB port, USB wall adapter).
- The keyboard's red indicator light will stay on during charging and turn off when fully charged.
- The mouse's red indicator light will stay on during charging and turn off when fully charged.
- A full charge typically takes approximately 2 hours and provides up to 400 hours of working time.

Image: The MEETION C210 Keyboard and Mouse connected via USB-C cables for charging, indicating a 2-hour full charge time and 400 hours of working time.

3.3 2.4GHz USB Receiver Connection

This method uses a USB receiver for a stable wireless connection.

1. Locate the USB-A 2.4GHz receiver. It is typically stored inside the mouse or in a small box within the packaging.
2. Turn on the keyboard switch (located on the top right edge) and the mouse switch (located on the bottom).
3. Plug the USB-A receiver into an available USB-A port on your computer. If your device only has USB-C ports, use the provided USB-C to USB-A adapter.
4. For the keyboard, press the **FN + Q** buttons once. The indicator light will turn green, signifying a successful connection.
5. For the mouse, click the bottom button (mode switch) until the green indicator light is on. This indicates a successful 2.4GHz connection.

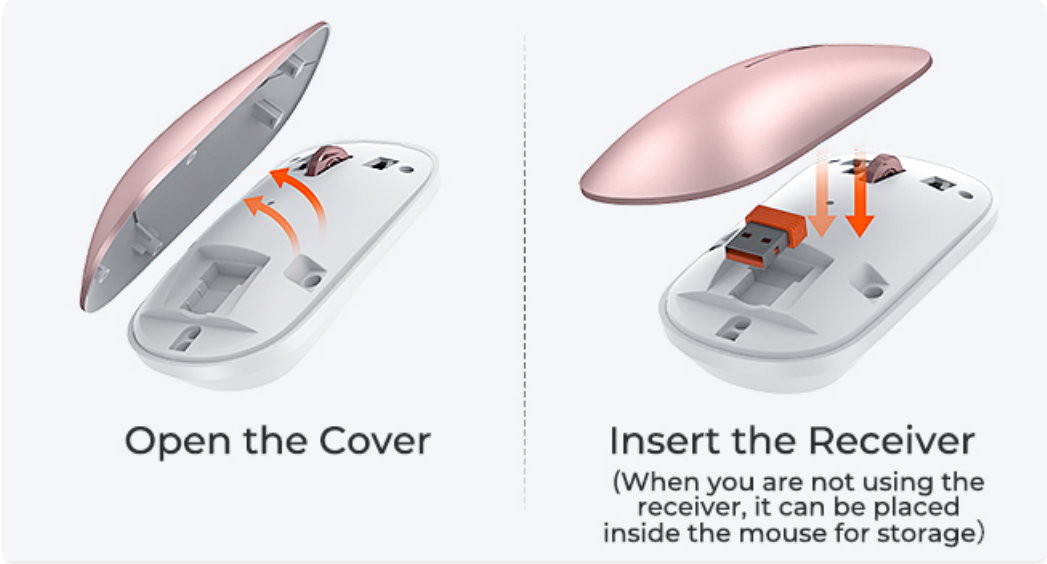

Image: Visual guide for connecting the MEETION C210 keyboard and mouse via the 2.4GHz USB receiver, including inserting the receiver and activating the 2.4G mode.

3.4 Bluetooth Connection (Multi-Device)

The C210 supports up to three Bluetooth connections, allowing you to switch between devices easily.

1. Turn on the keyboard switch and the mouse switch.
2. **For Keyboard:** Press and hold **FN + W** (for BT1), **FN + E** (for BT2), or **FN + R** (for BT3) for 3-5 seconds until the corresponding indicator light starts flashing. This puts the keyboard into pairing mode.
3. **For Mouse:** Click the bottom button (mode switch) until the blue indicator light for BT1, BT2, or BT3 starts flashing. This puts the mouse into pairing mode.
4. On your device (Mac, iPad, iPhone, etc.), go to Bluetooth settings and turn on Bluetooth.
5. Look for "Meetion_KB_BT1" (or BT2/BT3) for the keyboard and "Meetion_MS_BT1" (or BT2/BT3) for the mouse in the list of available devices.
6. Select the device name to complete the connection. The indicator light will stop flashing and remain solid, indicating a successful connection.

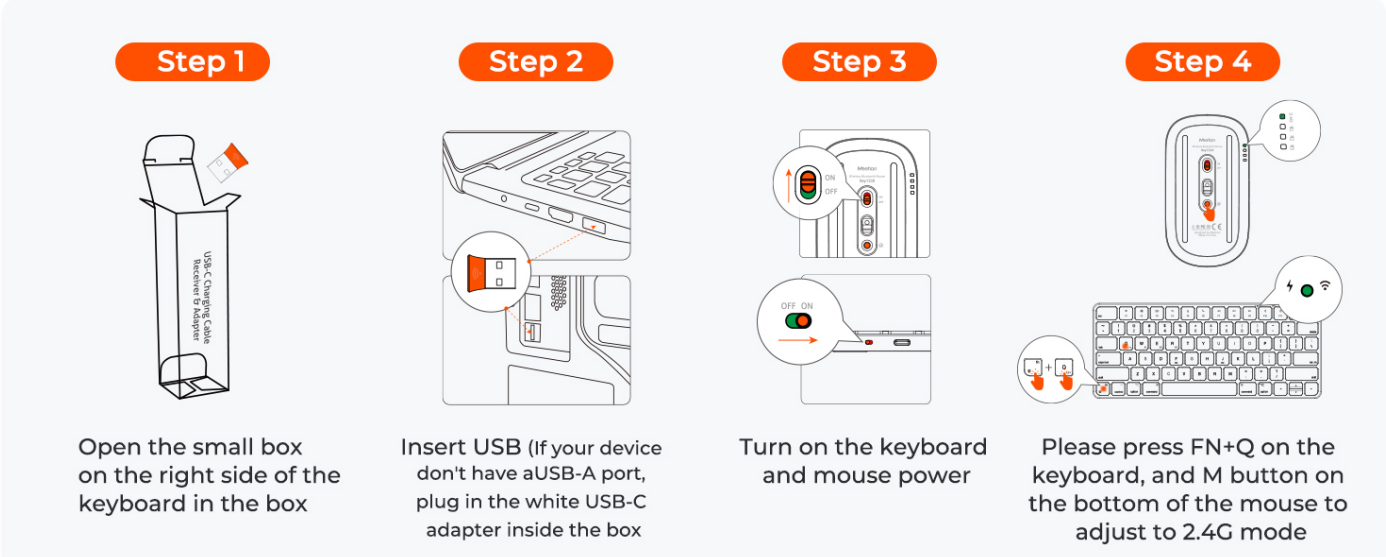

Image: Visual guide for connecting the MEETION C210 keyboard and mouse via Bluetooth, showing how to activate Bluetooth mode on both devices and pair them with a tablet.

Image: The MEETION C210 Keyboard and Mouse demonstrating its 'Four Modes in One' multi-device capability, connecting to a laptop, tablet, and smartphone via 2.4G and Bluetooth (BT1, BT2, BT3).

Your browser does not support the video tag.

Video: A step-by-step guide on connecting the MEETION C210 Keyboard and Mouse to various devices using both 2.4GHz USB and Bluetooth connections.

4. Operating Instructions

4.1 Keyboard Functions

- **Function Keys (F1-F12):** These keys perform various system functions (e.g., media control, volume, brightness) when pressed alone or in combination with the **Fn** key. Refer to your device's operating system for specific functions.
- **Multi-Device Switching:** To switch between connected devices, press **FN + Q** (for 2.4GHz), **FN + W** (for BT1), **FN + E** (for BT2), or **FN + R** (for BT3).
- **Scissor Switch Keys:** The keyboard features low-profile scissor switch keys for a quiet and comfortable typing

experience with fast response.

Image: A close-up view of the MEETION C210 keyboard, highlighting the quiet and comfortable scissor switch key mechanism.

Image: The MEETION C210 keyboard emphasizing its comfortable typing experience, fast response, and quiet scissor switch keys.

4.2 Mouse Functions

- **DPI Adjustment:** The mouse offers four adjustable DPI settings (800-1200-1600-2400). To adjust, press the left button, right button, and scroll wheel simultaneously.
- **Mode Switch Button:** The button on the bottom of the mouse allows you to switch between 2.4GHz mode and the three Bluetooth modes (BT1, BT2, BT3).
- **Simultaneous Control:** The mouse supports simultaneous left and right button control for various tasks.

Image: The bottom of the MEETION C210 mouse, illustrating the ON/OFF switch, mode switch, and instructions for adjusting DPI settings (800-1200-1600-2400).

5. Maintenance

- **Cleaning:** Use a soft, dry cloth to clean the surface of the keyboard and mouse. For stubborn dirt, slightly dampen the cloth with water or a mild cleaning solution. Avoid harsh chemicals.
- **Storage:** When not in use for extended periods, turn off both devices to conserve battery life. Store the USB receiver inside the mouse to prevent loss.
- **Battery Care:** Avoid completely draining the battery frequently. Charge the devices when the low battery indicator appears.

Image: The underside of the MEETION C210 mouse, showing how to open the cover and insert the USB receiver for secure storage when not in use.

6. Troubleshooting

- **Device not connecting:**
  - Ensure both the keyboard and mouse are turned on.
  - Check if the correct connection mode (2.4GHz or Bluetooth) is selected on both devices.
  - For Bluetooth, ensure your device's Bluetooth is enabled and the devices are in pairing mode (flashing indicator light).
  - For 2.4GHz, ensure the USB receiver is securely plugged into your computer.
  - Try restarting your computer or device.
- **Lag or intermittent connection:**
  - Ensure the devices are within the effective operating range (typically 10 meters) and there are no major obstructions.
  - Avoid using the devices near strong interference sources (e.g., Wi-Fi routers, other wireless devices).
  - Check battery levels and recharge if low.
- **Keys not responding or mouse erratic:**
  - Check battery levels.
  - For the mouse, ensure the optical sensor on the bottom is clean and free of debris.
  - Reconnect the device.
- **Mouse not charging to 100%:**
  - While the mouse battery may sometimes indicate less than 100% charge, it often still provides extended usage. If battery life is significantly shorter than expected, contact customer support.

7. Specifications

Feature	Description
Model Number	C210

Connectivity Technology	2.4GHz USB, Bluetooth (BT1, BT2, BT3)
Compatible Devices	Laptop, Personal Computer, Smartphone, Tablet (Mac OS, iPad OS, iOS)
Special Features	Lightweight, Portable, Rechargeable, Quiet Scissor Switch Keys (Keyboard), Adjustable DPI (Mouse)
Keyboard Battery	Lithium Polymer (included)
Mouse Battery	Lithium Polymer (included)
Charging Time	Approx. 2 hours
Working Time	Approx. 400 hours
Item Weight	1.72 pounds (combined)
Package Dimensions	15.91 x 5.67 x 1.54 inches

8. Warranty and Support

MEETION products are manufactured with high-quality standards. For warranty information, technical support, or any questions regarding your MEETION C210 Keyboard and Mouse, please refer to the contact information provided on the product packaging or visit the official MEETION website.

Please retain your proof of purchase for any warranty claims.

© 2024 MEETION Inc. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question