

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [GREVA](#) /

› [GREVA Android TV Box 13.0 \(Model Mini13-32\) User Manual](#)

GREVA Mini13-32

GREVA Android TV Box 13.0 (Model Mini13-32) User Manual

Your guide to setting up and operating your GREVA Smart TV Box.

1. PRODUCT OVERVIEW

The GREVA Android TV Box 13.0 (Model Mini13-32) is a high-performance streaming media player designed to transform your television into a smart entertainment hub. It features the latest Android 13.0 operating system, a powerful RK3528 quad-core processor, and supports 8K video decoding for an immersive viewing experience.

Key Features:

- **Operating System:** Android 13.0 for stable operation and broad app compatibility.
- **Processor:** Powerful Rockchip RK3528 quad-core Cortex-A53 CPU for fast performance.
- **Memory & Storage:** 4GB DDR3 RAM and 32GB eMMC ROM for smooth multitasking and ample app storage.
- **Video Decoding:** Supports H.265 and HDR10 for enhanced colors and efficient streaming.
- **Resolution:** Up to 8K ultimate HD video playback and 3D support.
- **Connectivity:** 2.4G/5G Dual-Band WiFi 6, Bluetooth 5.0, and Gigabit Ethernet LAN.
- **Special Functions:** DLNA and Miracast for screen mirroring.

Package Contents:

Upon unboxing, please verify that all items are present:

- GREVA Android TV Box (Model Mini13-32)
- Remote Control
- Power Adapter
- HDMI Cable
- User Manual (this document)



Image: Contents of the GREVA Android TV Box package, showing the main unit, remote control, power adapter, HDMI cable, and user manual.

2. SETUP GUIDE

Follow these steps to set up your GREVA Android TV Box.

2.1 Connecting the Device

1. **Connect to TV:** Use the provided HDMI cable to connect the HDMI port on the TV Box to an HDMI input port on your television.
2. **Connect Power:** Plug the power adapter into the DC 5V port on the TV Box, then plug the adapter into a wall outlet.
3. **Connect to Network (Optional):**
 - **Wired Connection:** For a stable connection, connect an Ethernet cable from your router to the LAN port on the TV Box.
 - **Wireless Connection:** If using Wi-Fi, you will configure this after initial boot-up.

4. **Connect Peripherals (Optional):** Insert USB devices (e.g., mouse, keyboard, USB drive) into the USB ports.



Image: Detailed view of the GREVA Android TV Box interfaces, illustrating connections for power (DC5V), Ethernet (LAN), HDMI, AV, IR extender, USB devices, and TF card.

2.2 Initial Power On

After connecting all necessary cables, turn on your television and select the correct HDMI input source. The GREVA TV Box should automatically power on and display the boot-up screen. If not, press the power button on the remote control.

3. OPERATING INSTRUCTIONS

3.1 Navigating the Interface

The GREVA TV Box runs on Android 13.0, providing a user-friendly interface. Use the included remote control to navigate through menus and select applications. The remote features directional buttons, an OK button, a Home button, a Back button, and dedicated buttons for popular streaming services.



Image: The GREVA Android TV Box remote control, highlighting its layout and dedicated application buttons.

3.2 Network Configuration

If you did not connect via Ethernet, you will need to set up Wi-Fi:

1. Go to **Settings** on the home screen.

2. Select **Network & Internet**.
3. Choose **Wi-Fi** and select your network from the list.
4. Enter your Wi-Fi password and select **Connect**.

The device supports 2.4G/5G Dual-Band WiFi 6 for fast and stable wireless connectivity.



Image: Illustration of the GREVA Android TV Box's wireless capabilities, including Bluetooth 4.0 and Wi-Fi 6, connecting to a television and various peripheral devices.

3.3 Installing and Using Applications

The TV Box comes with pre-installed applications. You can download more applications from the Google Play Store:

1. From the home screen, open the **Google Play Store** app.
2. Search for your desired application.
3. Select the app and click **Install**.
4. Once installed, the app will appear on your home screen or in the app drawer.

The device supports a wide range of streaming services and applications.

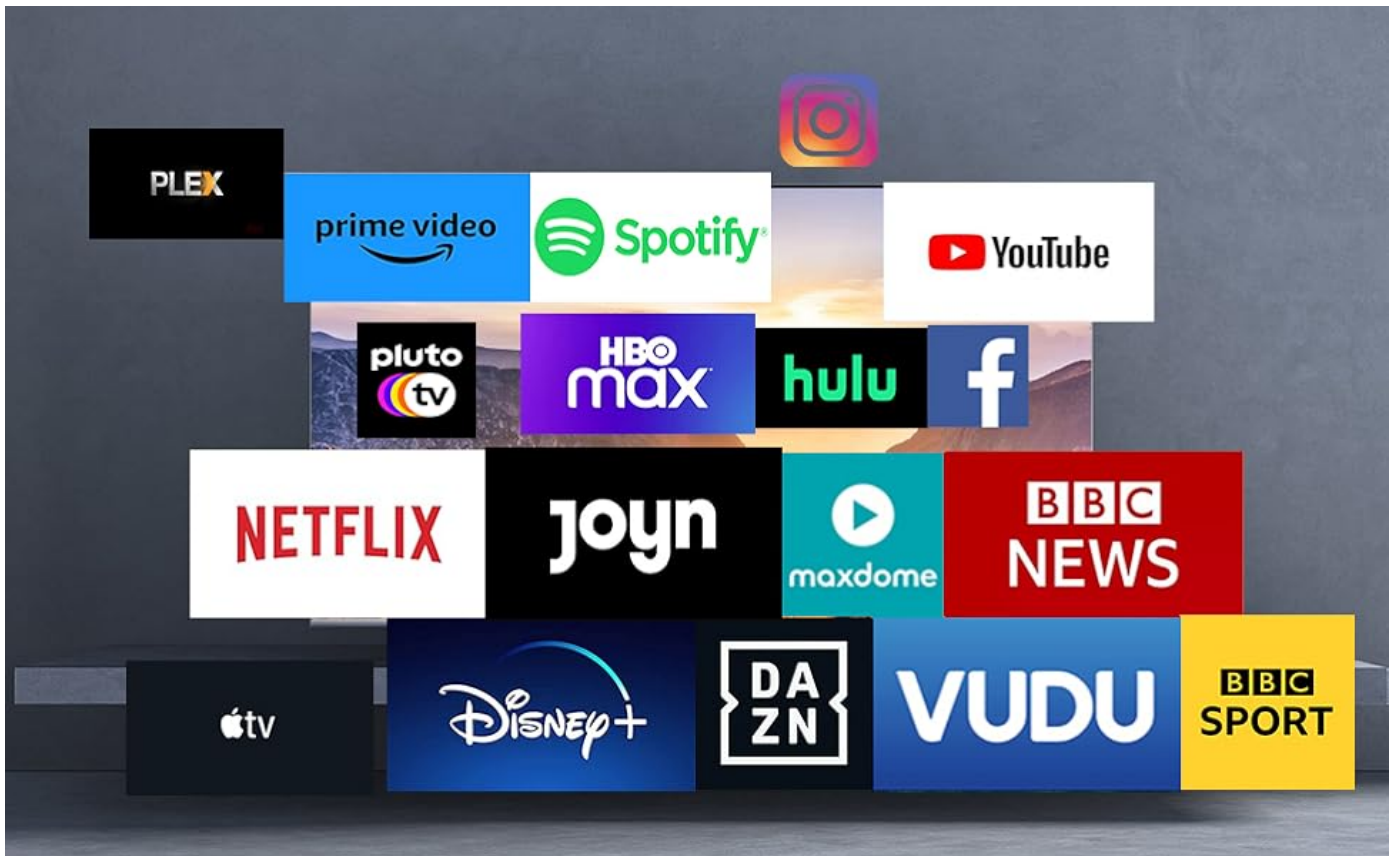


Image: A display showing numerous streaming application icons, demonstrating the wide range of supported services on the GREVA Android TV Box.

3.4 Screen Mirroring (DLNA & Miracast)

The GREVA TV Box supports DLNA and Miracast technologies, allowing you to mirror content from your compatible smartphone or tablet to your television screen.

1. Ensure your mobile device and the TV Box are connected to the same Wi-Fi network.
2. On your mobile device, enable the screen mirroring feature (often called "Cast," "Smart View," "Wireless Display," or "Miracast").
3. Select the GREVA TV Box from the list of available devices.
4. Your mobile device's screen should now be mirrored on your TV.



Image: A smartphone displaying content that is simultaneously mirrored onto a large television screen, illustrating the screen mirroring functionality.

4. MAINTENANCE

To ensure optimal performance and longevity of your GREVA Android TV Box, follow these maintenance guidelines:

- **Software Updates:** Periodically check for system updates in the Settings menu to ensure you have the latest features and security patches.
- **Cleaning:** Use a soft, dry cloth to clean the exterior of the device. Avoid liquid cleaners or abrasive materials.
- **Ventilation:** Ensure the TV Box is placed in a well-ventilated area to prevent overheating. Do not cover ventilation openings.
- **Storage Management:** Regularly clear cache from applications and uninstall unused apps to free up storage space and maintain performance.

5. TROUBLESHOOTING

If you encounter issues with your GREVA Android TV Box, refer to the following common problems and solutions:

Problem	Possible Solution
No Power / Device Not Turning On	<ul style="list-style-type: none">◦ Ensure the power adapter is securely connected to the TV Box and a working power outlet.◦ Try a different power outlet.◦ Press the power button on the remote control or the device itself.
No Signal on TV Screen	<ul style="list-style-type: none">◦ Verify the HDMI cable is securely connected to both the TV Box and the TV.◦ Ensure your TV is set to the correct HDMI input source.◦ Try a different HDMI cable or TV HDMI port.
Wi-Fi Connection Issues	<ul style="list-style-type: none">◦ Check if your router is working correctly.◦ Go to Settings > Network & Internet > Wi-Fi and ensure Wi-Fi is enabled and connected to your network.◦ Re-enter your Wi-Fi password.◦ Restart both the TV Box and your router.
Applications Crashing or Freezing	<ul style="list-style-type: none">◦ Close and reopen the application.◦ Clear the app's cache: Settings > Apps > [App Name] > Clear Cache.◦ Ensure the TV Box has sufficient free storage space.◦ Restart the TV Box.

If problems persist, please contact customer support.

6. SPECIFICATIONS

Detailed technical specifications for the GREVA Android TV Box 13.0 (Model Mini13-32):

Feature	Detail
---------	--------

Feature	Detail
Brand	GREVA
Model Name	Mini13
Item Model Number	Mini13-32
Operating System	Android 13.0
Processor	Rockchip RK3528 Quad-core Cortex-A53
RAM	4GB DDR3
ROM	32GB eMMC
Resolution Support	Up to 8K
Video Decoding	H.265, HDR10
Wireless Connectivity	2.4G/5G Dual-Band WiFi 6, Bluetooth 5.0
Wired Connectivity	Gigabit Ethernet LAN
Ports	HDMI, USB 3.0, USB 2.0, AV, DC 5V, TF Card Slot, LAN
Special Features	DLNA, Miracast, 3D Support
Dimensions	3.38 x 3.38 x 0.66 inches
Item Weight	10.8 ounces
Color	Black

7. WARRANTY AND SUPPORT

GREVA is committed to providing quality products and customer satisfaction.

- **Return Policy:** We offer a 30-day return/exchange policy on all orders if you are not satisfied with your purchase.
- **Customer Support:** If you have any questions or encounter issues with your product, please contact us. We aim to respond to customer inquiries within 24 hours.

For further assistance, please refer to the contact information provided with your purchase or visit the official GREVA website.