

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [surmen](#) /

> [Surmen Wireless 60% Mechanical Gaming Keyboard User Manual](#)

surmen GT61

Surmen Wireless 60% Mechanical Gaming Keyboard User Manual

MODEL: GT61

Introduction

Thank you for choosing the Surmen Wireless 60% Mechanical Gaming Keyboard. This compact and versatile keyboard is designed for an enhanced typing and gaming experience, offering multiple connectivity options, customizable RGB lighting, and hot-swappable switches. This manual provides detailed instructions to help you set up, operate, and maintain your keyboard.

- **Hot-swappable PCB:** Allows for easy replacement of 3-pin switches, compatible with most MX-style switches (e.g., Cherry, Gateron, Kailh).
- **Multi-Device Connectivity:** Connects to up to 3 devices via Bluetooth (BT5.0) and also supports USB-C wired connection, ideal for PC, laptop, tablet, and smartphone use.
- **Gateron Red Switches:** Provides a light, linear, and quiet typing experience, suitable for both office work and gaming.
- **Durable PBT Keycaps:** Features dye-sublimation PBT keycaps that are resistant to shine and wear, ensuring longevity. Includes 3 extra keycaps (ESC, Spacebar, Enter) for customization.
- **RGB Backlight:** Equipped with vibrant RGB lighting for a personalized aesthetic.
- **Long Battery Life:** Built-in 1800mAh battery offers up to 24 hours of use with static RGB lighting or up to 5 days of normal use (8 hours/day).

Setup

Package Contents

- Surmen Wireless 60% Mechanical Gaming Keyboard
- USB-C Cable
- Keycap Puller
- Extra Keycaps (ESC, Spacebar, Enter)

Initial Charging

Before first use, it is recommended to fully charge the keyboard. Connect the provided USB-C cable to the keyboard's USB-C port and the other end to a powered USB port on your computer or a wall adapter. The keyboard features an 1800mAh battery for extended use.



The keyboard features an 1800mAh battery for long-lasting performance.

Connectivity Options

The keyboard supports both wired USB-C and wireless Bluetooth 5.0 connections.


More Modes More choices



Wired



Bluetooth

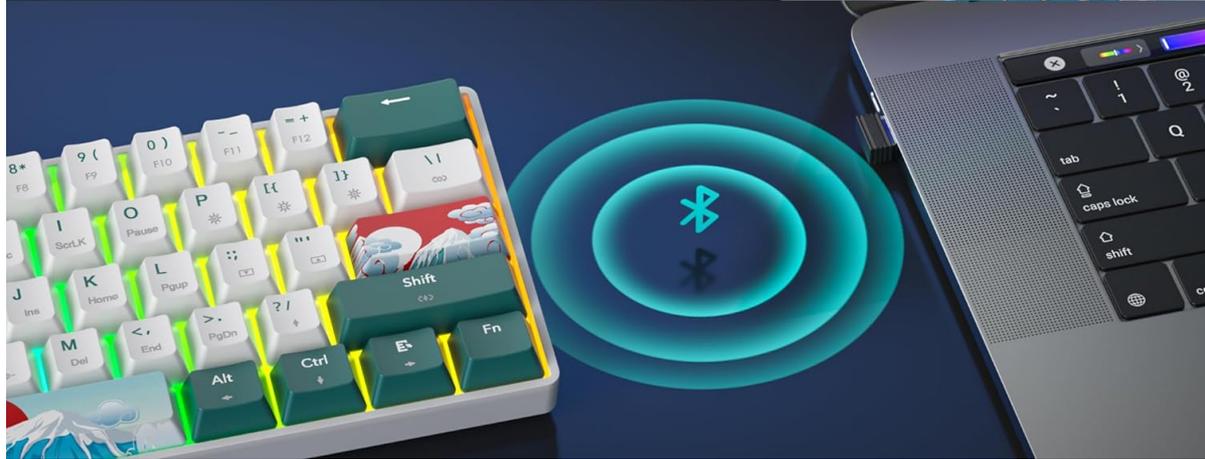

The keyboard offers both wired and wireless connectivity options for versatile use.

Bluetooth Connection

1. Ensure the keyboard's power switch (located on the back or side) is in the ON position.
2. Press **Fn + E**, **Fn + R**, or **Fn + T** to select one of the three Bluetooth channels (BT1, BT2, BT3). The corresponding key (Q, W, or E) will flash to indicate pairing mode.
3. On your device (PC, laptop, tablet, smartphone), enable Bluetooth and search for