

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [KSANA](#) /

› [KSANA 3-Light Bathroom Vanity Light Fixture Instruction Manual](#)

KSANA B0CT313DVV

KSANA 3-Light Bathroom Vanity Light Fixture Instruction Manual

Model: B0CT313DVV

[Introduction](#) [Safety](#) [Contents](#) [Specifications](#) [Setup](#) [Operating](#) [Maintenance](#)
[Troubleshooting](#) [Warranty](#)

1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your KSANA 3-Light Bathroom Vanity Light Fixture. Please read this manual thoroughly before installation and retain it for future reference. Proper installation and care will ensure optimal performance and longevity of your lighting fixture.



Image 1.1: KSANA 3-Light Bathroom Vanity Light Fixture

2. IMPORTANT SAFETY INFORMATION

WARNING: RISK OF ELECTRIC SHOCK. Ensure power is turned off at the circuit breaker or fuse box before installation, maintenance, or bulb replacement. Do not attempt installation if you are not familiar with electrical wiring. Consult a qualified electrician.

- This product is intended for indoor use only.
- Do not exceed the maximum wattage specified for the bulbs.
- Handle glass components with care to prevent breakage.
- Ensure all connections are secure and properly insulated.
- Keep flammable materials away from the light fixture.
- This fixture is ETL-listed, ensuring compliance with safety standards.

3. PACKAGE CONTENTS

Verify that all components are present and undamaged before beginning installation. If any parts are missing or damaged, contact customer support.

- 1 x KSANA 3-Light Bathroom Vanity Light Fixture (Black and Plating Brass)
- 3 x Clear Glass Shades
- 1 x Mounting Plate
- 1 x Hardware Kit (screws, wire nuts, etc.)
- 1 x Instruction Manual (this document)

Note: E26 Base Type A bulbs (max 60W each) are **not included** and must be purchased separately. Dimmer bulbs and dimmer switches are also not included.

4. PRODUCT SPECIFICATIONS

Feature	Detail
Model	B0CT313DVV
Dimensions (L x W x H)	24.4" x 7.1" x 7.9"
Canopy Dimensions (L x W x H)	6" x 4.3" x 1"
Shade Dimensions (Diameter x Height)	6.3" x 4.3"
Material	Metal (Black and Plating Brass finish), Glass (Clear)
Number of Lights	3
Bulb Base	E26
Max Wattage per Bulb	60W
Voltage	110-120V
Dimmable	Yes (with compatible bulbs and dimmer switch, not included)
Installation Type	Semi Flush Mount (Wall Mount)
Certification	ETL Listed
Item Weight	4.4 Pounds

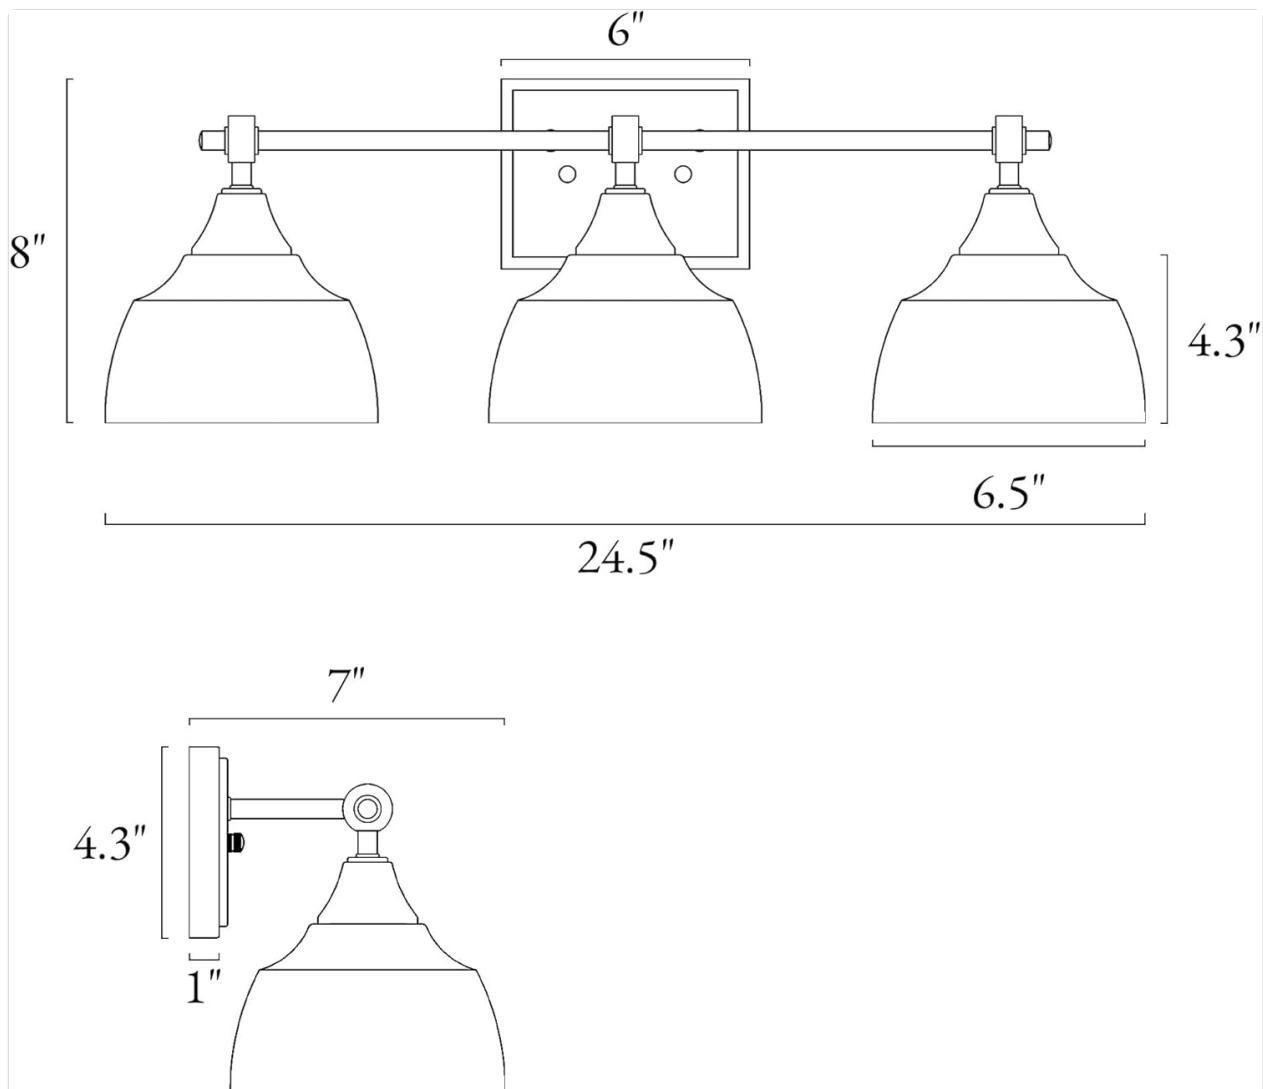


Image 4.1: Product Dimensions

5. INSTALLATION INSTRUCTIONS

Before you begin: Turn off power at the circuit breaker or fuse box. Ensure you have all necessary tools (screwdriver, wire strippers, electrical tape, etc.) and safety equipment (gloves, safety glasses).

- 1. Prepare the Mounting Surface:** Ensure the electrical box is securely mounted in the wall.
- 2. Attach the Mounting Plate:** Secure the mounting plate to the electrical box using the provided screws. Ensure the plate is level.
- 3. Make Electrical Connections:**
 - Connect the **green or bare copper ground wire** from the fixture to the **ground wire** from the electrical box using a wire nut.
 - Connect the **white (neutral) wire** from the fixture to the **white (neutral) wire** from the electrical box using a wire nut.
 - Connect the **black (live) wire** from the fixture to the **black (live) wire** from the electrical box using a wire nut.
 - Ensure all wire nuts are tightly secured and connections are insulated with electrical tape if necessary.
- 4. Mount the Fixture:** Carefully align the fixture's canopy with the mounting plate and secure it with the decorative nuts or screws provided.
- 5. Install the Glass Shades:** Gently place each clear glass shade over the bulb sockets and secure them

according to the fixture design (e.g., with a threaded ring or screws).

6. **Install Bulbs:** Screw in three E26 base Type A bulbs (max 60W each) into the sockets. Do not overtighten.

7. **Restore Power:** Turn the power back on at the circuit breaker. Test the light fixture.



Image 5.1: Mounting Hardware Detail



Image 5.2: Glass Shade and Socket Detail

6. OPERATING INSTRUCTIONS

Once installed and powered, the KSANA 3-Light Bathroom Vanity Light Fixture operates via your standard wall switch. If a dimmer switch and dimmable bulbs are installed, you can adjust the light intensity accordingly.

- **Turning On/Off:** Use the wall switch connected to the fixture to turn the lights on or off.
- **Dimming Function (Optional):** If you have installed dimmable E26 bulbs and a compatible dimmer switch, rotate or slide the dimmer switch to adjust the brightness level.

7. CARE AND MAINTENANCE

Regular cleaning and proper maintenance will help preserve the appearance and functionality of your light fixture.

- **Cleaning:** Always turn off the power before cleaning. Use a soft, dry cloth to wipe down the metal parts. For glass shades, a slightly damp cloth can be used, followed by a dry cloth to prevent water spots. Do not use abrasive cleaners, solvents, or polishes as they may damage the finish.

- **Bulb Replacement:** Ensure the fixture is cool and power is off before replacing bulbs. Unscrew the old bulb and screw in a new E26 base Type A bulb (max 60W).
- **Inspection:** Periodically check all connections and mounting hardware to ensure they remain secure.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on	No power to the fixture Loose wire connection Faulty bulb	Check circuit breaker/fuse. Ensure wall switch is on. Turn off power, check all wire connections. Replace bulb with a new, working one.
Light flickers	Loose bulb Incorrect bulb type for dimmer Loose wire connection	Tighten bulb. Ensure dimmable bulbs are used with a dimmer switch. Turn off power, check wire connections.
Humming sound from fixture	Incompatible dimmer switch or bulbs	Ensure dimmer switch and bulbs are compatible with each other and the fixture.


9. WARRANTY AND SUPPORT

Your KSANA 3-Light Bathroom Vanity Light Fixture is backed by a **2-year warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use.

Additionally, KSANA offers a **30-day free replacement** policy for any defective or damaged parts upon receipt. For warranty claims, technical support, or replacement parts, please contact KSANA customer service through the retailer where the product was purchased or visit the official KSANA website for contact information. Please retain your proof of purchase for warranty validation.


© 2025 KSANA. All rights reserved.

Related Documents - B0CT313DVV



[KSANA 2-Light Bathroom Vanity Light Installation Guide](#)

Installation guide and safety instructions for the KSANA 2-Light Bathroom Vanity Light, covering assembly, parts, wiring, and maintenance.



[KSANA 2-Light Gold Vanity Light Fixture Installation Guide](#)

Installation manual for the KSANA 2-Light Gold Vanity Light Fixture, providing safety warnings, parts list, assembly instructions, and cleaning tips.