

Manuals.plus /

> [Hoenofly](#) /

> Hoenofly 52-inch Wood Smart Ceiling Fan with Lights (Model YJ699) Instruction Manual

Hoenofly YJ699

Hoenofly 52-inch Wood Smart Ceiling Fan with Lights (Model YJ699) Instruction Manual

Model: YJ699 | Brand: Hoenofly

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Hoenofly 52-inch Wood Smart Ceiling Fan with Lights, Model YJ699. Please read this manual thoroughly before installation and use to ensure safe and efficient operation. Keep this manual for future reference.

SAFETY INFORMATION

WARNING: To reduce the risk of fire, electric shock, or personal injury, always follow these basic precautions:

- Ensure the power is turned off at the circuit breaker before installation or servicing.
- All wiring must be in accordance with national and local electrical codes. Consult a qualified electrician if you are unsure about wiring.
- Mount the fan directly to the building structure or to an outlet box marked "Acceptable for Fan Support of 35 lbs (15.9 kg) or less."
- Do not operate the fan with damaged blades or housing.
- Keep hands, clothing, and other objects clear of the fan blades when the fan is in operation.
- This fan is suitable for both indoor and covered outdoor use.

PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Motor Housing
- Fan Blades (3)
- Light Fixture with LED
- Remote Control (2 AAA batteries required, not included)
- Hanger Bracket
- Canopy and Decorative Cover

- Downrods (6-inch and 10-inch options)
- Mounting Hardware
- Instruction Manual

SETUP AND INSTALLATION

Follow these steps for proper installation of your ceiling fan. A detailed installation video is available for visual guidance.

1. **Prepare for Installation:** Turn off power at the main circuit breaker. Ensure the mounting location is secure and can support the fan's weight.
2. **Install Hanger Bracket:** Secure the hanger bracket to the ceiling outlet box. Ensure it is firmly attached.
3. **Assemble Downrod:** Choose either the 6-inch or 10-inch downrod based on your ceiling height. Feed the wires from the fan motor through the downrod.
4. **Hang the Fan:** Carefully lift the fan assembly and place the downrod ball into the hanger bracket.
5. **Make Electrical Connections:** Connect the fan wires to the household wiring according to the wiring diagram in the manual. Use the push-in wire connectors provided.
6. **Attach Canopy and Blades:** Slide the canopy up to cover the hanger bracket and secure it. Attach the fan blades to the motor housing.
7. **Install Light Fixture:** Connect the light fixture wires and attach the light kit to the bottom of the fan motor housing. Secure the acrylic cover.

Reversible DC Motor



Image: Exploded view diagram illustrating the assembly steps for the Hoenofly ceiling fan, including the hanger bracket, downrod, motor housing, blades, and light fixture.



Image: Diagram detailing the hanger bracket size and illustrating suitable installation types for both flat ceilings and sloped ceilings up to 15 degrees, with options for 6-inch and 10-inch downrods.

OPERATING INSTRUCTIONS

Your Hoenofly smart ceiling fan offers multiple control methods for convenience.

Remote Control Operation

The included remote control allows direct management of fan speeds, light settings, and fan direction.

- **Fan On/Off:** Press the "FAN ON/OFF" button.
- **Fan Speed:** Select from 6 speeds using the numbered buttons (1-6).
- **Light On/Off:** Press the light bulb icon button.
- **Light Dimming:** Use "LED+" and "LED-" buttons to adjust brightness (0% to 100%).
- **Color Temperature:** Use the color temperature buttons (blue and yellow light icons) to cycle through warm yellow (3000K), bright daylight (4000K), and cool white (5000K).
- **Fan Direction (Reversible DC Motor):** Press the reverse button (two arrows) to change the fan's direction for summer (downward airflow) or winter (upward airflow).
- **Timer:** Set a timer for 2, 4, or 8 hours using the "2H", "4H", "8H" buttons.

Customized LED Lights



5000K

Color-changing

3000K

0LM

Dimmable

2000LM

0%

100%

Image: The remote control for the Hoenofly smart ceiling fan, highlighting buttons for fan speed (1-6), fan on/off, light on/off, LED brightness adjustment, color temperature selection, fan direction, and timer settings.

Smart Control (Wi-Fi, Alexa, Google Assistant, App)

The fan can be controlled via the Tuya Smart App, Amazon Alexa, or Google Assistant for enhanced convenience.

1. **App Connection:** Download the Tuya Smart App. Ensure your phone's Bluetooth is enabled. Follow the in-app instructions to pair your fan.
2. **Voice Control Setup:** Link the Tuya Smart App with your Amazon Alexa or Google Assistant account.
3. **Voice Commands:** Use commands such as "Alexa, turn on the fan," "Google, set fan speed to 3," "Alexa, dim the light to 50%," or "Google, change light color to warm white."



Image: A visual representation of the Hoenofly smart ceiling fan's multiple control methods, including integration with Amazon Alexa, Google Assistant, the Tuya Smart App, and the physical remote control.



Image: The Tuya Smart App interface displaying fan control options, alongside logos for Amazon Alexa and Google Assistant, indicating voice control compatibility.

Reversible DC Motor

The fan features a reversible DC motor, allowing you to change the direction of the blades to optimize air circulation for different seasons.

- **Summer Mode:** Downward airflow creates a cooling effect.
- **Winter Mode:** Upward airflow circulates warm air trapped near the ceiling.

DC Motor Super Quiet



Quiet (<30dB)



Timers (0-8H)



Sleep Mode

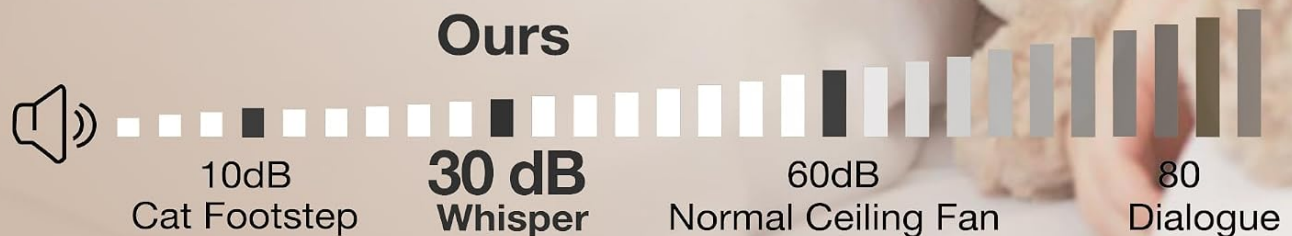


Image: A split image demonstrating the reversible function of the fan's DC motor, with one side showing the fan pushing air down for a cooling effect in summer, and the other showing it pulling air up to circulate warm air in winter.

MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your ceiling fan.

- **Cleaning:** Use a soft, damp cloth to clean the fan blades and motor housing. Do not use abrasive cleaners or solvents.
- **Blade Inspection:** Periodically check that all blade screws are tight.
- **Light Fixture:** The LED light is integrated and not user-replaceable. Contact customer support if the light malfunctions.
- **Remote Control Batteries:** Replace AAA batteries in the remote control as needed.

TROUBLESHOOTING

If you encounter issues with your fan, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Fan does not start	No power to the fan; loose wire connections; remote control battery dead.	Check circuit breaker; ensure all connections are secure; replace remote control batteries.
Fan is noisy	Loose screws on fan blades or motor housing; fan not properly balanced.	Tighten all screws; ensure blades are securely attached; check for proper balancing.
Light does not work	Loose wire connection; LED module failure.	Check light kit wiring; contact customer support for LED module replacement.
Remote control not working	Dead batteries; remote not paired with fan.	Replace batteries; refer to pairing instructions in the full manual.
Smart control (App/Voice) not working	Wi-Fi connectivity issues; incorrect app pairing; voice assistant not linked.	Check Wi-Fi connection; re-pair the fan with the app; ensure voice assistant is linked to the Tuya Smart App.

SPECIFICATIONS

Feature	Detail
Brand	Hoenofly
Model Name	YJ699
Product Dimensions	52"D x 52"W x 13.35"H
Color	Reddish-Brown Wood
Electric Fan Design	Ceiling Fan
Power Source	Quiet DC Motor
Style	Modern
Room Type	Bedroom, Living Room, Dining Room, Kitchen, Patios, Porch, Home Office
Special Feature	Voice App Remote Control + Quiet DC Motor + Color-changing Dimmable LED Light + 6 Reversible Speed
Recommended Uses	Air Circulation
Noise Level	30 Decibels
Wattage	30 watts
Finish Type	Wood
Number of Blades	3
Air Flow Capacity	4124 Cubic Feet Per Minute
Speed Settings	6

Feature	Detail
Voltage	120 Volts
Included Components	Remote Control (2*AAA Batteries required but not included)
Indoor/Outdoor Usage	Indoor, Outdoor (Covered)
Control Method	App, Remote, Voice
Efficiency	75% more energy-efficient (DC Motor)
Motor Type	DC
Smart Home Compatibility	Smart Home Compatible (Alexa, Google Assistant, Tuya App)
Installation Type	Downrod Mount (6" & 10" included)
Item Weight	12.27 pounds


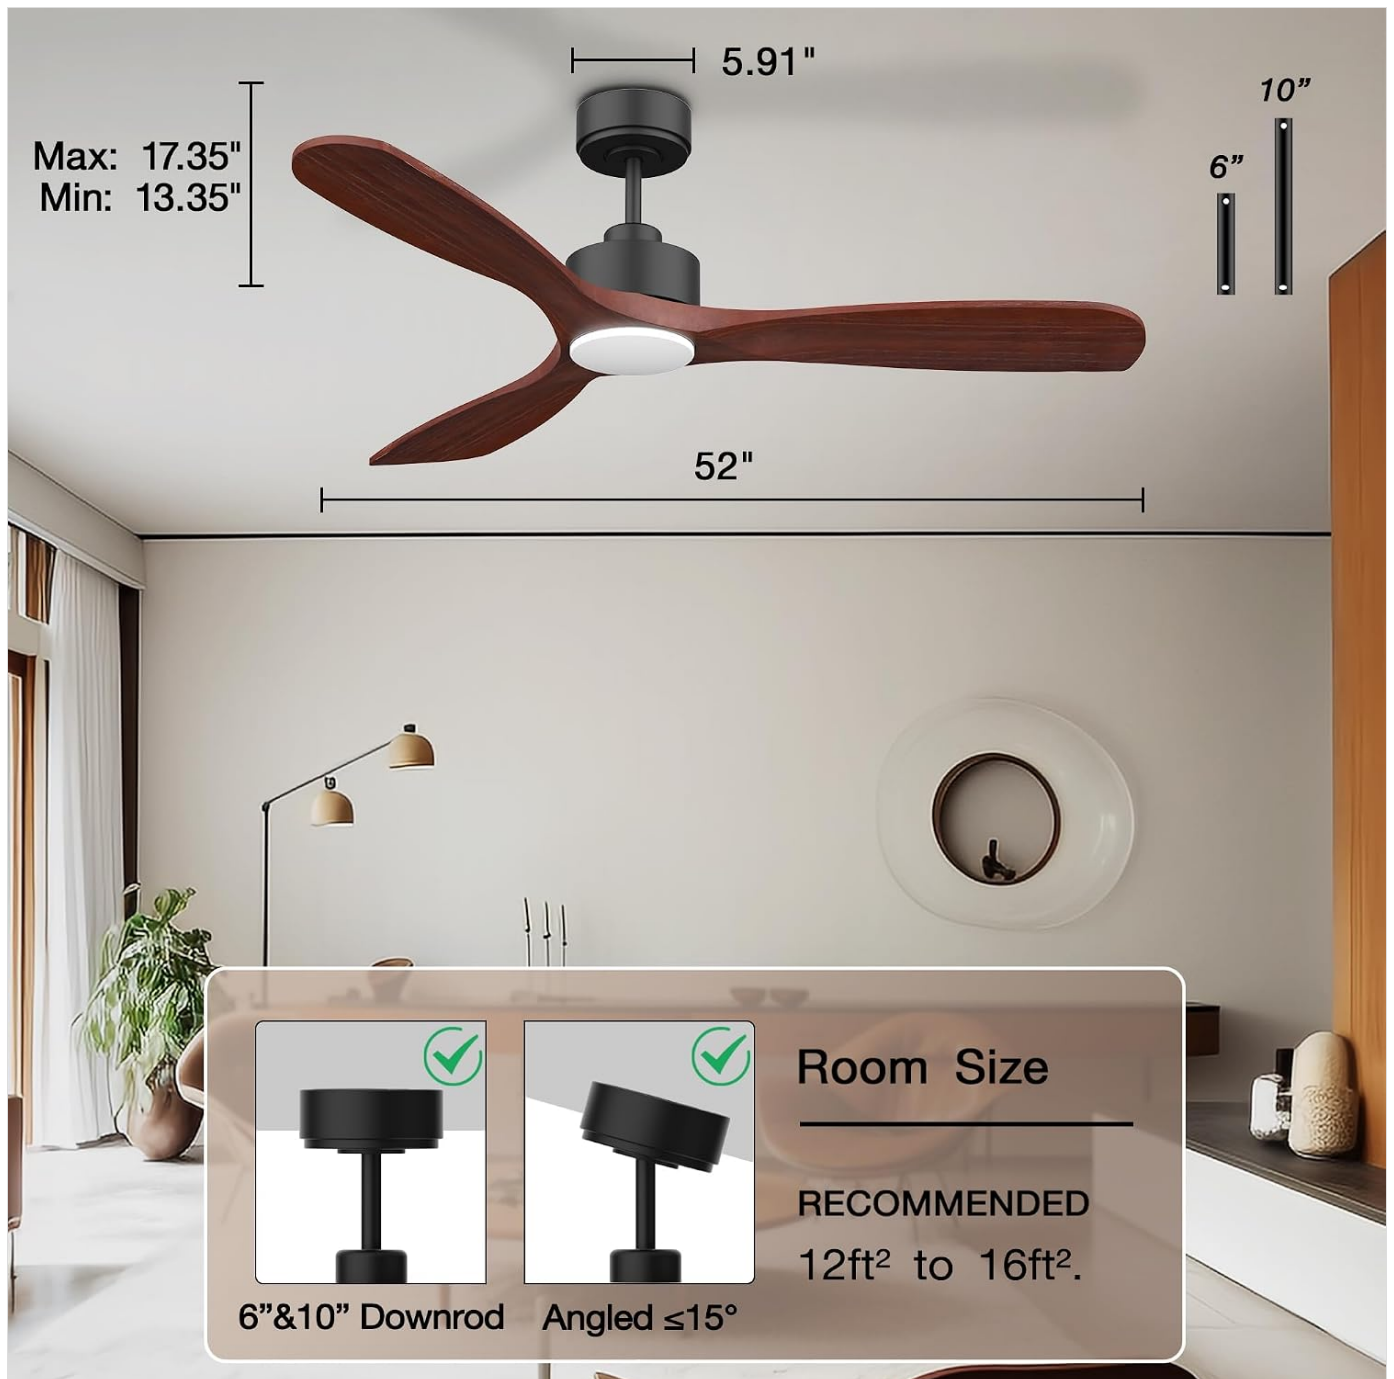


Image: The Hoenofly smart ceiling fan with key dimensions (52" width, 13.35" min height, 17.35" max height) and recommended room sizes (12ft² to 16ft²).

6 Speeds

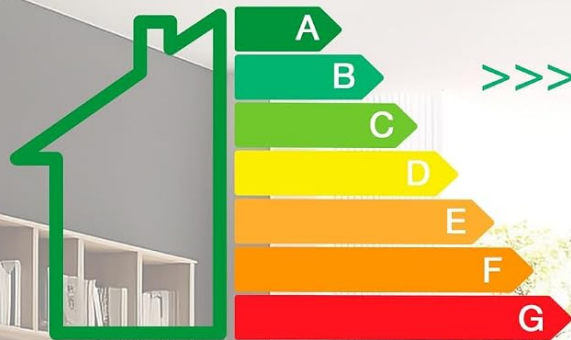

>>>> 75%

Ours

More Renergy-Efficient



Level 1-2



Level 3-4



Level 5-6

Image: An illustration highlighting the energy efficiency of the Hoenofly smart ceiling fan, indicating it is over 75% more energy-efficient compared to standard AC motor fans, with an energy rating scale.

DC Motor Super Quiet



Quiet (<30dB)



Timers (0-8H)



Sleep Mode

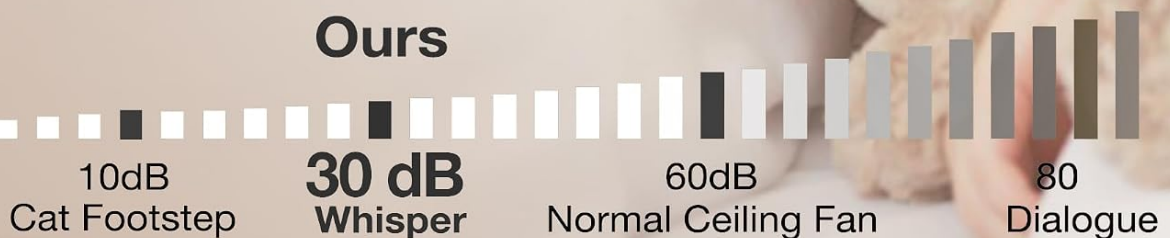


Image: A depiction of a child sleeping, used to illustrate the quiet operation of the Hoenofly DC motor ceiling fan, which produces less than 30dB of noise, making it suitable for bedrooms and nurseries.

WARRANTY AND SUPPORT

Hoenofly provides the following for your product:

- **Quality Period:** 1-year quality period for the entire smart ceiling fan.
- **Customer Support:** 24/7 customer support team dedicated to providing excellent after-sales service.
- **Contact:** Refer to your purchase documentation or the Hoenofly website for contact information.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0CT8SDC89>

More documents and user manuals: <https://manuals.plus/>