
[Manuals.plus](#) /

› [TELESIN](#) /

› TELESIN A10 Smart Wireless Bluetooth Remote Control User Manual for GoPro Hero 8-13 and Max

TELESIN A10

TELESIN A10 Smart Wireless Bluetooth Remote Control User Manual

Model: A10

INTRODUCTION

The TELESIN A10 Smart Wireless Bluetooth Remote Control is designed to provide convenient and efficient control over your GoPro camera. This remote allows you to manage various camera functions, including power on/off, shooting modes, and quick access to preset sub-modes. It is compatible with GoPro Hero 8, Hero 9, Hero 10, Hero 11, Hero 12, Hero 13, and GoPro Max cameras. When paired with mobile phones, it supports photographing functions only.

4 function buttons for easy setup

Special features, preset sub-modes can be freely switched.

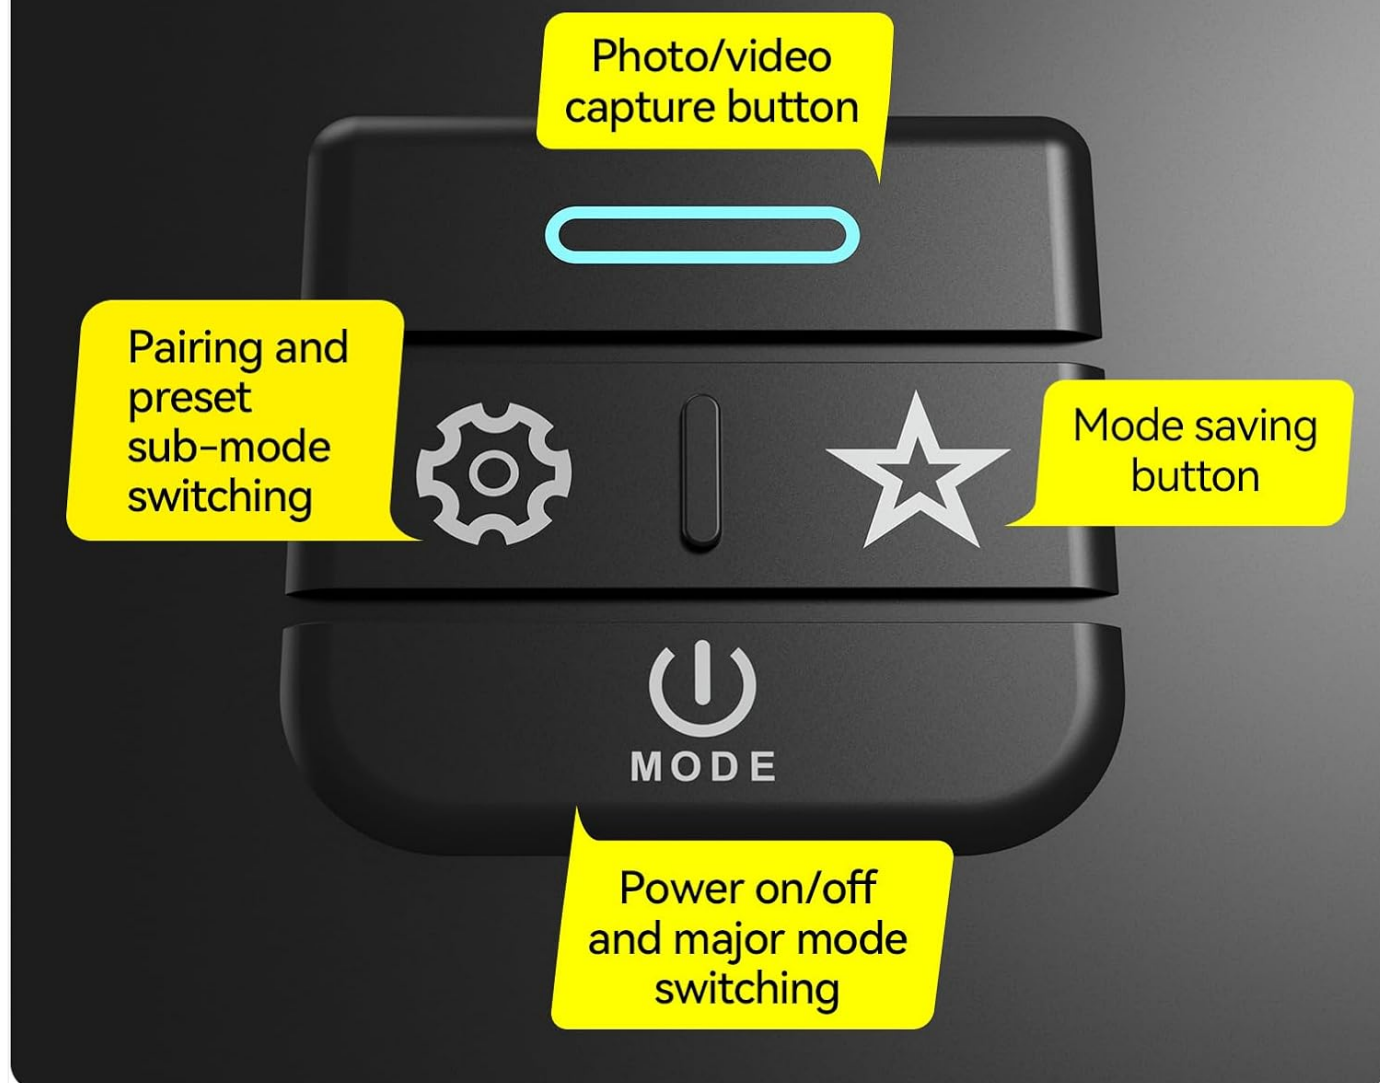


Image: The TELESIN A10 Smart Wireless Bluetooth Remote Control, showing its compact design and display screen.

PACKAGE CONTENTS

Please verify that all items are present in the package:

- 1 x Smart Bluetooth Remote
- 1 x Wrist Strap
- 1 x User Guide
- 1 x Charging Cable

SETUP AND CHARGING

Charging the Remote

The remote control features a Type-C charging port. A full charge takes approximately 2.5 hours and provides over 10

hours of battery life. The magnetic charging point is designed to be life waterproof and dust-proof, eliminating the need for additional protective covers during charging.

Simultaneously control five cameras

Supports up to one-to-five connection, allowing you to control five cameras simultaneously

5 cameras connected at the same time



Image: Illustration of the TELESIN A10 remote charging, highlighting its 10-hour battery life.

Pairing with Your GoPro Camera

Follow these steps to pair your TELESIN A10 remote with your GoPro camera:

1. Press and hold the **Setting Button** on the remote for 3 seconds to enter pairing mode. All indicators on the remote will blink.
2. On your GoPro camera, navigate to the pairing mode settings. This is typically found under **Connections > Connect Device > Remote**.
3. Wait for the pairing success notification to appear on your camera's screen.
4. Press the **Setting Button** on the remote again to exit pairing mode.

The remote is compatible with GoPro Hero 8, Hero 9, Hero 10, Hero 11, Hero 12, Hero 13, and GoPro Max. When pairing with a mobile phone, the remote only supports the photographing function.

Good compatibility



HERO 12

HERO 11

HERO 10

HERO 9

HERO 8

HERO MAX

Compatible with the
above six models.



It can also connect
to mobile phones

When connected to a
mobile phone, it can only
take photos and record
videos.

Image: Visual representation of the TELESIN A10 remote's compatibility with various GoPro Hero models (Hero 8, 9, 10, 11, 12, MAX) and mobile phones.

OPERATING THE REMOTE

Button Functions

The TELESIN A10 remote features four primary function buttons for easy control:

- **Photo/Video Capture Button:** Initiates photo capture or video recording.
- **Pairing and Preset Sub-mode Switching Button:** Used for entering pairing mode and cycling through preset sub-modes.
- **Mode Saving Button:** Saves your most frequently used sub-mode as a shortcut for quick access.
- **Power On/Off and Major Mode Switching Button:** Powers the camera on or off and switches between major camera modes.

10H long battery life Smooth shooting all day

300mAh 10 hours of battery life

Bluetooth low power technology



Image: Diagram illustrating the four function buttons on the TELESIN A10 remote control and their respective actions.

Controlling Multiple Cameras

The remote supports controlling up to five cameras simultaneously. This allows for synchronized operation across multiple GoPro devices. **Note:** GoPro Hero 13 can only be controlled individually.

Multi-scene Application

Inspiration is Not Limited



Use bluetooth remote control to shoot at various convenient to use
Remote Group Photo/Travel/Hiking/Riding/Mult-camera Shooting



Image: Visual demonstrating the TELESIN A10 remote's ability to control up to five cameras simultaneously.

Shortcut Mode

You can set your most frequently used sub-mode as a shortcut mode. This allows for quick activation with a single button press, enhancing efficiency during use.

Video Demonstration

Your browser does not support the video tag.

Video: This video demonstrates the TELESIN A10 remote control's functionality, including large mode switching, pattern collection, responsive low-latency control, and click-to-record actions with a GoPro camera.

MAINTENANCE

Water Resistance

The TELESIN A10 remote control has an IP54 water resistance rating. This means it is resistant to splashes and light rain.

It is not waterproof for underwater diving or prolonged submersion.Avoid immersing the remote completely in water to prevent damage.

Firmware Upgrades

The firmware of the remote control can be upgraded. Please refer to the official TELESIN website or support channels for information on available updates and instructions for performing upgrades.

TROUBLESHOOTING

- Remote not pairing with GoPro:**

Ensure both the remote and the GoPro are in pairing mode. Check that the GoPro's Bluetooth is enabled. If issues persist, try restarting both devices and repeating the pairing process.
- Poor battery life in cold weather:**

Lithium-ion batteries can experience reduced performance in cold temperatures. Keep the remote warm when not in use, or consider carrying a portable power bank for recharging in cold environments.
- GoPro not reconnecting after remote is out of range:**

If the remote loses connection due to distance, the GoPro may not automatically reconnect. You may need to power cycle the GoPro (remove and reinsert the battery) to re-establish the connection.
- Remote not responding:**

Check the remote's battery level. If the battery is low, recharge it. If fully charged, try restarting the remote by holding the power button or allowing the battery to drain completely and then recharging.

SPECIFICATIONS

Brand	TELESIN
Model Name	A10
Connectivity Technology	Bluetooth
Compatible Devices	GoPro Hero 8, 9, 10, 11, 12, 13, Max; Cell Phones (photographing function only)
Max Number of Supported Devices	5 (GoPro Hero 13 supports individual control only)
Maximum Range	80 meters
Battery Capacity	800mAh
Working Time	10 hours
Charging Time	2.5 hours
Water Resistance	IP54 (splash and dust resistant, not for diving)

WARRANTY AND SUPPORT

TELESIN provides customer support for any issues you may encounter with your A10 Smart Wireless Bluetooth Remote

Control. If you are unhappy with your purchase for any reason, please contact their online customer support for assistance. They are committed to resolving problems quickly and efficiently.

For warranty claims or technical support, please visit the official TELESIN website or refer to the contact information provided in your product packaging.

