

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Claymore](#) /

› [Claymore 3Face Pro X \(Light Gray\) Instruction Manual](#)

Claymore 3Face Pro X

Claymore 3Face Pro X (Light Gray) Instruction Manual

Model: 3Face Pro X

Brand: Claymore

1. PRODUCT OVERVIEW

The Claymore 3Face Pro X is a versatile, rechargeable surface area camping light designed for a wide range of outdoor and work lighting applications. It features multiple lighting modes, a powerful battery that doubles as a power bank, and a durable, waterproof construction. This manual provides detailed instructions for its proper use and maintenance.



Image: The Claymore 3Face Pro X in its primary light gray color, showcasing its sleek, rectangular design with three distinct light panels.

2. KEY FEATURES

- **Adjustable Brightness:** Offers illumination from 160 to 7,500 lumens, suitable for various environments.
- **Versatile Lighting Modes:** Five distinct modes including Cool White (6,500K), Warm White (3,000K), Orange (1,500K), Natural White (4,500K), and Soft Warm (2,500K).
- **High-Capacity Power Bank:** Equipped with a robust 39,200mAh battery, capable of charging external devices.
- **Extended Battery Life:** Provides up to 90 hours of continuous operation on a single charge (at lowest setting).
- **Durable Construction:** Features a high-impact polycarbonate body with IP66 waterproof rating for outdoor resilience.

- **Bluetooth App Control:** Allows for convenient control and adjustment via a dedicated mobile application.

5 LIGHT MODES



Image: A visual summary of the Claymore 3Face Pro X's key features, including lumen range, battery capacity, battery life, IP66 waterproof rating, power bank function, and Bluetooth app control.

EASY APP ASSISTANCE

Easily connect to dedicated app on your mobile device to control and adjust the lamp.

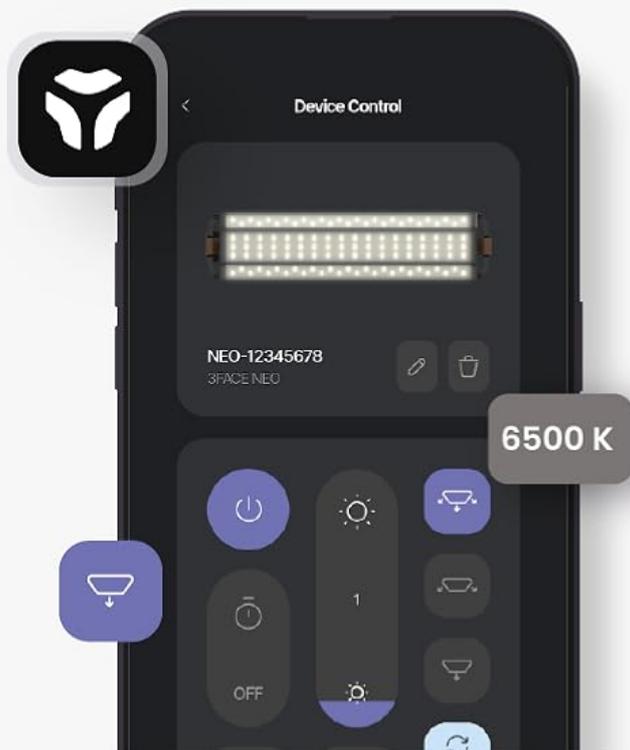


Image: Illustrations of the five distinct light modes: Cool White, Warm White, Orange, Natural White, and Soft Warm, with their respective color temperatures.

3. WHAT'S IN THE BOX

Upon unboxing your Claymore 3Face Pro X, please ensure all the following components are present:

- Claymore 3Face Pro X Main Unit
- Hard Shell Case
- USB-C to C Charging Cable
- Carabiner
- User Manual (this document)

BATTERY INDICATOR

Equipped with a heavy duty 39,200 mAh battery and power indicator.

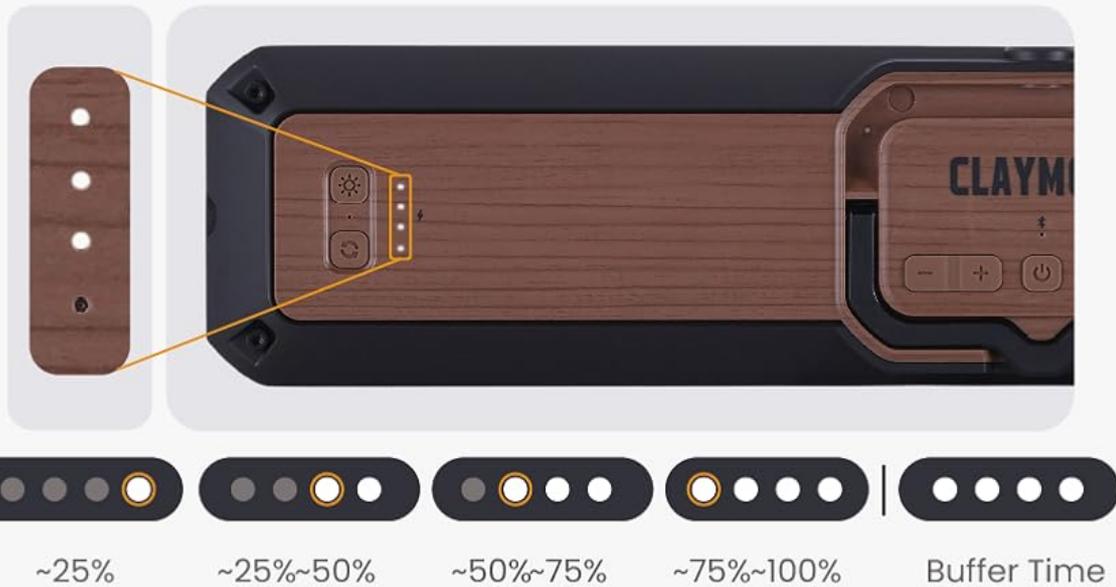


Image: A visual representation of all items included in the Claymore 3Face Pro X package: the main light unit, its hard shell case, a carabiner, and the USB-C to C charging cable.

4. SETUP

4.1 Initial Charging

Before first use, fully charge your Claymore 3Face Pro X. Connect the provided USB-C to C charging cable to the light's charging port and to a compatible USB power adapter (not included). The battery indicator lights will illuminate to show charging progress. A full charge is indicated when all lights are solid.

4.2 Mounting and Placement

The 3Face Pro X can be placed on a flat surface, hung using the integrated hanging loop or carabiner, or mounted on a tripod (tripod not included) via its standard screw mount. Ensure the light is stable and securely positioned before operation.

PRODUCT FEATURES



160 to 7,500
Lumens



39,200 mAh



Up to 90
Hours



IP66
Waterproof



Power Bank
Function



Bluetooth
App Control

Image: The Claymore 3Face Pro X light hanging inside a tent, demonstrating its hanging capability for overhead illumination.

5. OPERATING INSTRUCTIONS

5.1 Power On/Off

Press and hold the power button (usually marked with a power symbol) for approximately 2 seconds to turn the light on or off.

5.2 Adjusting Brightness

Once powered on, short press the brightness adjustment buttons (marked with '+' and '-' symbols) to cycle through different brightness levels. The light will typically cycle from low to high and back to low.

5.3 Selecting Light Modes

Short press the mode button (often marked with a sun or color temperature symbol) to switch between the five available light modes: Cool White, Warm White, Orange, Natural White, and Soft Warm. Each press will cycle to the next mode.

5.4 Power Bank Function

To use the 3Face Pro X as a power bank, connect your external device (e.g., smartphone, tablet) to the light's USB-C output port using a compatible charging cable. The light will automatically begin charging the connected device.

High-performance Lantern for Expansive, Bright Outdoor Area Coverage



Image: The Claymore 3Face Pro X light positioned on a crate, actively charging a smartphone via its power bank function, highlighting its utility beyond just illumination.

5.5 Battery Indicator

The light features a series of LED indicators that display the remaining battery life. Refer to the diagram below for interpretation:



DURABLE MULTI-USE VERSATILITY

The 3Face series featuring 3-sided LED, extended battery life, and app connectivity is versatility at its best! Use it as a backyard light, garage light, automotive light, work shed light, street vendor light, light bar, warehouse light, the possibilities are endless!

Image: A detailed diagram illustrating the battery indicator lights on the Claymore 3Face Pro X, showing the corresponding battery percentage for each illuminated LED.

5.6 Bluetooth App Control

For enhanced control, download the official Claymore app on your mobile device. Follow the in-app instructions to pair your 3Face Pro X via Bluetooth. The app allows for precise brightness adjustments, mode selection, and potentially other advanced settings.



ABOUT CLAYMORE

CLAYMORE, a Korean outdoor innovation pioneer, specializes in crafting cutting edge camping and outdoor essentials. Elevate your outdoor experience with CLAYMORE products that are designed to illuminate & enhance your every adventure.

Image: A smartphone screen displaying the Claymore mobile application interface, showing controls for device pairing, light intensity, and color temperature adjustments for the 3Face Pro X.

6. MAINTENANCE

6.1 Cleaning

To clean the light, wipe it with a soft, damp cloth. Do not use abrasive cleaners or solvents, as these may damage the surface or internal components. Ensure the charging port cover is securely closed before cleaning to maintain water resistance.

6.2 Storage

When not in use for extended periods, store the Claymore 3Face Pro X in its provided hard shell case in a cool, dry place, away from direct sunlight and extreme temperatures. It is recommended to charge the battery to approximately 50-70% before long-term storage to preserve battery health.


6.3 Battery Care

The integrated Lithium-Ion battery is designed for long life. To maximize its lifespan, avoid fully discharging the battery frequently. Recharge the unit when the battery indicator shows low power. Do not attempt to replace the battery yourself.

7. TROUBLESHOOTING

- **Light does not turn on:** Ensure the battery is charged. Connect to a power source and check the charging indicator. If still unresponsive, try a different charging cable or adapter.
- **Light not charging:** Verify the charging cable is securely connected to both the light and the power source. Ensure the power source is active.
- **Cannot connect via Bluetooth:** Ensure Bluetooth is enabled on your mobile device and the Claymore app is installed. Try restarting both the light and your mobile device. Ensure the light is within Bluetooth range.
- **Light output is dim or flickering:** This may indicate a low battery. Recharge the unit. If the issue persists after charging, contact customer support.
- **Power bank function not working:** Ensure the light has sufficient charge. Verify the connected device's charging cable is functional and properly inserted.

8. SPECIFICATIONS

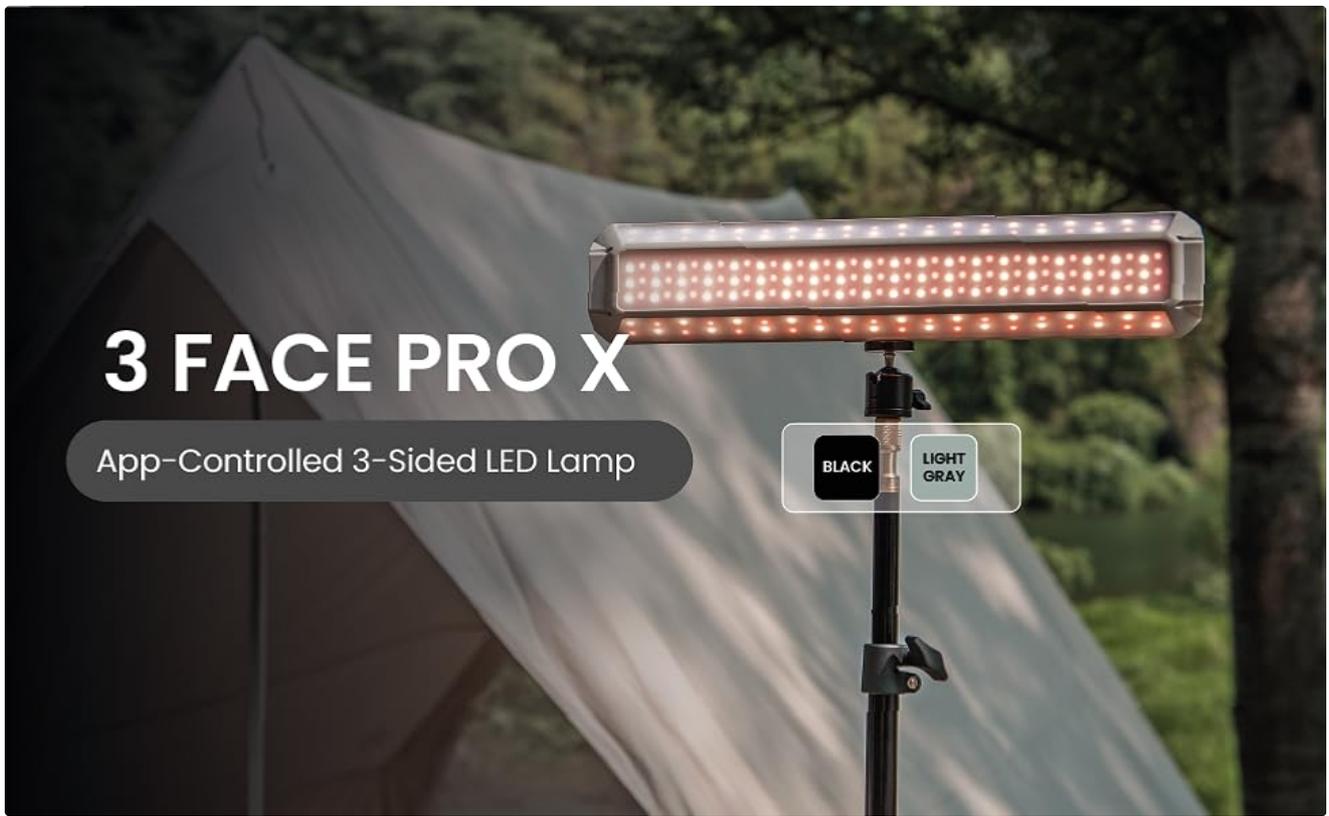

3 FACE PRO X

App-Controlled 3-Sided LED Lamp

Image: A diagram showing the physical dimensions (length, width, height) and weight of the Claymore 3Face Pro X.

Feature	Detail
Model Number	3Face Pro X
Dimensions (L x W x H)	14.4" x 3" x 1.7" (365mm x 75mm x 42.8mm)
Weight	3.71 pounds (1,202g)
Brightness	160 to 7,500 lumens
Battery Capacity	39,200mAh Lithium-Ion
Battery Life	Up to 90 hours (at lowest setting)
Water Resistance Level	IP66 Waterproof
Material	Plastic
Voltage	12 Volts (DC)
Light Source Type	Light Emitting Diode (LED)
Included Components	Carabiner, Charging Cable, Hard Shell Case
Manufacturer	Prism Co., Ltd

9. WARRANTY AND SUPPORT

For information regarding product warranty, please refer to the warranty card included with your purchase or visit the official Claymore website. Warranty terms and conditions may vary by region and retailer.

If you encounter any issues not covered in the troubleshooting section or require further assistance, please contact

Claymore customer support or the retailer from whom you purchased the product. Keep your proof of purchase for warranty claims.

Manufacturer: Prism Co., Ltd

Online Store: [Claymore Amazon Store](#)

10. IMPORTANT SAFETY INFORMATION

- Do not look directly into the light when it is on, as high brightness can cause eye strain or temporary vision impairment.
- Keep out of reach of children.
- Do not disassemble, modify, or attempt to repair the unit yourself. This may void the warranty and pose safety risks.
- Avoid exposing the light to extreme temperatures, open flames, or corrosive substances.
- Use only the provided charging cable or a certified equivalent.
- Dispose of the product and its battery responsibly according to local regulations.