ILIFE ILIFE T20s

ILIFE T20s Self-Emptying Robot Vacuum and Mop Combo User Manual

Brand: ILIFE | Model: T20s

1. Introduction

The ILIFE T20s is an advanced 3-in-1 robot vacuum and mop combo designed to provide comprehensive floor cleaning with minimal effort. Featuring powerful suction, precise LiDAR navigation, and a convenient self-emptying station, it ensures a consistently clean home environment. This manual provides essential information for setup, operation, maintenance, and troubleshooting to help you get the most out of your ILIFE T20s.



Figure 1: ILIFE T20s Robot Vacuum and Self-Emptying Station.

2. Safety Information

Please read all safety instructions carefully before using the appliance. Keep this manual for future reference.

- Do not use the robot in wet environments or near water.
- Ensure all cables, curtains, and fragile items are cleared from the cleaning path to prevent entanglement or damage.
- Do not allow children or pets to operate the robot. Supervise children when the robot is in use.
- Use only the original charging base and power adapter provided by ILIFE.
- Do not add cleaning solutions to the water tank to avoid corrosion. Use only clean water.
- Regularly clean the brushes and filters to maintain optimal performance and prevent blockages.

3. Package Contents

Verify that all items are present and in good condition upon unpacking:

- ILIFE T20s Robot Vacuum
- Self-Emptying Station
- 3.5L Capacity Dust Bags (multiple included)
- Power Adapter
- 2-in-1 Integrated Water Tank (300ml dustbin, 200ml water tank)
- Mop Pad
- Side Brushes
- High-Performance Filter
- Cleaning Tool
- User Manual

4. Product Overview

Robot Vacuum

The ILIFE T20s robot vacuum features a sleek, circular design with a LiDAR sensor on top for navigation. It has a main power button, a dustbin/water tank compartment, and side brushes for edge cleaning.



Figure 2: ILIFE T20s Robot Vacuum.

Self-Emptying Station

The self-emptying station is a compact unit that automatically empties the robot's dustbin into a larger capacity dust bag, providing up to 70 days of hands-free cleaning.



Figure 3: Self-Emptying Station with robot.

5. Setup

5.1 Charging the Robot

Place the self-empty station against a wall in an open area with at least 1.5 feet of clear space on either side and 5 feet in front. Connect the power adapter to the station and plug it into a wall outlet. Place the robot vacuum onto the charging contacts of the station. Ensure the robot is properly aligned and charging indicators illuminate.

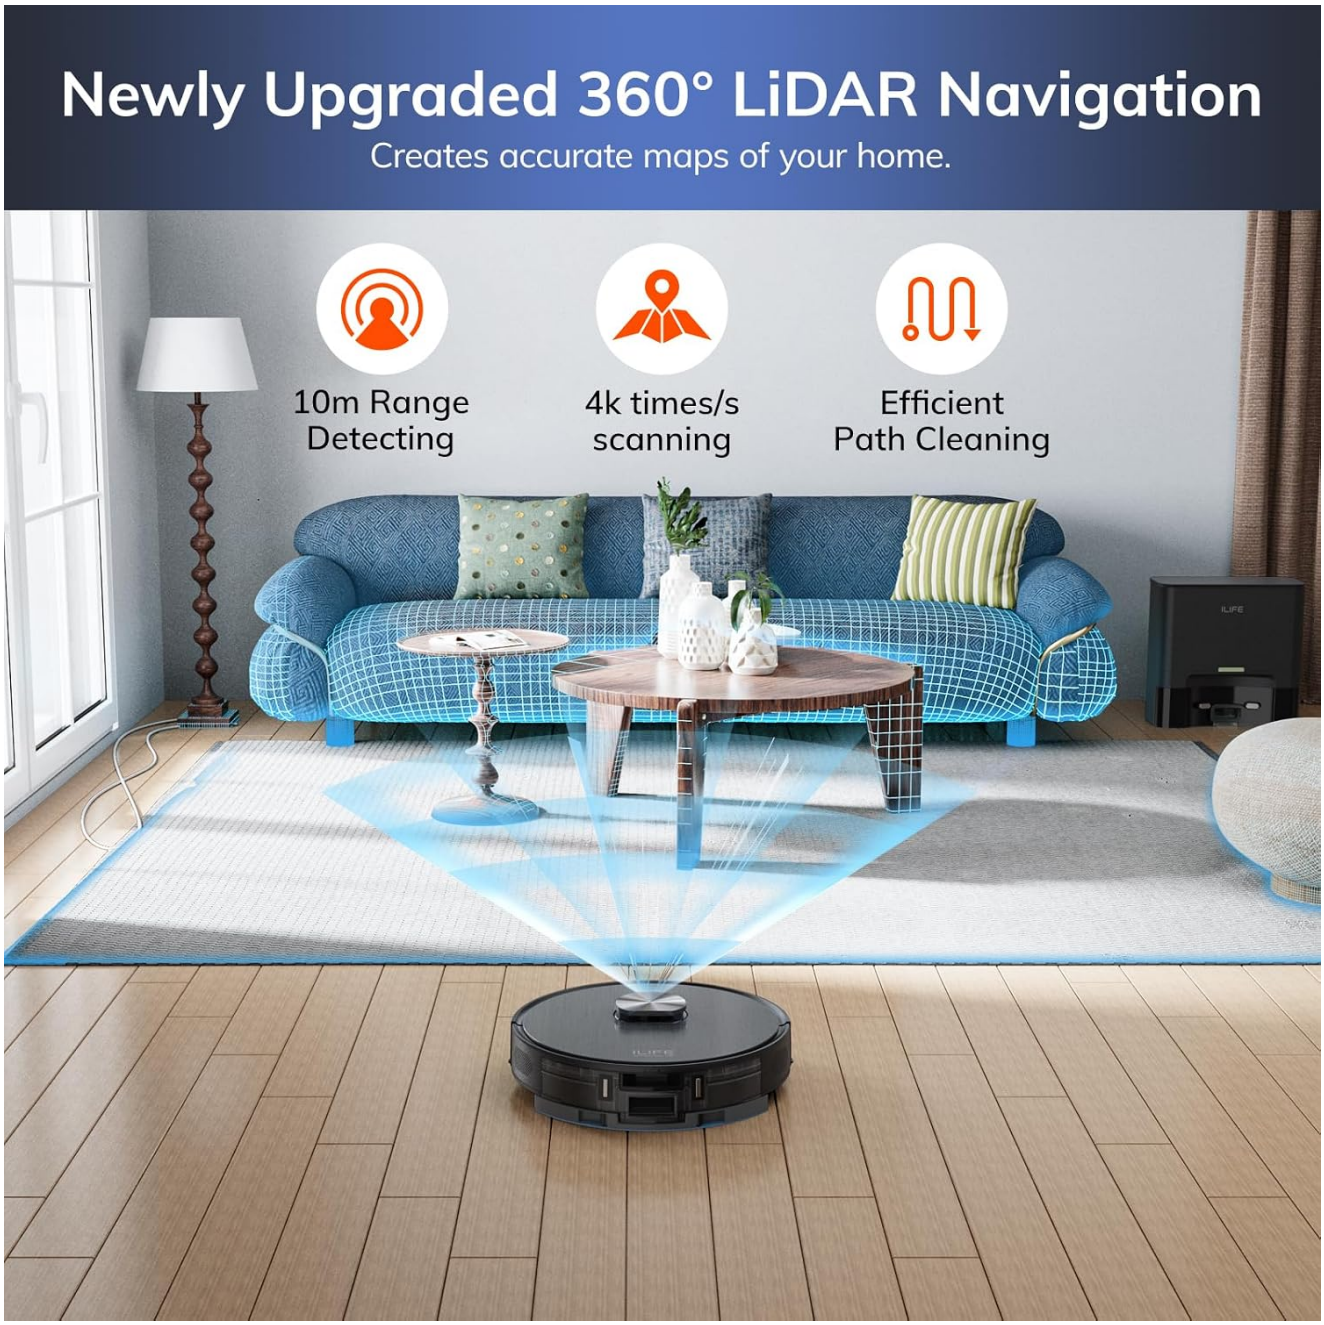


Figure 4: Robot Vacuum charging on station.

5.2 App Connection and Mapping

Download the **ILIFECLEAN App** from your smartphone's app store. Follow the in-app instructions to connect your robot to your 2.4GHz WiFi network. Once connected, the robot will perform an initial mapping run of your home to create an accurate floor plan. This map is crucial for efficient navigation and allows for advanced cleaning customization.



Figure 5: App interface for mapping and control.

6. Operating

6.1 Cleaning Modes

The ILIFE T20s offers versatile cleaning options:

- **Vacuum Only:** Ideal for dry debris and pet hair on all floor types.
- **Mop Only:** For light mopping of hard floors. Ensure the water tank is filled and mop pad attached.
- **Vacuum and Mop Combo:** Simultaneously vacuums and mops, reducing cleaning time. The 2-in-1 integrated tank allows for this combined function.



Figure 6: 3-in-1 Vacuum and Mop Combo.

6.2 Suction Power and Water Volume

Adjust suction power and water volume via the ILIFECLEAN App to suit different cleaning needs:

- **Suction Modes:** Silent (1000Pa), Standard (1500Pa), Power (2500Pa), and Maximum (5000Pa). The robot automatically increases suction on carpets.
- **Water Volume:** 3 adjustable levels for mopping, allowing customization for various floor types and cleaning requirements.



Figure 7: Suction Power Levels.

6.3 Scheduling and No-Go Zones

Use the ILIFECLEAN App to set custom cleaning schedules for different rooms or areas. You can also define "no-go zones" on the map to prevent the robot from entering specific areas, such as pet feeding areas or rooms with delicate items.



Figure 8: Scheduling and No-Go Zones in App.

6.4 Voice Control

The ILIFE T20s is compatible with Amazon Alexa and Google Home. Once integrated, you can control the robot using simple voice commands, such as "Alexa, turn on T20s" to start cleaning.

7. Maintenance

Regular maintenance ensures optimal performance and extends the lifespan of your ILIFE T20s.

7.1 Self-Emptying Station Dust Bag

The 3.5L dust bag in the self-empty station holds up to 70 days of dust and debris. Replace the dust bag when the indicator light on the station signals it is full, or as needed based on usage.



Figure 9: Self-Emptying Station Dust Bag.

7.2 Water Tank and Mop Pad

After each mopping session, empty any remaining water from the 2-in-1 integrated water tank and clean the mop pad. The mop pad can be hand-washed or machine-washed. Allow both to air dry completely before reattaching.

7.3 Brushes and Filters

Periodically inspect and clean the main brush and side brushes to remove tangled hair or debris. Clean the high-performance filter by tapping it gently to dislodge dust. Do not wash the filter with water. Replace filters and brushes as recommended in the app or when visibly worn.

8. Troubleshooting

Problem	Possible Cause	Solution
Robot not charging	Not properly aligned with charging contacts; power adapter unplugged.	Ensure robot is correctly placed on the station; check power connections.
Robot gets stuck frequently	Cables, small objects, or high thresholds.	Clear obstacles from the cleaning path; set no-go zones for problematic areas.
Poor cleaning performance	Full dustbin/dust bag; clogged filter; worn brushes.	Empty dustbin/replace dust bag; clean/replace filter and brushes.
App connection issues	Incorrect WiFi password; 5GHz WiFi network; weak signal.	Ensure correct 2.4GHz WiFi network and password; move router closer.

9. Specifications

Feature	Detail
Brand	ILIFE
Model Name	ILIFE T20s
Product Dimensions	13.19"L x 13.19"W x 3.74"H
Item Weight	22.7 pounds
Battery Life	260 minutes
Dust Bag Capacity	3.5 Liters (up to 70 days)
Suction Power	Up to 5000Pa
Navigation Type	LiDAR Navigation
Control Method	App, Voice (Alexa, Google Home)
Water Tank Capacity	200ml (integrated with 300ml dustbin)

10. Official Product Videos

Watch these official videos from ILIFE for more information on the T20s Robot Vacuum and Mop Combo.

Your browser does not support the video tag.

Video 1: ILIFE T20s Self-emptying Robot Vacuum Cleaner. This video provides an overview of the T20s features and operation.

11. Warranty and Support

The ILIFE T20s comes with a manufacturer's warranty. Please refer to the warranty card included in your package for specific terms and conditions. For technical support, troubleshooting assistance, or to inquire about replacement parts, please visit the official ILIFE website or contact their customer service. Contact information can typically be found on the ILIFE Official Store page on Amazon or within the ILIFECLEAN App.

ILIFE Official Store: Visit Store

© 2024 ILIFE. All rights reserved.