

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [LivePure](#) /

› [LivePure Bali Series Multi-Room Air Purifier LP560THP-BLK Instruction Manual](#)

LivePure LP560THP-BLK

LivePure Bali Series Multi-Room Air Purifier Instruction Manual

Model: LP560THP-BLK

Brand: LivePure

1. INTRODUCTION

The LivePure Bali Series Multi-Room Air Purifier, model LP560THP-BLK, is designed to improve indoor air quality. It features an automatic Air Quality Sensing System that adjusts fan speed based on detected air quality. The unit can purify air in spaces up to 2,600 sq ft per hour. Key features include a soft touch control panel, LED accent light, sleep timer, and a filter replacement indicator. This manual provides instructions for the safe and effective operation and maintenance of your air purifier.

Important Safety Instructions

- Read all instructions before operating the appliance.
- Place the air purifier on a firm, level surface.
- Do not operate the unit with a damaged cord or plug.
- Keep the power cord away from heated surfaces.
- Do not use the air purifier in wet or damp environments.
- Always unplug the unit before cleaning or performing any maintenance.

2. PRODUCT OVERVIEW

The LivePure Bali Series Air Purifier incorporates several features to ensure efficient air purification.

Key Features

- **Automatic Air Quality Sensing System:** Detects current air quality and adjusts fan speed accordingly.
- **Two-Stage Filtration:** Includes a Coconut Carbon Pre-Filter and an H13 True HEPA Filter.
- **High Efficiency:** Removes up to 99.97% of airborne particles as small as 0.3 microns.
- **Digital Controls & Remote:** Easy operation via touch panel or included remote control.
- **Multiple Fan Speeds:** Offers 4 fan speeds for customized air purification.

- **LED Accent Light:** Provides ambient lighting.
- **Sleep Timer:** Allows setting operation duration.
- **Filter Replacement Indicator:** Notifies when filters need changing.

Components and Controls



Figure 1: Control Panel Overview

This image displays the top control panel of the LivePure Bali Series Air Purifier, highlighting the functions of each button: Accent Light, Fan Speed, Timer, On/Off Power, Sleep Mode, Auto Mode, and Filter Indicator Light.

Two Stage Filtration



Pet Hair & Dander



Household Dust



Pollen



Mold Spores



Smoke & Odors



Bacteria

Coconut Carbon Pre-Filter

The pre-filter captures large particles, such as dust, pet dander, and pollen, from the air before they reach the HEPA filter.

Carbon pre-filter also helps reduce odors from the air caused by cooking, smoking, and pets.

True HEPA Filter

H13 True HEPA filter removes up to 99.97% of airborne particles as small as 0.3 microns - smoke, dust, pollen, pet hair and dander, mold spores and dust mites.



 LivePure®

Figure 2: Two-Stage Filtration System

This diagram illustrates the air purifier's two-stage filtration. The Coconut Carbon Pre-Filter captures large particles and reduces odors. The H13 True HEPA Filter removes up to 99.97% of airborne particles such as smoke, dust, pollen, pet dander, mold spores, and dust mites.

Air Quality Sensing System

Senses current air quality allowing the unit to automatically adjust the fan speed.



Figure 3: Air Quality Sensing System Indicators

This image shows the LED indicators for the Air Quality Sensing System. Green light indicates Excellent air quality (Low Fan Speed), Blue for Good (Medium Fan Speed), Orange for Fair (High Fan Speed), and Red for Poor (Turbo Fan Speed).

Captures up to 99.97% of particles from the air including smoke, pollen, dust, pet hair and dander, and bacteria.



Figure 4: Air Purification Process

This diagram illustrates how the air purifier captures various airborne particles, including smoke, pollen, dust, pet hair, dander, and bacteria, releasing cleaner air into the room.

Sleek and High-Performing

Cleans the air in a 200 sq. ft. room 13.5 times per hour



Figure 5: Product Dimensions

This image provides the key dimensions of the air purifier, showing a width of 20.6 inches and a height of 24.6 inches.

Room Size Chart

This chart indicates how many times per hour the air purifier exchanges the air within a room.



Energy Star Certified

This product has met strict federally mandated guidelines carried out by the EPA (Environmental Protection Agency). It is least 40% more energy-efficient than standard models. This means that an Energy Star-certified air purifier not only saves energy but also reduces greenhouse gas emissions.

Figure 6: Room Size Air Exchange Rate Chart

This chart indicates the number of times per hour the air purifier exchanges the air within various room sizes and types, such as bedrooms, kitchens, bathrooms, and living rooms.

Product Video

Your browser does not support the video tag.

Video 1: LivePure Brand Video

This video provides a general overview of LivePure products, including air purification and humidification solutions. It showcases various features and applications of LivePure devices.

3. SETUP

Unpacking and Placement

1. Carefully remove the air purifier from its packaging.
2. Remove all packaging materials, including any protective films or inserts.
3. Place the air purifier on a firm, level, and stable surface. Ensure there is at least 6 inches (15 cm) of space around the unit for proper air circulation.
4. Plug the power cord into a standard electrical outlet.

4. OPERATING INSTRUCTIONS

Power On/Off

- Press the **On/Off Power** button (refer to Figure 1) to turn the unit on or off.

Adjusting Fan Speed

- Press the **Fan Speed** button (refer to Figure 1) repeatedly to cycle through the 4 available fan speeds: Low, Medium, High, and Turbo.

Auto Mode

- Press the **Auto Mode** button (refer to Figure 1) to activate the automatic air quality sensing system. The unit will adjust its fan speed based on the detected air quality (refer to Figure 3).

Sleep Mode

- Press the **Sleep Mode** button (refer to Figure 1) to enter sleep mode. In this mode, the fan operates at a low speed, and the display lights dim for quiet operation.

Timer Function

- Press the **Timer** button (refer to Figure 1) to set the operating time. Each press will cycle through available timer settings (e.g., 2 hours, 4 hours, 8 hours). The unit will automatically turn off after the set time.

LED Accent Light

- Press the **Accent Light** button (refer to Figure 1) to turn the LED accent light on or off.

Remote Control

The included remote control allows you to operate all functions of the air purifier from a distance. Ensure the remote control has working batteries and is pointed towards the unit's sensor.

5. MAINTENANCE

Filter Replacement

The air purifier features a filter replacement indicator light that illuminates when it's time to change the filters. For optimal performance, replace filters regularly.


Easy Filter Change - LP560THP



1. Unplug the air purifier. Remove the front panel by pulling forward at the notches.



2. Remove the old filter from the unit by pulling the filter forward.

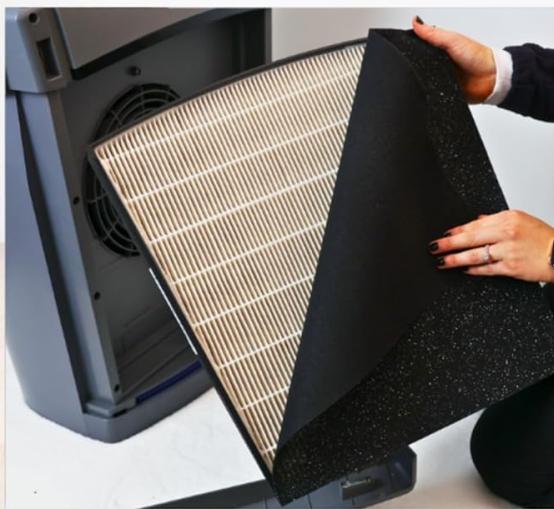

3. Insert the new pre-filter on the front of the HEPA filter and secure the pre-filter by pressing down on the velcro.



4. Place the new filter back into the unit, ensuring the pre-filter faces out. Place the front panel back on and press until it clicks in.

Figure 7: Easy Filter Change Guide

This visual guide demonstrates the four steps for replacing the filter: 1. Unplug the air purifier and remove the front panel. 2. Remove the old filter. 3. Insert the new pre-filter onto the HEPA filter. 4. Place the new filter assembly back into the unit and reattach the front panel.

1. **Unplug the Air Purifier:** Always disconnect the power cord from the electrical outlet before performing any maintenance.
2. **Remove the Front Panel:** Gently pull the front panel forward at the notches to detach it from the unit.
3. **Remove Old Filter:** Pull the old filter assembly (pre-filter and HEPA filter) forward and out of the unit.
4. **Prepare New Filter:** If replacing both, separate the old pre-filter from the old HEPA filter. Insert the new Coconut Carbon Pre-Filter onto the new H13 True HEPA Filter, ensuring it is securely attached, typically with velcro.
5. **Insert New Filter:** Place the new filter assembly back into the unit, ensuring the pre-filter faces outwards.
6. **Reattach Front Panel:** Align the front panel and press it firmly until it clicks into place.
7. **Reset Filter Indicator:** After replacing the filter, press and hold the **Filter Indicator Light** button (refer to Figure 1) for 3-5 seconds to reset the filter life counter.

Cleaning the Unit

- **Exterior Cleaning:** Wipe the exterior surfaces of the air purifier with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- **Air Inlet/Outlet Grilles:** Use a soft brush or vacuum cleaner with a brush attachment to gently clean dust from the air inlet and outlet grilles.
- **Internal Cleaning:** Do not attempt to clean the internal components of the air purifier beyond filter replacement.

6. TROUBLESHOOTING

If you encounter issues with your LivePure Bali Series Air Purifier, refer to the following table for common problems and solutions.

Problem	Possible Cause	Solution
Unit does not turn on.	No power supply.	Ensure the power cord is securely plugged into a working electrical outlet. Check the circuit breaker.
Airflow is weak or noisy.	Filters are clogged or incorrectly installed.	Check and replace filters if necessary (refer to Section 5). Ensure filters are installed correctly.
Air quality indicator light is always red/orange.	High level of pollutants detected.	Allow the unit to operate in Auto Mode for an extended period. Ensure no strong odors or pollutants are present near the sensor. Clean the sensor if accessible (refer to cleaning instructions).
Remote control not working.	Batteries are dead or incorrectly inserted. Obstruction between remote and unit.	Replace batteries with new ones, ensuring correct polarity. Remove any obstructions. Point the remote directly at the unit.

7. SPECIFICATIONS

Feature	Detail
Product Dimensions	20.75 x 12 x 24.5 inches
Item Weight	25.01 Pounds
Model Number	LP560THP-BLK
Brand Name	LivePure
Power Source	AC/DC
Control Method	Remote, Touch
Filter Type	HEPA
Floor Area Coverage	Up to 550 Square Feet (CADR rating) / Cleans over 2,600 sq ft per hour (based on 1 air change per hour)

Feature	Detail
UPC	810067453462

8. WARRANTY AND SUPPORT

Warranty Information

This LivePure Bali Series Air Purifier comes with a **1 Year Limited Warranty**. Please refer to the warranty card included with your product for full terms and conditions. Keep your proof of purchase for warranty claims.

Customer Support

For technical assistance, troubleshooting not covered in this manual, or warranty inquiries, please contact LivePure customer support. Contact information can typically be found on the LivePure website or on the product packaging.