



Manuals.plus /

› WODES /

› WODES Nordic Minimalist LED Pendant Light User Manual

WODES NM37

WODES Nordic Minimalist LED Pendant Light User Manual

Model: NM37

1. INTRODUCTION

Thank you for purchasing the WODES Nordic Minimalist LED Pendant Light. This manual provides essential information for the safe installation, operation, and maintenance of your new lighting fixture. Please read this manual thoroughly before installation and retain it for future reference.

2. SAFETY INFORMATION

WARNING: To avoid the risk of electric shock, always disconnect power at the circuit breaker or fuse box before beginning installation or performing any maintenance.

- All electrical connections must be in accordance with local codes, ordinances, or the National Electric Code (NEC).
- Consult a qualified electrician if you are unsure about the installation process.
- Do not install this fixture in wet or damp locations.
- Ensure the fixture is securely mounted to a structural element of the ceiling.
- Do not exceed the specified voltage range (90-260V).
- Handle the LED light source with care; avoid direct contact with the LED chips.

3. PACKAGE CONTENTS

Carefully unpack your fixture and check that all parts are included. If any parts are missing or damaged, do not attempt to assemble or install the product. Contact customer support for assistance.

- 1 x LED Pendant Light Fixture (Model NM37)
- Mounting Hardware (e.g., mounting bracket, screws, wire nuts)
- Instruction Manual (this document)

4. SETUP AND INSTALLATION

This fixture requires professional installation or installation by a person knowledgeable in electrical wiring.

1. Prepare for Installation:

- Turn off power at the main circuit breaker or fuse box.
- Ensure the mounting surface is clean, dry, and structurally sound.
- Gather necessary tools (e.g., screwdriver, wire strippers, drill, ladder).

2. Mounting the Fixture:

Attach the mounting bracket to the junction box in the ceiling using the provided screws. Ensure it is securely fastened.

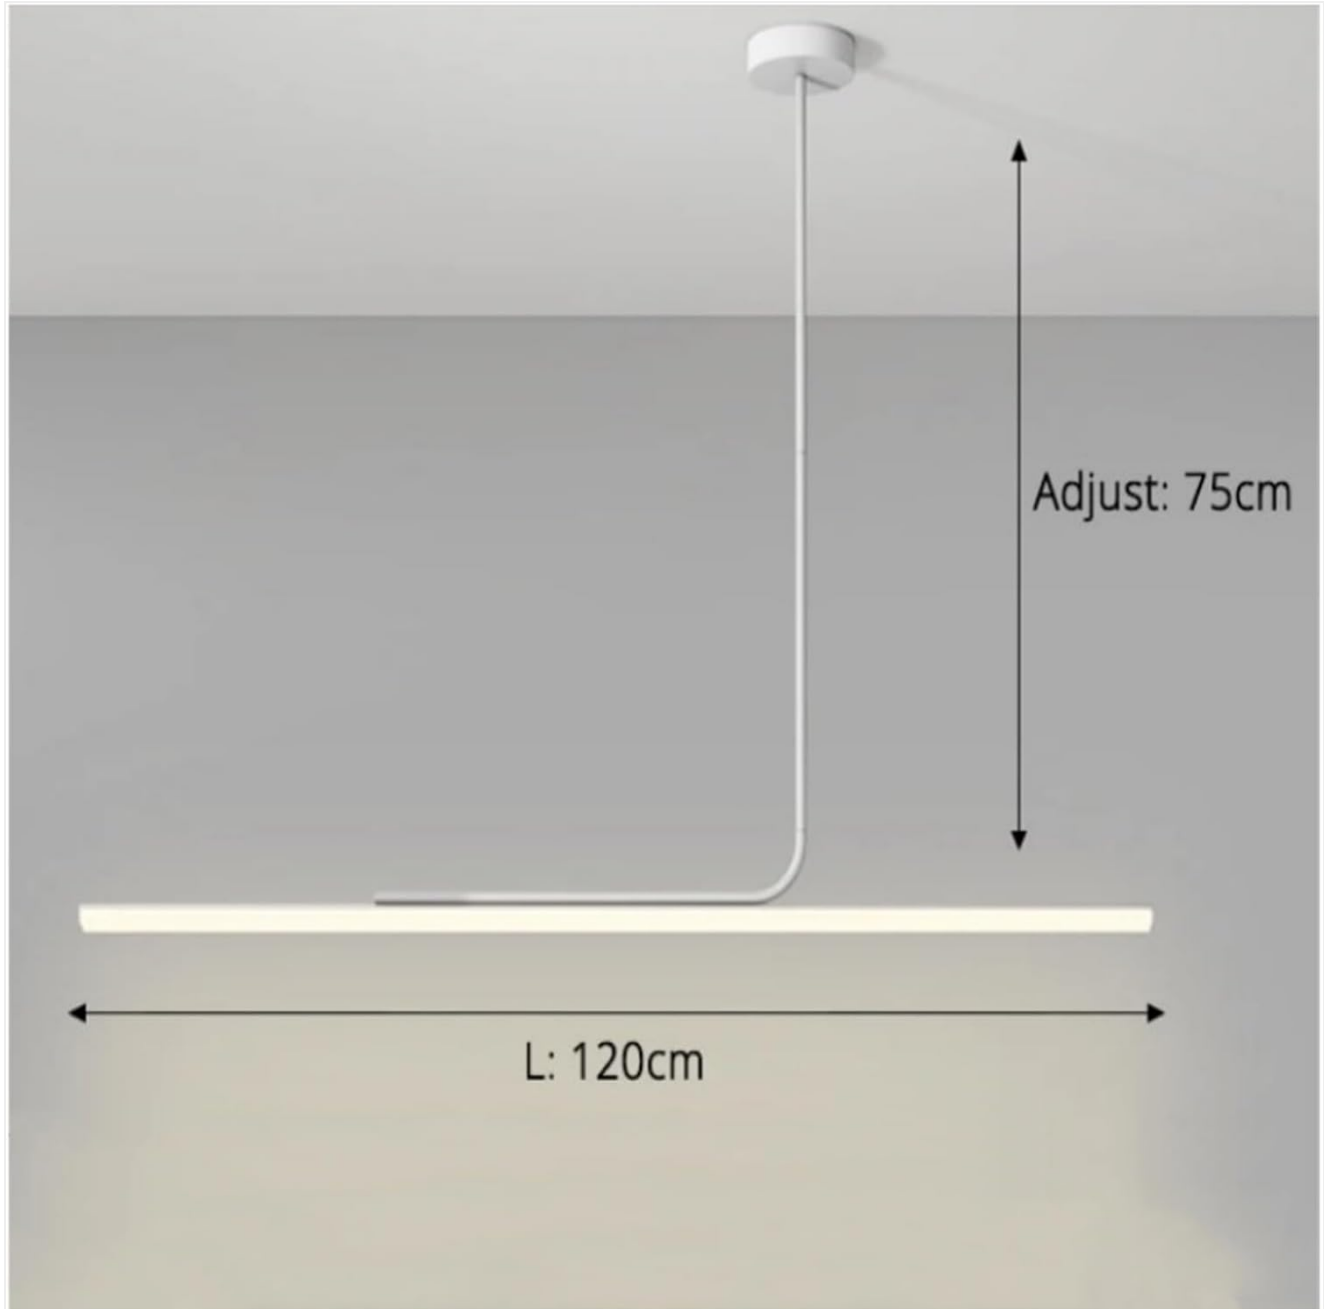


Image: Dimensions of the pendant light. The light bar measures 120cm in length, and the hanging wire is adjustable up to 75cm from the ceiling canopy.

3. Wiring Connections:

- Connect the fixture's live (black) wire to the house's live (black) wire.
- Connect the fixture's neutral (white) wire to the house's neutral (white) wire.
- Connect the fixture's ground (green or bare copper) wire to the house's ground wire and the mounting bracket.
- Secure all connections with wire nuts and electrical tape.

4. Securing the Fixture:

Carefully tuck all wires into the junction box. Attach the fixture canopy to the mounting bracket, securing it with the provided

screws or nuts.



Image: The WODES Nordic Minimalist LED Pendant Light, 120cm black version, installed above a dining table, demonstrating its modern and clean appearance.

5. Final Check:

Ensure all connections are secure and the fixture is firmly attached to the ceiling. Restore power at the circuit breaker.

5. OPERATING INSTRUCTIONS

Once properly installed and wired, the WODES Nordic Minimalist LED Pendant Light operates like any standard light fixture. Use a compatible wall switch to turn the light on or off. This fixture is designed for daily lighting and provides a soft, energy-efficient illumination.



Image: A detailed view of the integrated LED light source within the pendant light's linear design, highlighting its seamless illumination.

6. MAINTENANCE

To ensure the longevity and optimal performance of your pendant light, follow these maintenance guidelines:

- **Cleaning:** Before cleaning, ensure the power is turned off at the circuit breaker. Use a soft, dry, or slightly damp cloth to wipe the fixture. Do not use abrasive cleaners, solvents, or polishes as they may damage the finish or electrical components.
- **LED Light Source:** The LED light source is integrated and not user-replaceable. Do not attempt to disassemble the LED module.
- **Regular Inspection:** Periodically check the fixture for any loose connections or signs of wear. If any issues are observed, consult a qualified electrician.

7. TROUBLESHOOTING

If you encounter issues with your pendant light, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	<ul style="list-style-type: none"> No power to the fixture. Loose wire connections. Faulty wall switch. 	<ul style="list-style-type: none"> Check circuit breaker or fuse. Ensure all wire connections are secure (power off first). Test or replace the wall switch.
Light flickers.	<ul style="list-style-type: none"> Loose wire connections. Incompatible dimmer switch (if applicable). 	<ul style="list-style-type: none"> Check and secure all wire connections (power off first). Ensure dimmer switch is compatible with LED fixtures.
Light is dim.	<ul style="list-style-type: none"> Voltage drop. Dust accumulation on LED. 	<ul style="list-style-type: none"> Consult an electrician to check wiring. Clean the LED surface gently.

If the problem persists after attempting these solutions, please contact customer support.

8. SPECIFICATIONS

Item Type	Pendant Light
Model Number	NM37
Brand	WODES
Voltage	90-260V
Material	Aluminum
Lighting Area	5-10 square meters
Dimensions (Length)	120cm (as per image)
Adjustable Hanging Wire	Up to 75cm (as per image)
Item Weight	1.76 ounces
Assembly Required	No (for the fixture itself, installation is required)
Finish Type	Matte
Country of Origin	China

9. WARRANTY AND SUPPORT

WODES products are manufactured to high-quality standards. For warranty information, please refer to the warranty card included with your purchase or visit the official WODES website. For technical support, replacement parts, or any questions regarding your product, please contact WODES customer service through the retailer where the product was purchased or via the contact information provided on the official WODES website.

Please retain your proof of purchase for warranty claims.

