Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

APBEAMLighting APB-1016-19746-260812

APBEAMLighting 52-Inch Farmhouse Ceiling Fan with Lights and Remote Control User Manual

Model: APB-1016-19746-260812

1. Introduction

Thank you for choosing the APBEAMLighting 52-Inch Farmhouse Ceiling Fan. This manual provides detailed instructions for the safe installation, operation, and maintenance of your new ceiling fan. Please read this manual thoroughly before installation and keep it for future reference.



Image: The APBEAMLighting 52-inch Farmhouse Ceiling Fan, featuring a matte black finish, walnut wood blades, and a caged light fixture with bubble glass shade.

2. Safety Information

To reduce the risk of electric shock, fire, or personal injury, always follow these basic safety precautions:

- Read all instructions before installing the fan.
- Ensure the installation site is structurally sound and can support the fan's weight (approximately 18.3 lbs / 8.3 kg).
- All wiring must be in accordance with national and local electrical codes. Consult a qualified electrician if you are unsure.
- Turn off power at the circuit breaker or fuse box before beginning installation or performing any maintenance.
- Do not operate the fan with damaged wiring or if any parts are missing or damaged.
- Keep hands, clothing, and other objects clear of the fan blades when the fan is operating.
- This fan is designed for indoor use only.

3. Package Contents

Verify that all components are present before beginning installation:

- Mounting Hardware
- Remote Control
- Seeded Glass Shade
- Fan Motor Assembly
- Fan Blades (5)
- Downrods (2 options: 4.92 inches and 7.87 inches)

4. Setup and Installation

Professional installation is recommended. Ensure power is disconnected before installation.

4.1. Pre-Installation Steps

1. Unpack all components and inspect for any damage.
2. Turn off power at the main circuit breaker.
3. Identify the mounting location and ensure it can support the fan.

4.2. Assembling the Downrod and Canopy

Attach the chosen downrod to the fan motor assembly, ensuring all screws are securely tightened. Slide the canopy over the downrod.

▶ **Watch video online**
How to Install a 52 Inch Industrial Ceiling Fan

Video: Detailed instructions on how to assemble the downrod and canopy for the ceiling fan.

4.3. Mounting Options

This fan supports both flat and sloped ceiling installations (for slopes less than 22 degrees).

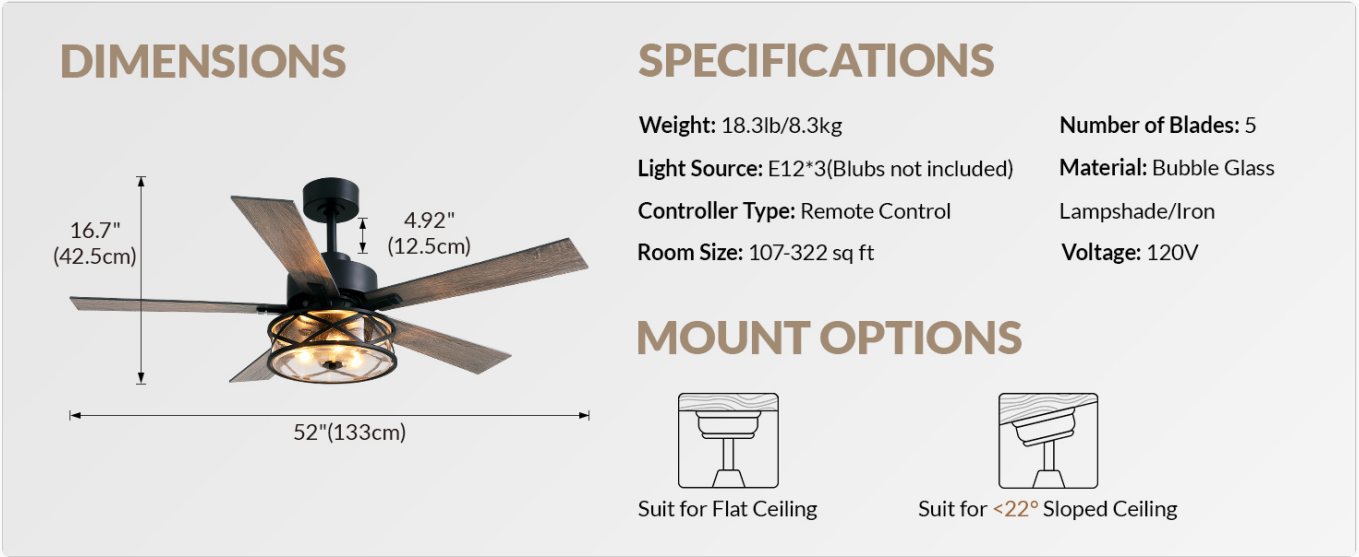

Image: Diagram illustrating suitable mounting for flat ceilings and sloped ceilings (less than 22 degrees).

4.4. Blade Installation

Attach the five fan blades to the motor housing using the provided screws. The blades are reversible, offering two color options (walnut and a lighter wood grain) to match your decor.



Image: Illustration of the reversible fan blades, showing Side-A (lighter wood) and Side-B (darker walnut) options.

4.5. Light Fixture Installation

Install three E12 base bulbs (not included) into the sockets. Then, attach the bubble glass shade and the metal cage to the fan motor assembly.

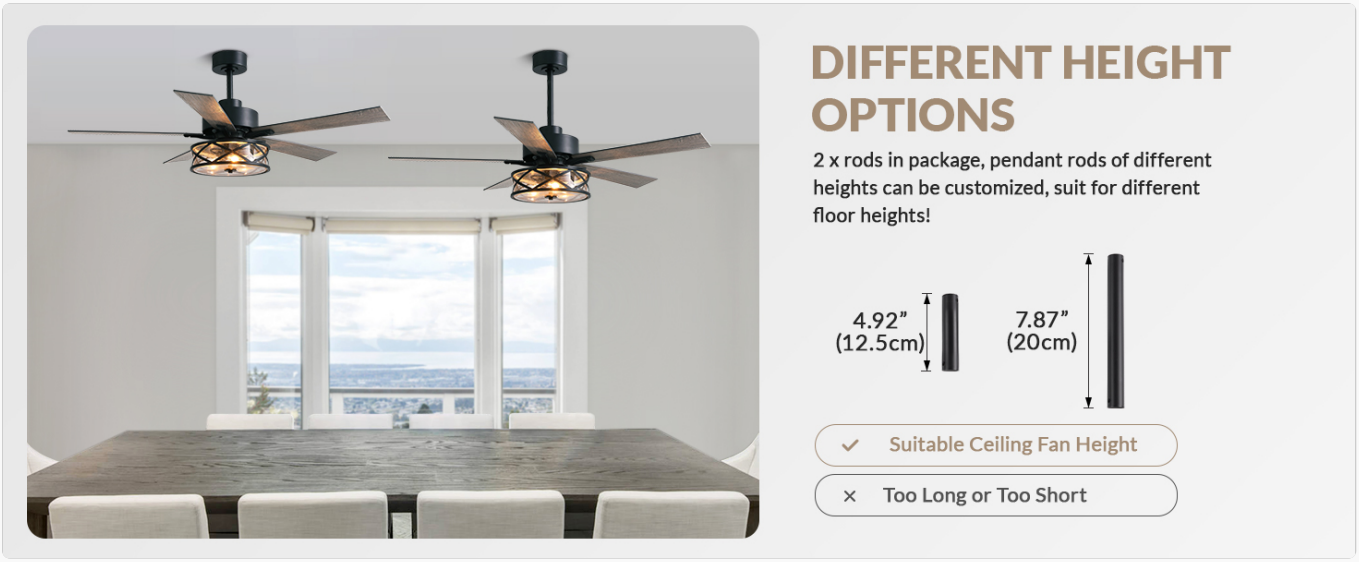

Image: Detailed view of the three E12 lamp sockets and the distinctive bubble glass lampshade.

5. Operating Instructions

Your ceiling fan is controlled by the included remote control. Ensure the remote has working batteries (not included).

5.1. Remote Control Functions

- **ALL OFF:** Turns off both the fan and light.
- **LIGHT ON/OFF:** Toggles the light on or off.
- **F (Forward Rotation):** Sets the fan to downdraft mode for cooling in summer.
- **R (Reverse Rotation):** Sets the fan to updraft mode for improved air circulation in winter.
- **Natural Wind:** Simulates a natural breeze by varying fan speeds.

- **1-6 (Fan Speeds):** Adjusts the fan speed from 1 (lowest) to 6 (highest).
- **1H / 2H / 4H (Timer):**Sets the fan to turn off automatically after 1, 2, or 4 hours.



Image: Diagram of the remote control, highlighting buttons for fan speed, rotation direction, timer, and light control.

5.2. Fan Speed Settings

The fan offers 6 speeds to suit various needs:

- **Low Speed (1-2):** Gentle wind, suitable for sleeping.
- **Medium Speed (3-4):** Natural wind, suitable for working or entertainment.
- **High Speed (5-6):** Cool wind, suitable for quickly cooling a room.

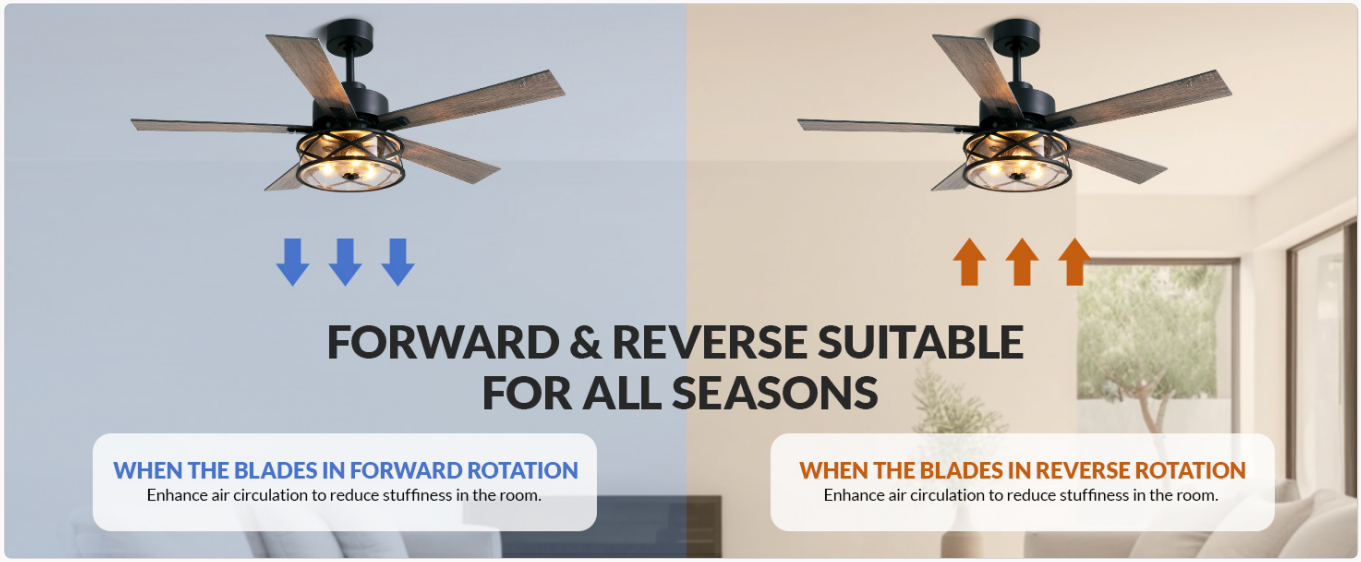

Image: Visual representation of the three fan speed categories (Low, Medium, High) and their recommended uses.

5.3. Seasonal Operation (Forward/Reverse)

The fan features a reversible motor for year-round comfort:

- **Summer Mode (Forward Rotation):** Blades rotate counter-clockwise, pushing air downwards to create a cooling effect.
- **Winter Mode (Reverse Rotation):** Blades rotate clockwise, drawing air upwards to circulate warm air trapped near the ceiling.

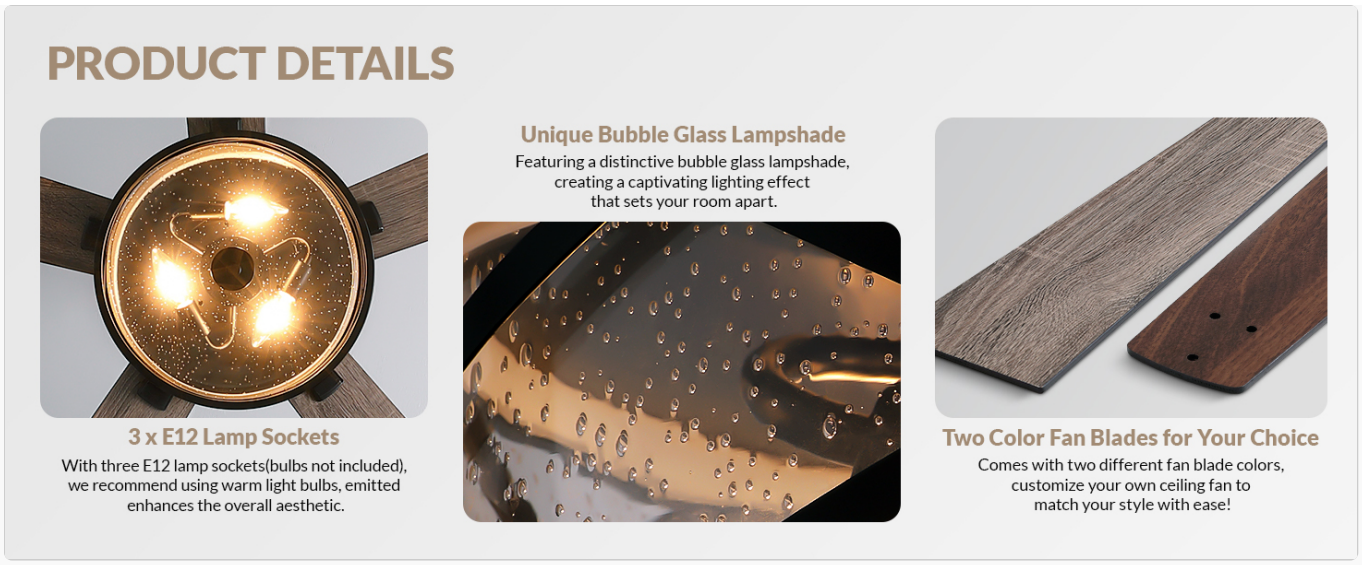

Image: Visual guide demonstrating the forward rotation (downdraft) for hot days and reverse rotation (updraft) for cold days.

6. Maintenance

Regular maintenance ensures optimal performance and extends the life of your ceiling fan.

- **Cleaning:** Periodically clean the fan blades and motor housing with a soft, damp cloth. Do not use abrasive cleaners or solvents.
- **Tightening Screws:** Check all screws and connections annually to ensure they are secure.
- **Light Bulbs:** Replace E12 bulbs as needed. Ensure power is off before changing bulbs.
- **Blade Balance:** If the fan wobbles, check that all blades are securely attached and balanced. A balancing kit (not included) can be used if necessary.

Always disconnect power before performing any cleaning or maintenance.

7. Troubleshooting

Problem	Possible Cause	Solution
Fan does not start	No power to the fan; Loose wire connections; Remote control battery low/dead.	Check circuit breaker/fuse; Verify all wire connections are secure; Replace remote control batteries.
Light does not work	Bulbs are faulty or not installed correctly; Loose wire connections; Light switch off.	Replace bulbs and ensure they are screwed in tightly; Check light fixture wiring; Ensure light switch is on.
Fan wobbles	Loose blade screws; Unbalanced blades; Loose mounting bracket.	Tighten all blade screws; Use a balancing kit to balance blades; Ensure mounting bracket is securely fastened to the ceiling.
Noisy operation	Loose screws; Blades hitting an obstruction; Motor issues.	Check and tighten all screws; Ensure nothing is obstructing the blades; If noise persists, contact customer support.

Problem	Possible Cause	Solution
Remote control not working	Dead batteries; Remote not paired; Obstruction between remote and receiver.	Replace batteries; Refer to remote pairing instructions (if applicable); Ensure clear line of sight to fan receiver.

If you encounter issues not listed here or if the problem persists after attempting solutions, please contact APBEAMLighting customer support.

8. Specifications

Feature	Detail
Brand	APBEAMLighting
Model Number	APB-1016-19746-260812
Size	52 Inch
Material	Iron, Metal, Wood (Blades)
Style	Farmhouse, Industrial, Retro
Room Type	Bedroom, Dining Room, Living Room
Indoor/Outdoor Usage	Indoor
Power Source	DC
Control Method	Remote Control
Light Source	Incandescent, LED, CFL (Bulbs not included)
Bulb Base	E12 (3 sockets)
Voltage	120 volts
Wattage	60 watts
Light Output Maximum	1350 lumens
Weight	18.3 lbs / 8.3 kg
Mounting Type	Downrod mount (Flat or <22° Sloped Ceiling)



Image: Visual representation of the fan's dimensions and key specifications.

9. Warranty and Support

This APBEAMLighting product comes with a 2-year manufacturer's warranty. For warranty claims, technical assistance, or any product-related inquiries, please contact APBEAMLighting customer support.

For further assistance, please visit the APBEAMLighting Store on Amazon.

© 2026 APBEAMLighting. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CWG7VP58

More documents and user manuals: **https://manuals.plus/**