

Manuals.plus /

- › GAMEPOWER /
- › GAMEPOWER Gasket Pro 75% Mechanical Gaming Keyboard User Manual

GAMEPOWER GASKETPROBLUE

GAMEPOWER Gasket Pro 75% Mechanical Gaming Keyboard User Manual

Model: GASKETPROBLUE

1. INTRODUCTION

Thank you for choosing the GAMEPOWER Gasket Pro 75% Mechanical Gaming Keyboard. This manual provides detailed instructions for setting up, operating, and maintaining your keyboard. Featuring a compact 75% layout with 81 keys, triple connectivity modes (Wired, 2.4GHz, Bluetooth 5.1), a customizable LCD screen, RGB backlighting, and durable Blue switches, this keyboard is designed for enhanced productivity and gaming performance.



Image 1.1: Top-down view of the GAMEPOWER Gasket Pro 75% Mechanical Gaming Keyboard with RGB backlighting enabled.

2. PACKAGE CONTENTS

Please verify that all items are present in your package:

- GAMEPOWER Gasket Pro 75% Mechanical Gaming Keyboard
- USB-C Cable
- 2.4GHz Wireless Dongle
- Keycap Puller
- Stickers
- User Manual (this document)

3. SETUP

3.1 Initial Charging

Before first use, it is recommended to fully charge the keyboard. Connect the supplied USB-C cable to the keyboard's USB-C port and the other end to a powered USB port on your computer or a USB wall adapter. The LCD screen will indicate charging status.

3.2 Connectivity Options

The keyboard supports three connection modes: Wired, 2.4GHz Wireless, and Bluetooth 5.1.

1. **Wired Mode:** Connect the USB-C cable directly from the keyboard to your computer. The keyboard will automatically switch to wired mode.
2. **2.4GHz Wireless Mode:** Insert the 2.4GHz USB dongle into an available USB port on your computer. On the keyboard, press **Fn + R** to activate 2.4GHz mode. The LCD screen will display the 2.4G icon.
3. **Bluetooth 5.1 Mode:**
 - Press **Fn + Q**, **Fn + W**, or **Fn + E** to select one of three Bluetooth channels (BT1, BT2, BT3).
 - Hold the selected **Fn + Q/W/E** key combination for 3-5 seconds until the corresponding Bluetooth indicator on the LCD screen flashes, indicating pairing mode.
 - On your device (computer, tablet, smartphone), search for Bluetooth devices and select "GAMEPOWER Gasket Pro" to connect. The indicator will stop flashing once connected.



Image 3.1: Illustration of the keyboard's triple connectivity modes: USB-C wired, 2.4G wireless (FN+R), and Bluetooth (FN+Q/W/E).

4. OPERATING INSTRUCTIONS

4.1 LCD Screen Functions

The 0.85-inch LCD screen provides real-time information and customization options. Use the rotary knob to navigate and select settings.

- **Default Display:** Shows date, time, battery level, and current connection mode.
- **Navigation:** Rotate the knob to scroll through options. Press the knob to confirm a selection.
- **Settings:** Access options for connectivity, RGB effects, brightness, and color customization directly from the screen.

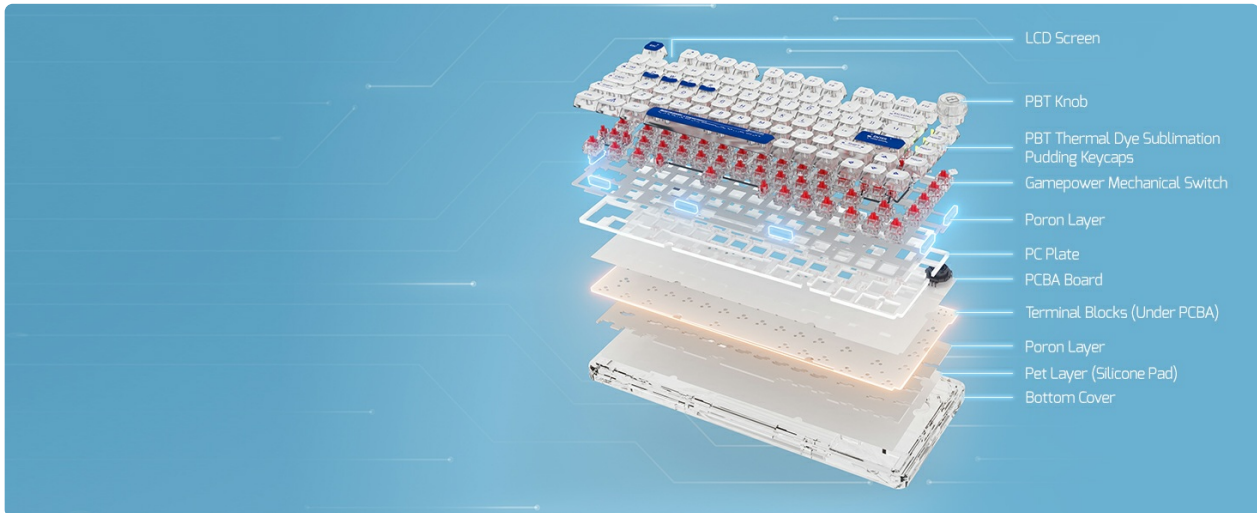


Image 4.1: Close-up of the keyboard's LCD screen displaying various settings such as connection mode, RGB effects, brightness, and color options.

4.2 Customizable RGB Backlighting

The keyboard features per-key RGB backlighting. You can customize lighting effects, colors, and brightness directly from the keyboard using function key combinations or through the dedicated software.

- **On-Keyboard Control:** Refer to the keyboard's quick guide for specific Fn key combinations to cycle through effects and adjust brightness/color.
- **Software Customization:** For advanced customization, including per-key lighting and custom profiles, download the GAMEPOWER software from the official website.



Image 4.2: The keyboard showcasing its vibrant RGB backlighting, highlighting the customizable illumination features.

4.3 Macro Settings

The GAMEPOWER Gasket Pro keyboard supports macro programming to streamline complex commands. This feature is primarily managed through the GAMEPOWER software, allowing you to assign custom

shortcuts for gaming or business applications.

4.4 Knob Control

The multi-function knob located on the top right of the keyboard provides intuitive control over various settings, including volume adjustment and navigation within the LCD screen menu.

- **Volume Control:** Rotate the knob to increase or decrease system volume.
- **Mute/Unmute:** Press the knob to mute or unmute audio.
- **LCD Navigation:** When the LCD screen is active, rotate the knob to scroll through options and press to select.



Image 4.3: Detailed view of the multi-function knob, illustrating its integration and control capabilities for the LCD display and audio.

4.5 Keycaps and Switches

The keyboard features transparent pudding keycaps with Thermal DYE Sublimation technology, offering a unique aesthetic and durable legends. It is equipped with 60M click lifespan Linear Blue mechanical switches, providing a tactile and audible typing experience.

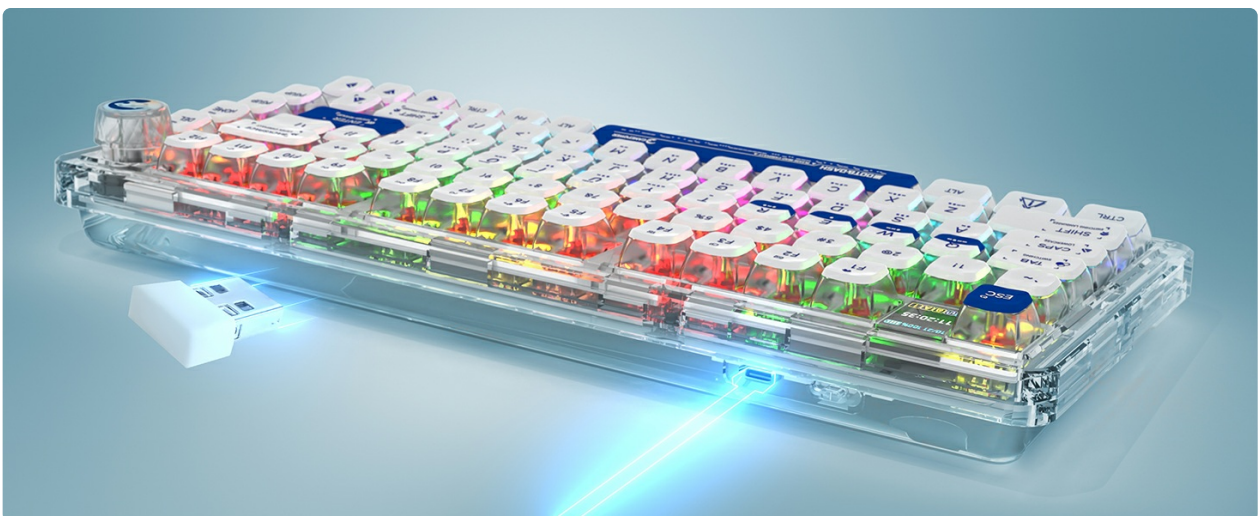


Image 4.4: Close-up of the transparent pudding keycaps, highlighting the thermal dye sublimation process for durable legends.



Image 4.5: Exploded view of a mechanical switch, illustrating its internal components and design.

5. MAINTENANCE

5.1 Cleaning

To clean your keyboard, disconnect it from all power sources. Use a soft, dry cloth to wipe the surface. For deeper cleaning, use a keycap puller to remove keycaps and a can of compressed air to clear debris from between switches. Avoid using harsh chemicals or abrasive materials.

5.2 Battery Care

The keyboard contains a built-in Lithium Polymer battery. To prolong battery life, avoid exposing the keyboard to extreme temperatures. If storing for an extended period, charge the battery to approximately 50% and store in a cool, dry place.

6. TROUBLESHOOTING

- **Keyboard not responding:** Ensure the keyboard is charged. Check the connection mode (Wired, 2.4GHz, Bluetooth) and ensure it matches your device's connection. For 2.4GHz, ensure the dongle is properly inserted. For Bluetooth, re-pair the device.
- **RGB lights not working:** Check if RGB is enabled via the LCD screen or software. Ensure brightness is not set to zero.
- **LCD screen is blank:** Ensure the keyboard is powered on and charged. If the issue persists, try restarting the keyboard.
- **Keys not registering:** Ensure the keyboard is clean and free of debris. If specific keys are not working, contact customer support.

7. SPECIFICATIONS

Feature	Detail
Model Number	GASKETPROBLUE
Layout	75% (81 Keys)
Connectivity	Wired (USB-C), 2.4GHz Wireless, Bluetooth 5.1
Switches	Linear Blue Mechanical Switches (60M Click Lifespan)
Keycaps	Transparent Pudding Keycaps with Thermal DYE Sublimation
Backlighting	Customizable RGB
Display	0.85-inch LCD Screen
Battery	Lithium Polymer (included)
Anti-Ghosting	100%
Material	Acrylonitrile Butadiene Styrene
Item Weight	3.5 pounds
Package Dimensions	16.61 x 7.32 x 2.52 inches
Compatible Devices	Gaming Console, Laptop, PC, Smart TV, Smartphone

8. WARRANTY AND SUPPORT

The GAMEPOWER Gasket Pro Mechanical Gaming Keyboard comes with a manufacturer's warranty. For detailed warranty information, product support, software downloads, and frequently asked questions, please visit the official GAMEPOWER website or contact their customer service. Keep your purchase receipt as proof of purchase for warranty claims.

For further assistance, please visit: [GAMEPOWER Store on Amazon](#)