

RL LIVE YOUR LIGHT R27759132

Reality Leuchten Talent R27759132 LED Wall Lamp

User Instruction Manual

1. PRODUCT OVERVIEW

The Reality Leuchten Talent R27759132 is a versatile, rechargeable LED wall lamp designed for both indoor and outdoor use. It features a matte black finish, a magnetic wall mount for easy installation, and offers adjustable up and down lighting. Equipped with both motion and dusk sensors, this lamp provides intelligent illumination, automatically adapting to your needs and environment.



Figure 1: Front view of the Reality Leuchten Talent R27759132 LED Wall Lamp.



Figure 2: The Talent wall lamp installed, showcasing its magnetic attachment and various lighting effects.

2. SAFETY INSTRUCTIONS

- Read all instructions carefully before installation and use.
- Keep the product away from water and moisture unless specifically rated for wet environments. This product has an IP44 rating, making it suitable for outdoor use where it may encounter splashes, but it should not be submerged.
- Do not attempt to disassemble or modify the lamp beyond what is described in this manual.
- Use only the provided USB-C cable for charging.
- Ensure the magnetic mount is securely fastened to a stable surface before attaching the lamp.
- Avoid direct eye exposure to the LED light source.
- Dispose of the product and its battery responsibly according to local regulations.

3. PACKAGE CONTENTS

Please check the package for the following items:

- 1 x Reality Leuchten Talent R27759132 LED Wall Lamp
- 1 x Magnetic Wall Mount

- 1 x USB-C Charging Cable
- 1 x User Manual (this document)

4. SETUP AND INSTALLATION

4.1 Dimensions

The lamp has compact dimensions, making it suitable for various spaces.


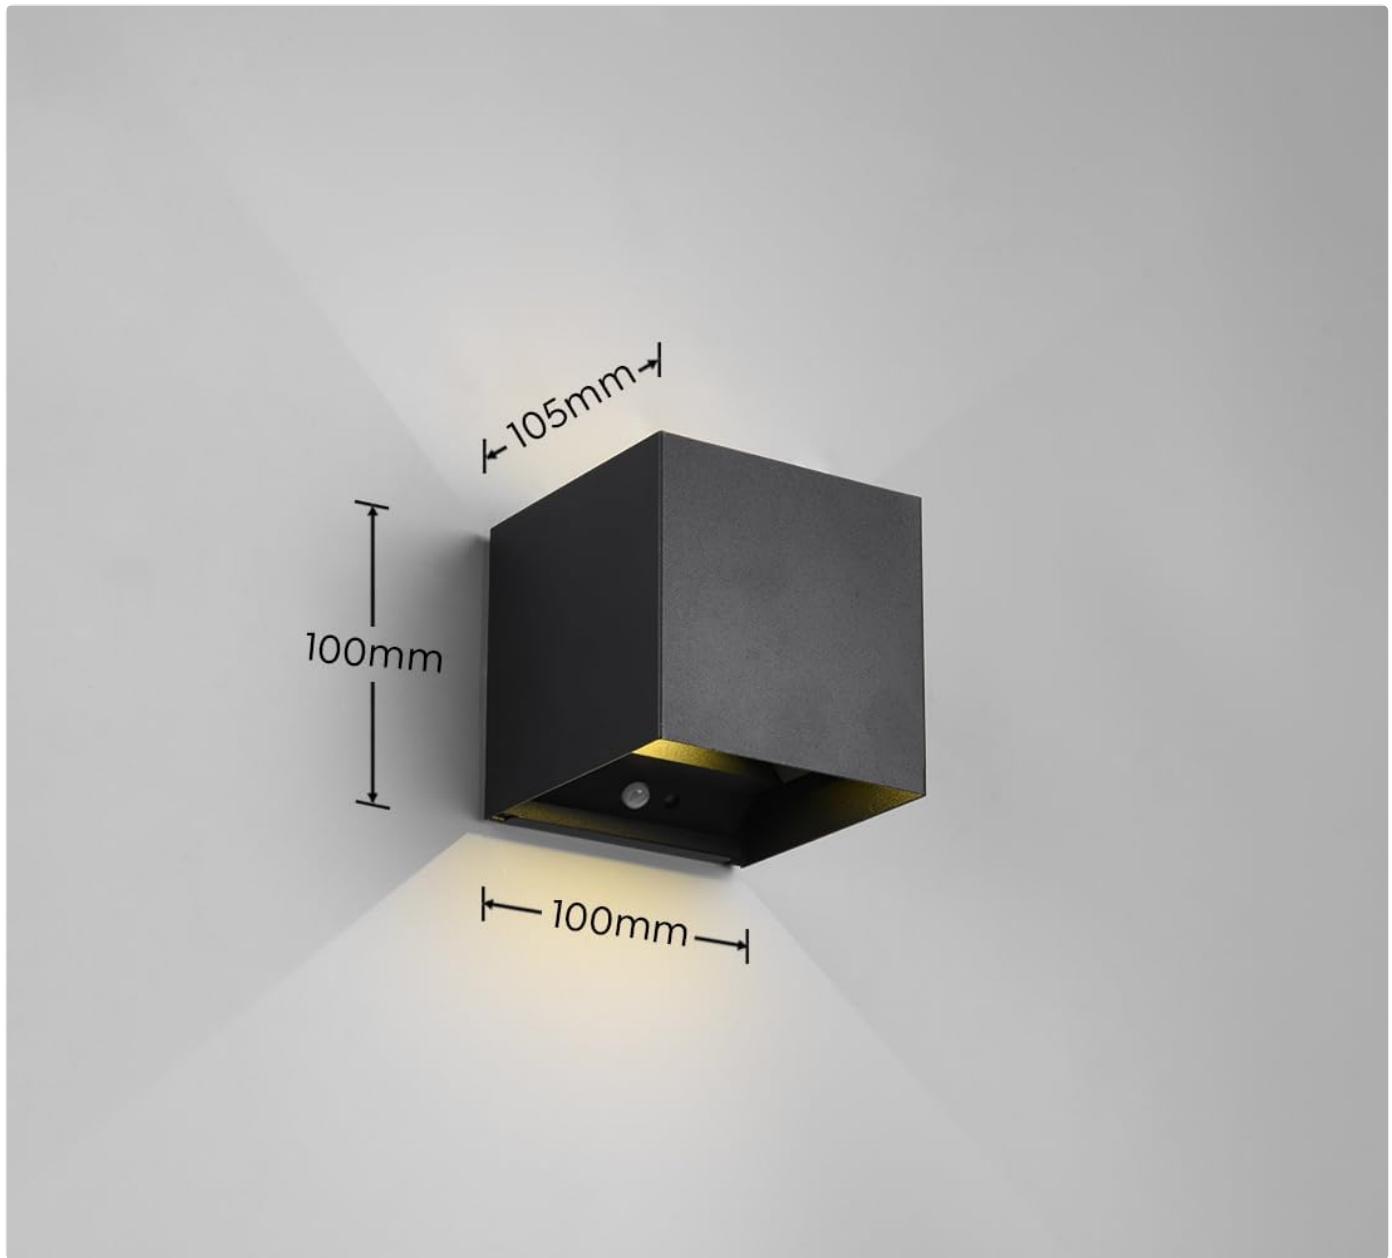


Figure 3: Product dimensions (Width: 100mm, Depth: 100mm, Height: 105mm).

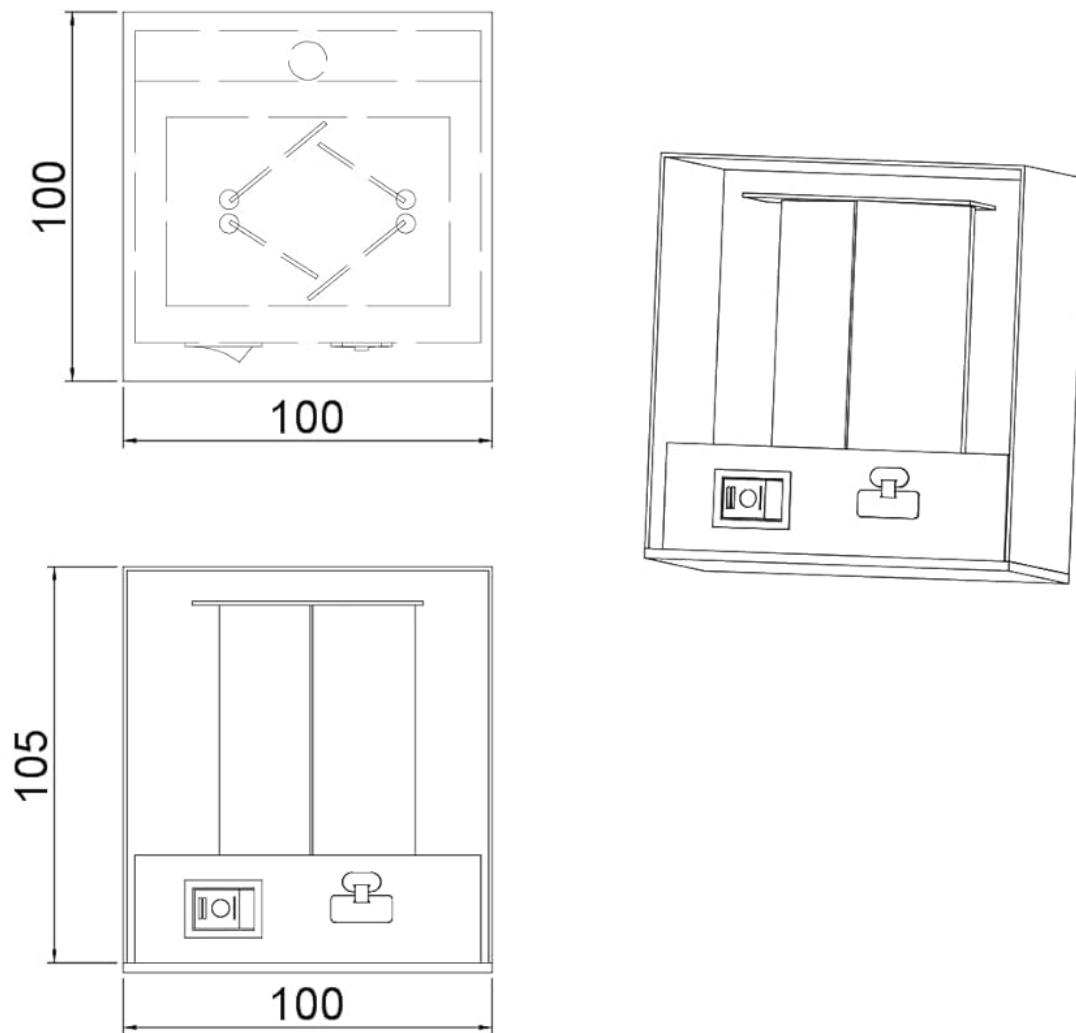

R277591XX

Figure 4: Technical drawing illustrating the lamp's structure and dimensions.

4.2 Mounting the Lamp

The Talent wall lamp utilizes a magnetic mounting system for easy attachment and removal.

- 1. Choose a Location:** Select a suitable location on a wall, ensuring it is clean and dry. The lamp is rated IP44, making it suitable for both indoor and outdoor use.
- 2. Install the Magnetic Mount:** Secure the magnetic wall mount to the desired surface using appropriate screws (not included) through the designated holes. Ensure the mount is level and firmly attached.



Figure 5: The magnetic wall mount plate.



Figure 6: Front view of the magnetic wall mount, showing screw holes.

3. Attach the Lamp: Align the back of the lamp with the magnetic mount. The lamp will snap into place securely.



live your light



Figure 7: The lamp is suitable for both indoor and outdoor environments.

5. OPERATING INSTRUCTIONS

The Talent wall lamp offers two distinct operating modes, selectable via a switch located inside the lamp housing.



Figure 8: Internal view of the lamp, showing the power switch.



Figure 9: Close-up of the mode selection switch.

5.1 Mode Selection

To access the mode selection switch, gently detach the lamp from its magnetic mount. The switch has three positions:

- **Position 'I' (Motion Sensor Mode):** In this mode, the lamp will activate when motion is detected within its sensor range. It will turn off automatically after a period of no motion.
- **Position 'II' (Dusk Sensor Mode):** In this mode, the lamp will automatically turn on when the ambient light level falls below a certain threshold (i.e., at dusk or in darkness) and remain on until sufficient light is detected.
- **Center Position (Off):** The lamp is turned off.

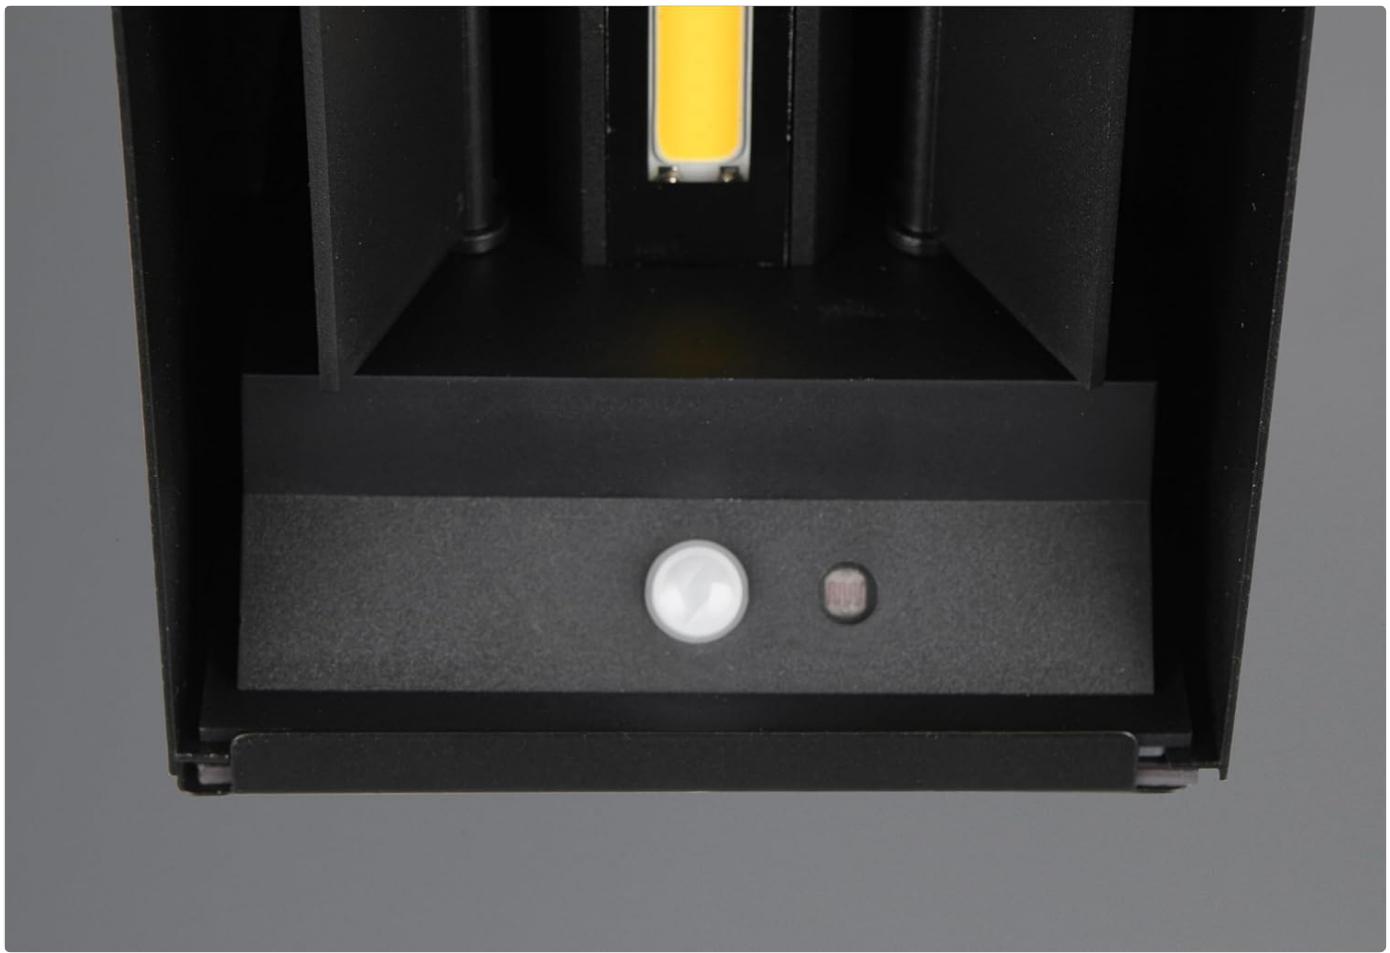


Figure 10: Location of the motion and dusk sensors.

5.2 Adjustable Light Angle

The lamp provides both up and down lighting. The angle of the light can be adjusted to suit your preference, creating various lighting effects.



Figure 11: Example of adjustable up and down lighting.



Figure 12: Lamp demonstrating both up and down light emission.

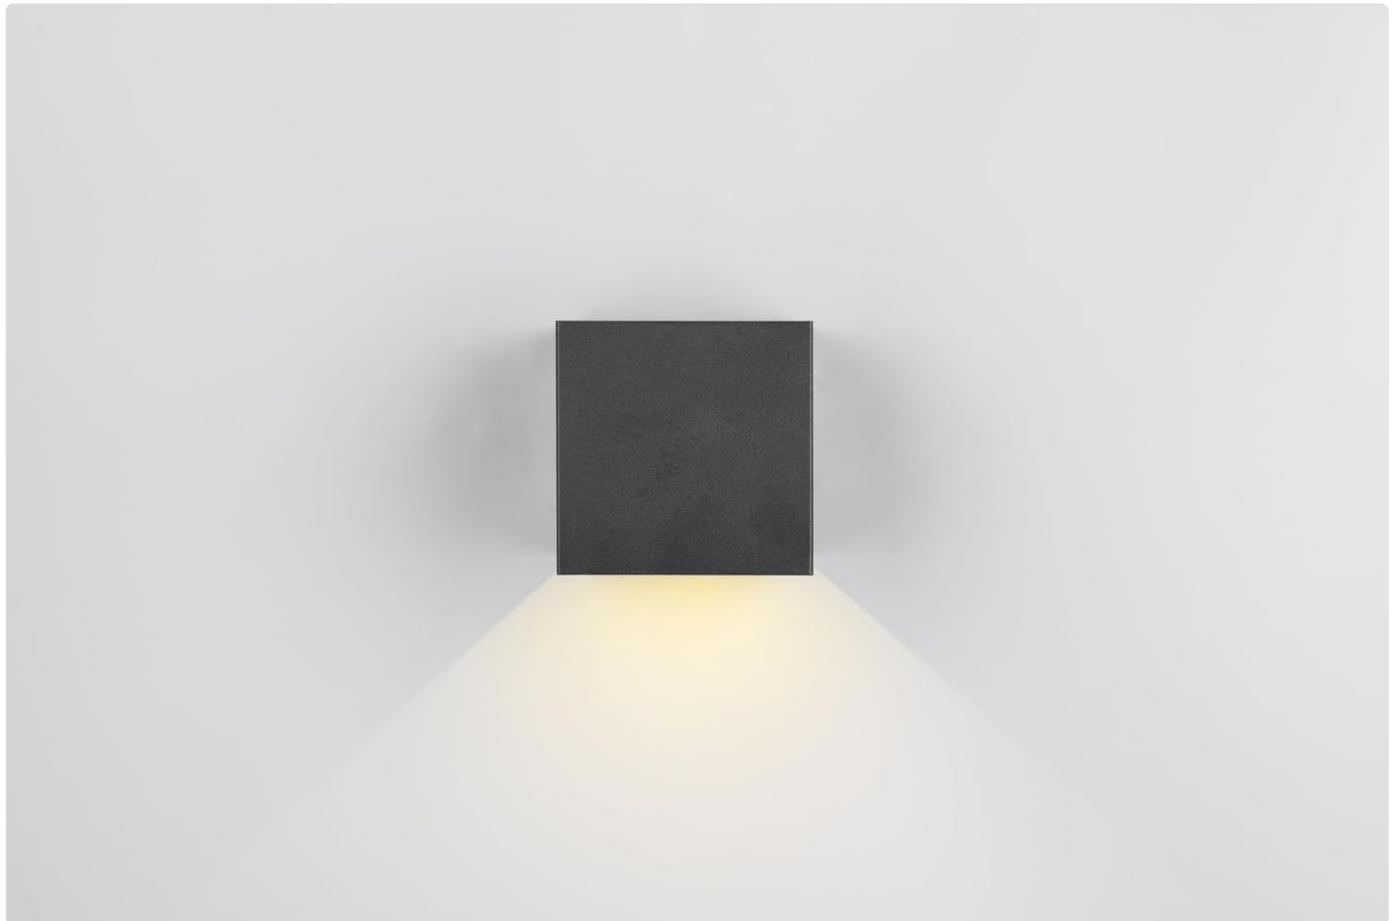


Figure 13: Lamp demonstrating downward light emission.

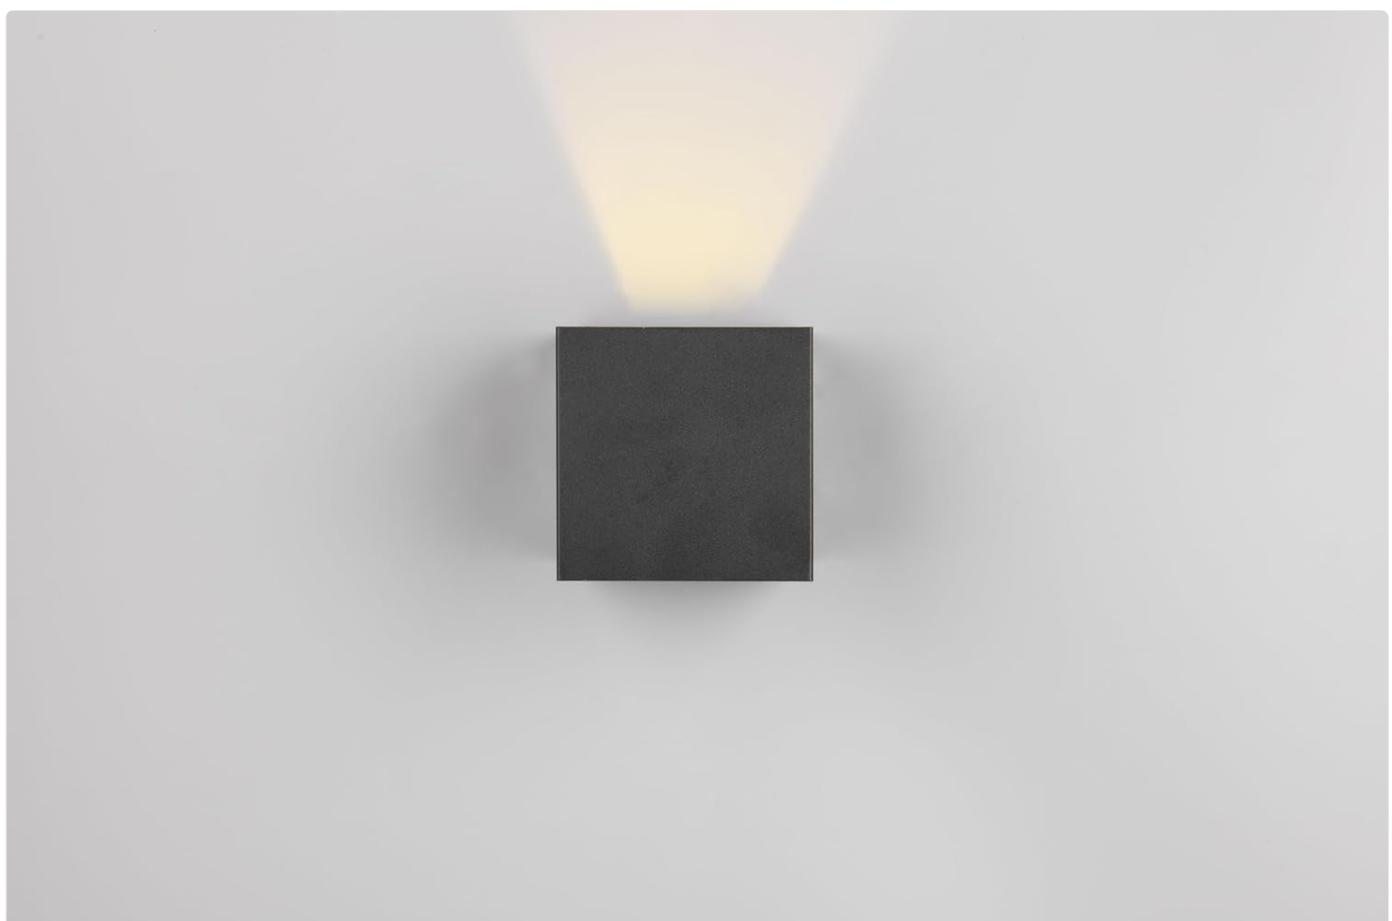


Figure 14: Lamp demonstrating upward light emission.

6. CHARGING THE BATTERY

The lamp is equipped with a rechargeable battery. To charge the battery, detach the lamp from its magnetic mount.

1. Locate the USB-C charging port on the lamp.



Figure 15: USB-C charging port and switch.

2. Connect the provided USB-C cable to the lamp's charging port and the other end to a suitable USB power adapter (not included).

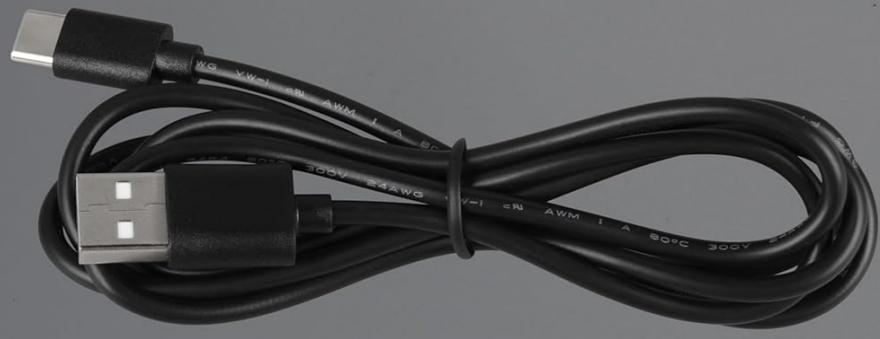


Figure 16: The included USB-C charging cable.

3. The charging time is approximately 5 hours for a full charge.
4. A fully charged battery provides approximately 6 hours of continuous lighting.



Figure 17: Key features and battery performance indicators.

7. MAINTENANCE

- **Cleaning:** Wipe the lamp with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- **Battery Care:** For optimal battery life, avoid fully discharging the battery frequently. Charge the lamp regularly, especially if it will not be used for an extended period.
- **Sensor Cleaning:** Ensure the motion and dusk sensors are free from dust or obstructions to maintain optimal performance.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution

Problem	Possible Cause	Solution
Lamp does not turn on.	Battery is discharged.	Charge the lamp using the USB-C cable.
	Switch is in 'Off' position.	Set the switch to Mode 'I' or 'II'.
	Dusk sensor mode (II) is active, but it's not dark enough.	Move to a darker area or switch to motion sensor mode (I).
Motion sensor (Mode I) is not working.	Sensor is obstructed or dirty.	Clean the sensor area. Ensure no objects are blocking the sensor's view.
	Lamp is too far from motion source.	Ensure motion occurs within the sensor's effective range.
Lamp does not charge.	USB-C cable or power adapter is faulty.	Try a different USB-C cable or power adapter.
	Charging port is dirty or damaged.	Gently clean the charging port. If damaged, contact customer support.

9. SPECIFICATIONS

Feature	Specification
Brand	RL LIVE YOUR LIGHT
Manufacturer	Reality Leuchten
Model Number	R27759132
Dimensions (L x W x H)	10 cm x 10 cm x 10.5 cm
Weight	700 g
Color	Matte Black
Material	Metal
Light Source	LED (2 x 0.5 W)
Luminous Flux	100 Lumen (total)
Color Temperature	3000 Kelvin
Average Lifespan	25,000 hours
Special Features	Motion Sensor, Dusk Sensor, Energy-efficient, Rechargeable
Power Source	Battery (1 Lithium-ion, included), USB-C charging
Charging Time	Approx. 5 hours
Operating Time (full charge)	Approx. 6 hours
Voltage	2.3E+2 Volts (likely refers to charging input, not operating voltage)
IP Rating	IP44 (Splash-proof)

Feature	Specification
EU Energy Efficiency Class	F

10. WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the official Reality Leuchten website or contact your retailer. Keep your purchase receipt as proof of purchase.

© 2024 Reality Leuchten. All rights reserved.