#### Manuals+

Q & A | Deep Search | Upload

#### manuals.plus /

- Lifelong /
- Lifelong TruePixel Smart Projector User Manual

# **Lifelong LLPJH10**

# Lifelong TruePixel Smart Projector User Manual

Model: LLPJH10

# 1. Introduction

This manual provides essential information for the safe and efficient operation of your Lifelong TruePixel Smart Projector. Please read this manual thoroughly before using the product and retain it for future reference.

The Lifelong TruePixel Smart Projector offers a comprehensive home entertainment experience with its Android 11 operating system, 1080p native resolution with 4K support, 6000 lumens brightness, and integrated speakers. It features electric focus and auto keystone correction for optimal image display.



Image 1.1: Lifelong TruePixel Smart Projector and Remote.

# 2. SAFETY INFORMATION

To ensure safe operation and prevent damage, observe the following precautions:

- Do not block ventilation openings. Ensure adequate airflow around the projector to prevent overheating.
- Avoid placing the projector on soft surfaces like blankets or beds, which can obstruct airflow.
- Keep the projector away from water or moisture.
- Use only the power adapter supplied with the projector.
- Do not attempt to open or repair the projector yourself. Refer all servicing to qualified personnel.
- Avoid direct eye exposure to the projector lens when the lamp is on.
- Position the projector on a stable, level surface to prevent accidental falls.

# 3. SETUP

# 3.1 Unboxing and Package Contents

Carefully remove all components from the packaging. Verify that all items are present:

- Lifelong TruePixel Smart Projector
- Remote Control
- HDMI Cable
- AV Cable
- · Cleaning Kit
- User Manual (this document)
- Power Adapter

# 3.2 Physical Placement

Place the projector on a stable, flat surface. The projector supports tabletop mounting. Ensure there is sufficient space around the projector for proper ventilation.



Image 3.1: Projector placement and screen size examples.

#### 3.3 Power Connection

- 1. Connect the power adapter to the projector's power input port.
- 2. Plug the power adapter into a suitable electrical outlet.
- 3. Press the power button on the projector or remote control to turn it on.

## 3.4 Initial Setup and Network Connection

Upon first power-on, follow the on-screen instructions to complete the initial setup, including language selection and Wi-Fi network connection. The projector supports Wi-Fi and Bluetooth connectivity.



Image 3.2: Android 11 Smart Operating System interface.

# 3.5 Input Connections

The projector provides various input ports for connecting external devices:

- HDMI: Connect gaming consoles, laptops, or other HDMI-enabled devices.
- USB: Connect USB drives for media playback.
- AV: Connect older devices using the provided AV cable.

• 3.5mm Jack: For external audio output.

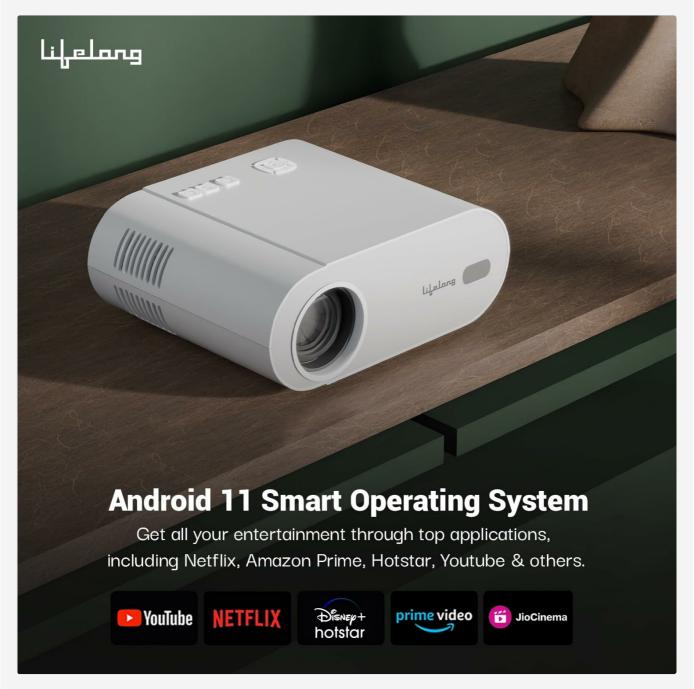


Image 3.3: Projector rear panel with input/output ports.

## 3.6 Focus and Keystone Adjustment

The projector features electric focus and automatic keystone correction to ensure a clear and rectangular image, even if the projector is not perfectly aligned with the screen.

- Electric Focus: Use the remote control to adjust the image sharpness.
- Auto Keystone Correction: The projector will automatically correct skewed images. Manual adjustments may be available in the settings menu for fine-tuning.



Image 3.4: Electric Focus and Keystone Correction in action.

## 4. OPERATING INSTRUCTIONS

## 4.1 Basic Navigation

Use the provided remote control to navigate the Android 11 interface. The directional buttons, OK button, and back button are essential for selecting apps, adjusting settings, and returning to previous screens.

## 4.2 Streaming Applications

The Android 11 operating system allows direct access to various streaming applications. Ensure the projector is connected to the internet via Wi-Fi to use these services. Popular apps like Netflix, Amazon Prime Video, YouTube, Hotstar, and JioCinema are supported.

## 4.3 Connecting External Audio Devices

The projector includes a built-in 5W speaker. For enhanced audio, you can connect external speakers or headphones:

- Bluetooth: Pair Bluetooth speakers or headphones through the projector's Bluetooth settings.
- 3.5mm Audio Jack: Connect wired speakers or headphones using a 3.5mm audio cable.



Image 4.1: Immersive sound experience with built-in speakers.

## 4.4 Screen Mirroring

The projector supports screen mirroring from compatible smartphones and other devices. Refer to the projector's settings for specific mirroring protocols and instructions. Performance may vary depending on network conditions and source device compatibility.

## 5. MAINTENANCE

## 5.1 Cleaning

Use the provided cleaning kit to maintain the projector. Gently wipe the lens with a soft, lint-free cloth. For the projector body, use a dry or slightly damp cloth. Avoid abrasive cleaners or solvents.

#### 5.2 Cooling System

The projector features a built-in cooling system designed for efficient heat dissipation. To ensure optimal performance and longevity:

- Keep the projector's ventilation ports clear of obstructions.
- Operate the projector in a well-ventilated area.
- If the projector becomes excessively hot or experiences performance issues, turn it off and allow it to cool down for at least 30 minutes before resuming use.



Image 5.1: Projector's silent cooling system.

# 6. TROUBLESHOOTING

If you encounter issues with your projector, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
No Power	Power cable disconnected, power outlet issue.	Ensure power cable is securely connected. Test the outlet with another device.
No Image Display	Incorrect input source, cable not connected, lens cap on.	Select the correct input source. Check HDMI/AV cable connections. Remove lens cap.
Blurry Image	Out of focus, incorrect keystone.	Adjust electric focus using the remote. Check keystone correction settings.
No Sound	Volume too low, incorrect audio output, external device muted.	Increase projector volume. Check audio output settings. Ensure connected device is not muted.
Wi-Fi/Bluetooth Connectivity Issues	Incorrect password, out of range, network interference.	Verify Wi-Fi password. Move projector closer to router. Restart projector and router.
Lag during Screen Mirroring	Network congestion, device incompatibility.	Ensure a strong Wi-Fi signal. Reduce network traffic. Update projector firmware if available.

If the problem persists, please contact customer support.

# 7. Specifications

Feature	Detail
Brand	Lifelong
Model Name	TruePixel Smart Projector
Model Number	LLPJH10
Product Dimensions	23.4 x 19.1 x 9.5 cm
Item Weight	1.46 kg
Operating System	Android 11
Display Technology	LED
Display Type	LCD
Native Resolution	1920 x 1080 (1080p Full HD)
Supported Resolution	Up to 3840 x 2160 (4K Ultra HD)
Image Brightness	6000 Lumens
Image Contrast Ratio	2000:1
Aspect Ratio	16:10, 16:9, 4:3
Refresh Rate	60 Hz
Built-in Speaker	5W

Feature	Detail
Connectivity Technology	Wi-Fi, Bluetooth, HDMI, USB, 3.5mm Jack
Special Features	Auto Obstacle Avoidance, Built-In Cooling System, Digital Keystone Correction, Electric Focus
Compatible Devices	Gaming Console, Laptop, Smartphone, Speaker
Mounting Type	Tabletop Mount
Power Consumption	90 Watt Hours
Voltage	175 Volts

# 8. WARRANTY AND SUPPORT

# 8.1 Warranty Information

For details regarding the product warranty, please refer to the warranty card included in your package or visit the official Lifelong website. Extended warranty options may also be available.

## **8.2 Customer Support**

For technical assistance, troubleshooting, or any other inquiries, please contact Lifelong customer support:

- **Phone:** +91 9711558877
- Email: customercare@lifelongonline.com
- Address: Lifelong Online Retail Private Limited, 5th Floor, Unit No. 508, DLF South Court, Saket District Center, Saket New Delhi, India – 110017

© 2024 Lifelong Online Retail Private Limited. All rights reserved.

#### **Related Documents - LLPJH10**



#### Lifelong FitPro Treadmill (LLTM09) User Manual

User manual for the Lifelong FitPro Treadmill (LLTM09), providing detailed instructions on installation, operation, maintenance, and troubleshooting. Features include a 2.5 HP peak motor, adjustable speed, and safety features.



# Lifelong Air Fryer User Manual LLHFD423/LLHFD429

User manual for the Lifelong Air Fryer LLHFD423/LLHFD429, detailing its features, usage instructions, cleaning, troubleshooting, technical specifications, and warranty information. Learn how to use your air fryer for healthier cooking with little to no oil.



#### Lifelong Soft Touch Rechargeable Multi-Trimmer for Women - User Manual and Warranty

Comprehensive user manual and warranty details for the Lifelong Soft Touch Rechargeable Multi-Trimmer for Women. Includes product features, operating instructions, cleaning, maintenance, and warranty terms and conditions.





#### Lifelong Smart Body Fat Scale LLWS36 User Manual and Guide

Comprehensive guide to the Lifelong Smart Body Fat Scale LLWS36, covering product features, installation, app connection, operation, troubleshooting, and warranty information.



## Lifelong Atta & Bread Maker LLBM01: User Manual and Recipes


Comprehensive guide to the Lifelong Atta & Bread Maker LLBM01, featuring 19 pre-set menus, automatic kneading, baking, and fermenting, plus detailed recipes and usage instructions.



#### Lifelong Appliances: Kitchen, Home, Fitness, and Healthcare Products

Explore Lifelong's extensive range of home appliances, kitchen essentials, fitness equipment, and healthcare products designed for modern Indian living. Discover quality products like coffee machines, smart cookware, treadmills, smartwatches, and more.

#### Documents - Lifelong - LLPJH10



#### Lifelong Product Item Code and MRP List

Comprehensive list of Lifelong product item codes with their Existing MRP and New MRP (inclusive of all taxes). This document provides detailed pricing information for a wide range of products.

lang:i-klingon score:14 filesize: 374.5 K page count: 25 document date: 2025-09-21