

## EVERSECU B8-4Pack

# EVERSECU 2K 3MP Outdoor Wireless Security Camera User Manual

Model: B8-4Pack

## 1. INTRODUCTION

Thank you for choosing the EVERSECU 2K 3MP Outdoor Wireless Security Camera. This manual provides detailed instructions for setting up, operating, and maintaining your security camera system. Please read this manual thoroughly before use to ensure proper functionality and safety.

The EVERSECU B8-4Pack offers advanced features including 2K resolution, 2-way audio, PIR motion detection, AI human detection, and IP65 weather resistance, all powered by a long-lasting rechargeable battery for wire-free installation.

## 2. SAFETY INFORMATION

- Ensure the camera is installed securely to prevent accidental falls.
- Do not expose the camera to extreme temperatures outside its operating range (-30°C to 55°C).
- Use only the specified charging cable and adapter to charge the camera battery.
- Keep the camera away from strong magnetic fields.
- Do not attempt to disassemble or modify the camera, as this will void the warranty and may cause damage.
- Dispose of batteries according to local regulations.

## 3. PACKAGE CONTENTS

The EVERSECU B8-4Pack includes the following items:

- 4 x EVERSECU 2K 3MP Wireless Security Cameras
- 4 x Mounting Brackets
- 4 x USB Charging Cables
- 1 x User Manual
- Mounting Screws and Wall Anchors

## 4. PRODUCT OVERVIEW

The EVERSECU B8 camera features a compact bullet design suitable for both indoor and outdoor use. Key components include:

- **Camera Lens:** Captures 2K (3MP) resolution video.
- **PIR Motion Sensor:** Detects heat signatures for accurate motion detection.
- **Spotlight:** Provides illumination for color night vision.
- **Infrared LEDs:** Enable black and white night vision.
- **Microphone:** For audio input during two-way communication.
- **Speaker:** For audio output during two-way communication and siren.
- **Status Indicator Light:** Shows camera status (e.g., pairing, recording).
- **USB Charging Port:** For recharging the internal battery.
- **Micro SD Card Slot:** Supports local storage up to 128GB (card not included).



Image: Overview of four EVERSECU 2K 3MP Wireless Security Cameras, showcasing their design and compact size.



Image: Diagram highlighting key features of the EVERSECU camera, including 2K image quality, IP65 waterproofing, AI detection, 2.4GHz WiFi, color night vision, unlimited user sharing, customizable motion zones, and 2-way audio.

## 5. SETUP

### 5.1 Charging the Battery

Before initial use, fully charge the camera's built-in 5000mAh battery using the provided USB cable and a standard 5V/1A or 5V/2A USB power adapter (not included). The status indicator light will show charging progress and completion.

### 5.2 App Installation

Download the "O-KAM" app from your smartphone's app store (available for iOS and Android devices). Search for "O-KAM" and install the application.

### 5.3 Bluetooth Pairing and Wi-Fi Connection

1. **Enable Bluetooth:** On your smartphone, ensure Bluetooth is turned on.
2. **Open O-KAM App:** Launch the O-KAM app and create an account or log in.
3. **Add Device:** Tap the "Add Device" or "+" icon in the app. The app will automatically search for nearby EVERSECU cameras via Bluetooth.
4. **Select Camera:** Once your camera appears in the app's device list (e.g., "MC-VQ01 16840RJDQ"), select it to connect.
5. **Connect to Wi-Fi:** Follow the in-app prompts to connect the camera to your 2.4GHz Wi-Fi network **Note:** This camera only supports 2.4GHz Wi-Fi, not 5GHz.
6. **Complete Setup:** Once connected, you can name your camera and begin live viewing.

# Device Setup via Bluetooth

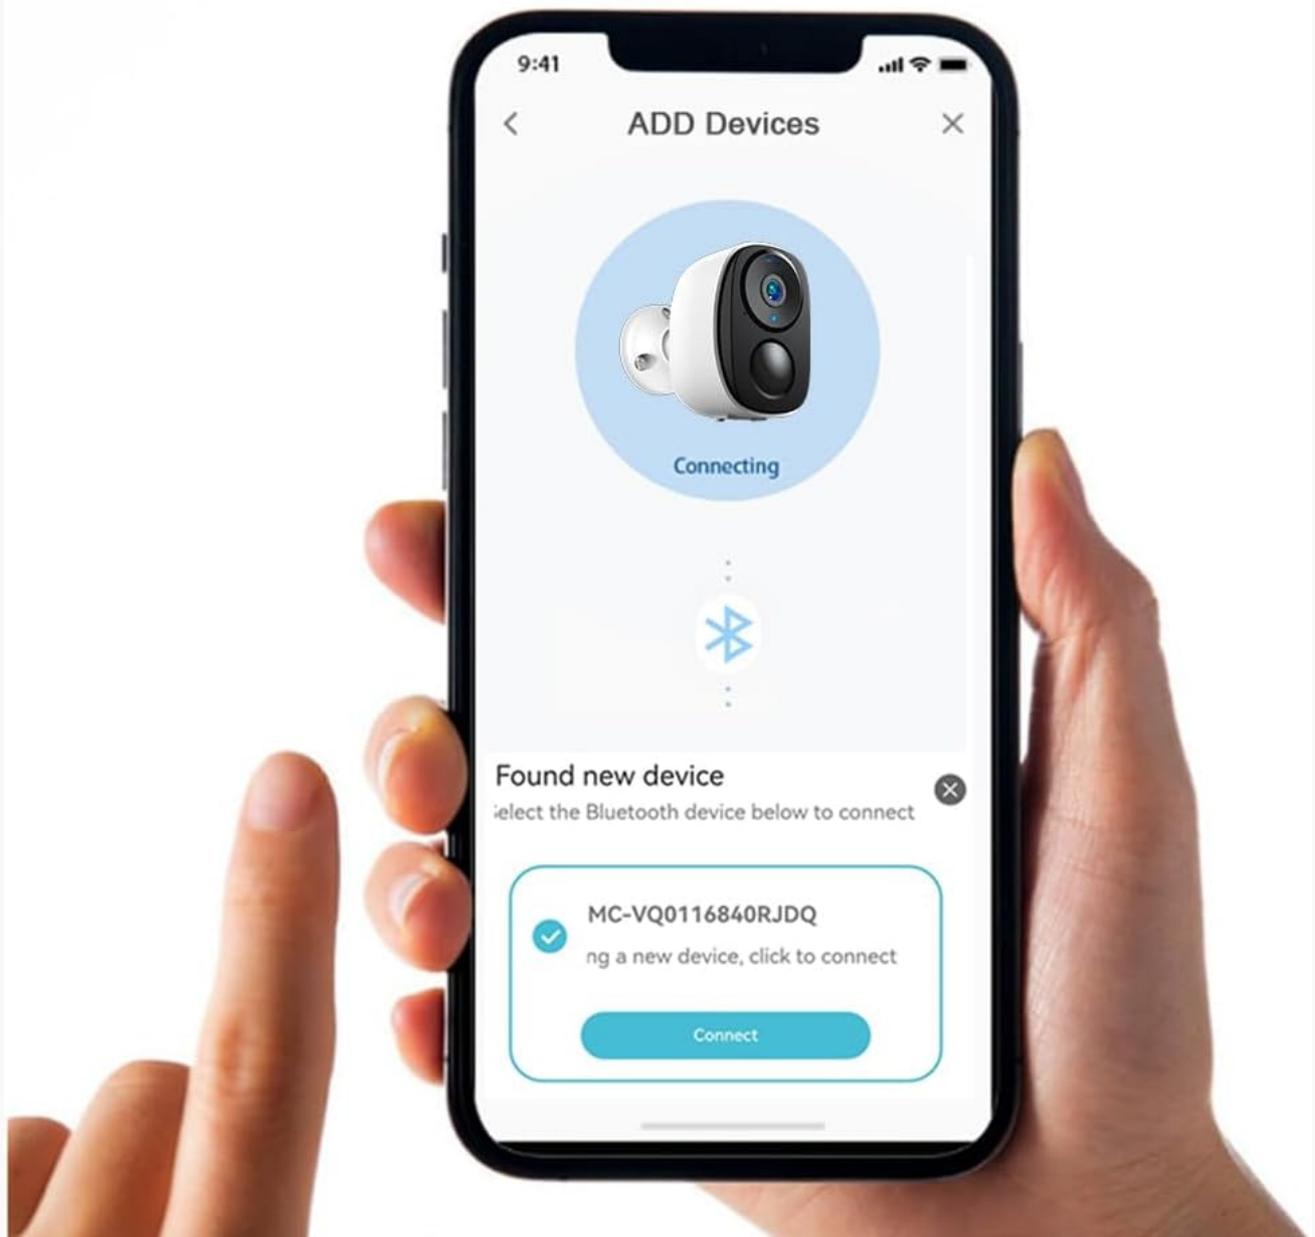


Image: A smartphone displaying the O-KAM app interface for device setup, illustrating the Bluetooth pairing process where a new camera is discovered and ready for connection.

## Better Protection Through Built-in AI

The Eversecu security camera is capable of distinguishing between humans and inanimate objects, and it will send notifications for significant events.



Image: A visual guide demonstrating the three-step Bluetooth pairing process for the EVERSECU camera, from enabling Bluetooth to connecting via the O-KAM app.

### 5.4 Mounting the Camera

The camera is designed for wall mounting. Choose a location that provides the desired viewing angle and is within range of your Wi-Fi network. Use the provided mounting bracket, screws, and wall anchors to securely attach the camera.



Image: A person installing an EVERSECU camera on an exterior wall, illustrating the ease of wire-free installation.

## 6. OPERATING THE CAMERA

### 6.1 Live View

Open the O-KAM app and select your camera from the device list to access the live video feed. You can view the 2K resolution video in real-time.

### 6.2 Two-Way Audio

The camera features a built-in microphone and speaker, allowing for two-way communication. In the live view interface of the O-KAM app, tap the microphone icon to speak through the camera and the speaker icon to listen to audio from the camera's location.

# 2-Way Audio

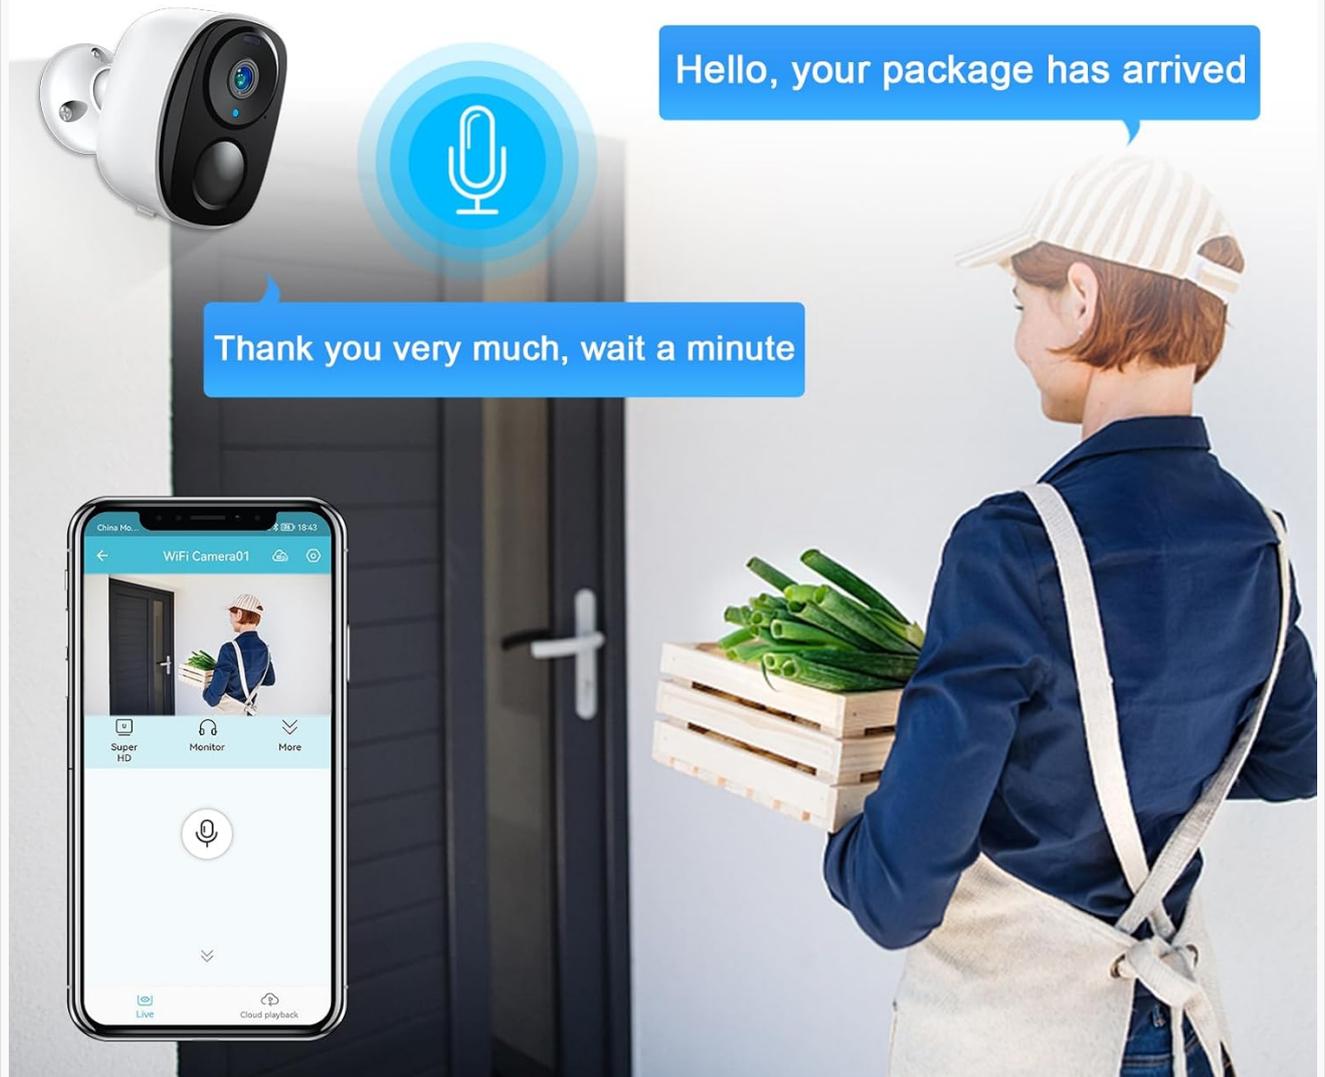


Image: Depiction of the two-way audio function, showing a user communicating with a delivery person at their door via the camera and smartphone app.

## Spotlight For Color Night Vision

Capture details in 2K HD Video and see more at night with color night vision



Image: A woman using her smartphone to engage in two-way communication with a visitor at her front door, facilitated by the security camera.


### 6.3 Motion Detection & Alerts

The camera utilizes a highly sensitive PIR motion sensor and AI algorithms for human detection. When motion is detected, the camera can:

- Send real-time alerts to your smartphone via the O-KAM app.
- Trigger recording to a micro SD card or cloud storage.
- Activate the built-in spotlight for enhanced visibility or as a deterrent.



Image: A visual representation of the AI human detection system, showing a person being detected by the camera, leading to app notifications and email alerts on a smartphone.

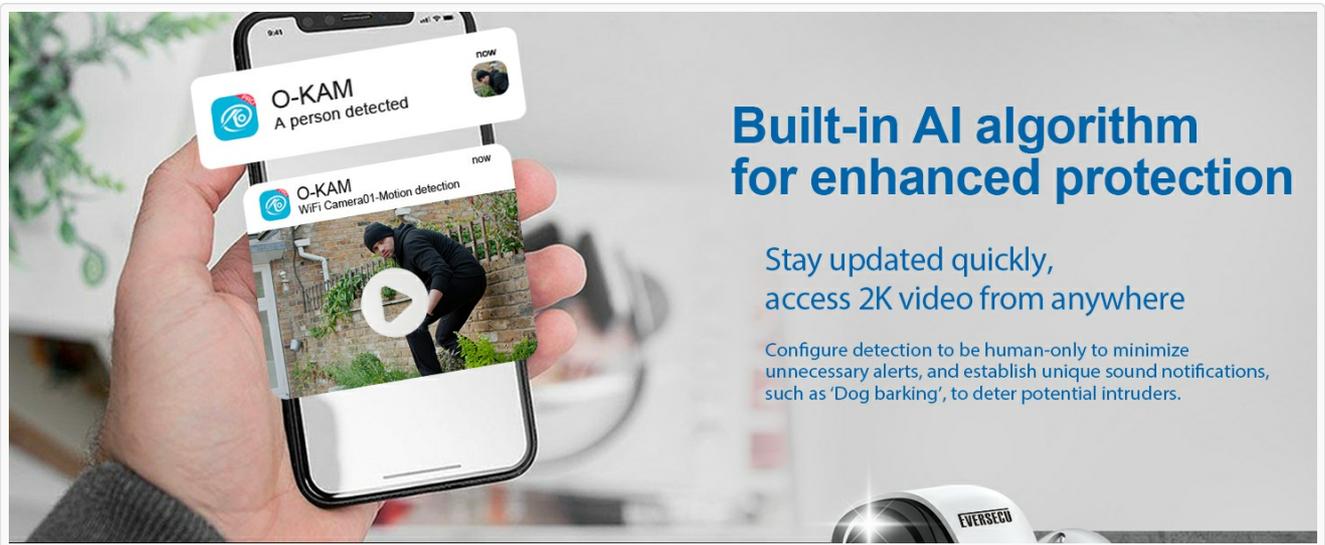

## Built-in AI algorithm for enhanced protection

Stay updated quickly, access 2K video from anywhere

Configure detection to be human-only to minimize unnecessary alerts, and establish unique sound notifications, such as 'Dog barking', to deter potential intruders.

Image: A smartphone screen showing O-KAM app notifications for detected human activity, emphasizing the camera's built-in AI algorithm for enhanced protection.

## Cloud Storage & SD Storage

3 Days palyback for life free

 Cloud Storage

 Micro SD Card

**Up to 256GB**  
(no included)  
Free Local Storage

Image: Two children playing in a garden, with AI detection frames around them, demonstrating the camera's ability to distinguish humans from inanimate objects for more accurate alerts.

### Activity Zones

You can define specific activity zones within the camera's field of view to reduce unnecessary alerts. This allows the camera to only trigger recordings and notifications for motion detected in designated areas.

# Area Detection-Precise Defense

You can monitor important monitoring alert areas on mobile phone applications


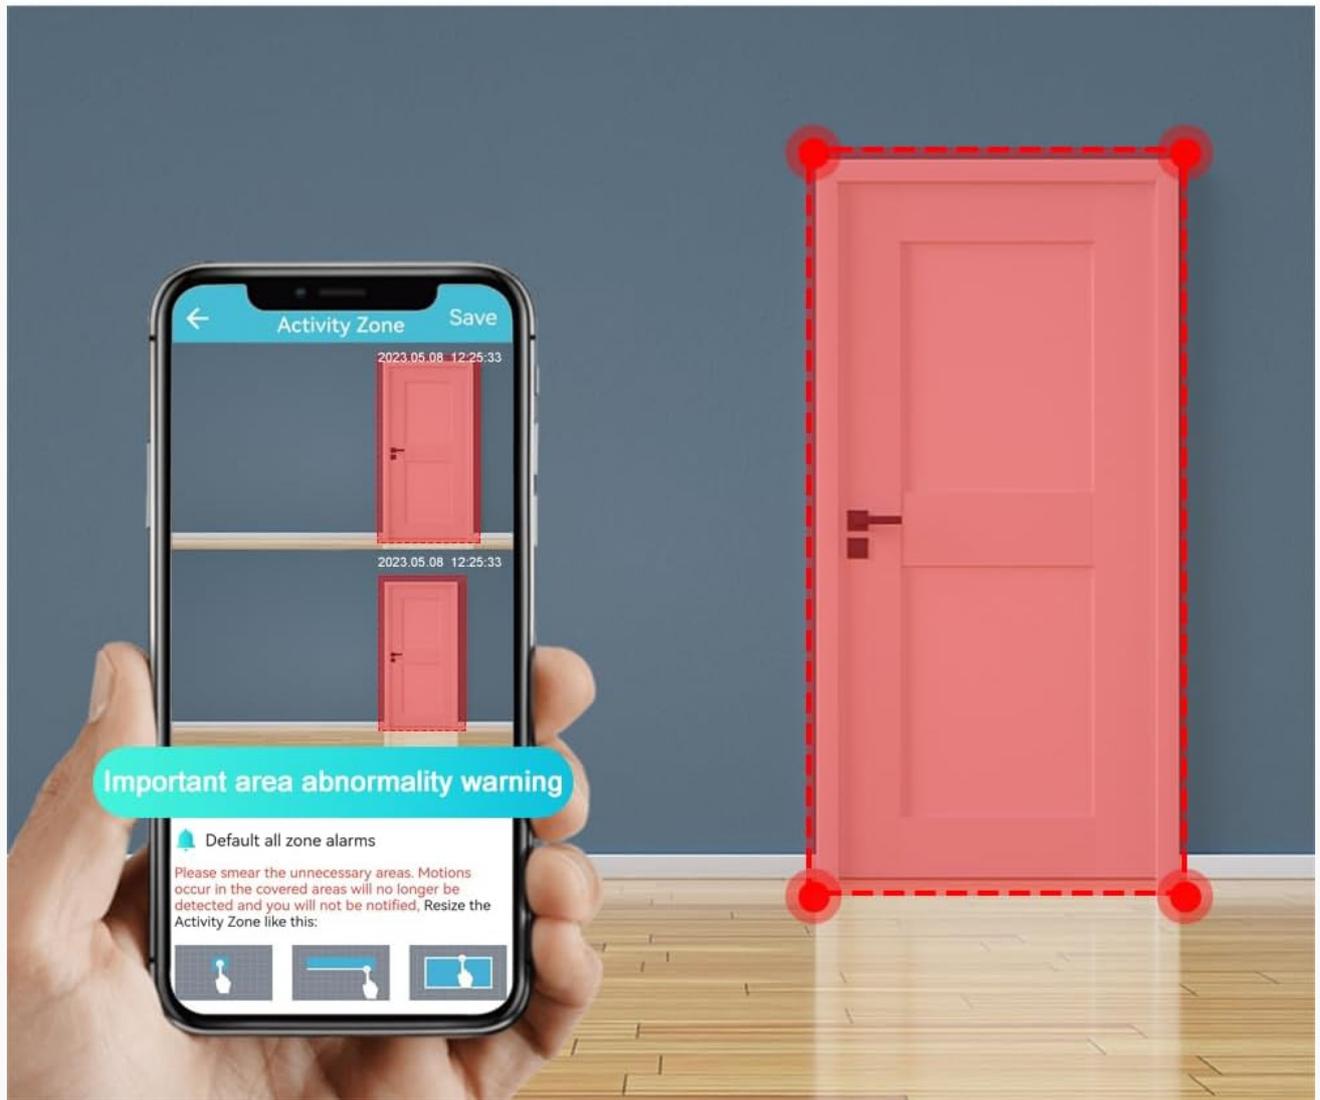


Image: A smartphone screen displaying the "Activity Zone" feature, where a specific area (a door) is highlighted for precise motion detection and alerts.

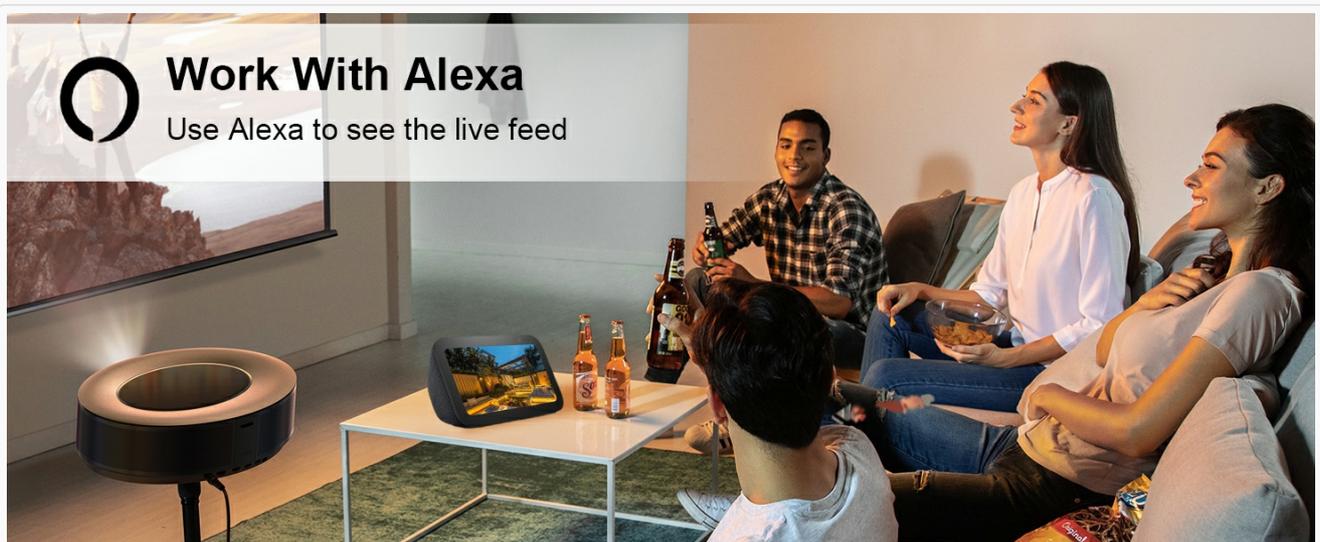

## Work With Alexa

Use Alexa to see the live feed

Image: An illustration of a house with its front yard divided into two distinct personalized activity areas, demonstrating how users can define specific zones for receiving important alerts.

## 6.4 Night Vision Modes

The camera offers two night vision modes:

- **Color Night Vision:** Utilizes the built-in spotlight to capture full-color video in low-light conditions.
- **Infrared Night Vision:** Provides clear black and white video using infrared LEDs in complete darkness.

You can switch between these modes via the O-KAM app settings.

## Switch Night Vision Mode with App



**Color mode**



**Infrared mode**


Image: A comparison showing the difference between color night vision (top) and infrared night vision (bottom) in a street scene, demonstrating the camera's ability to switch modes via the app.

## Pairing Via Bluetooth

**Step 1**  
Bluetooth connection



**Step 2**  
Open app Add camera

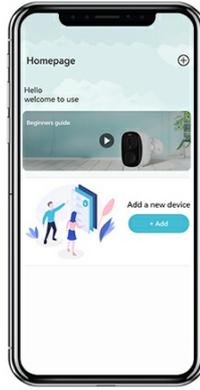

**Step 3**  
APP pop-up notification  
Direct connection

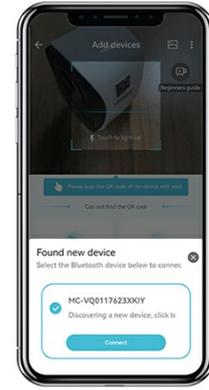


Image: A smartphone screen displaying both 2K color night vision and infrared night vision modes, highlighting the camera's spotlight feature for enhanced color capture at night.

## 6.5 Recording & Storage

The camera supports two storage options for recorded video:

- **Micro SD Card:** Insert a micro SD card (up to 128GB, not included) into the camera's designated slot for local storage of motion-triggered recordings.
- **Cloud Storage:** The O-KAM app offers a paid cloud storage service. A 7-day free trial is typically available upon initial setup.



Image: A graphic illustrating the camera's dual storage capabilities: cloud storage with a free playback period and local storage via a micro SD card (up to 256GB, not included).

## 6.6 Multi-User Access

You can share access to your camera's live feed and recordings with family members or trusted individuals through the O-KAM app. This typically involves scanning a QR code generated within the app.

## 6.7 Alexa Integration

The EVERSECU camera is compatible with Amazon Alexa. You can use voice commands to view the live feed on compatible Alexa-enabled devices (e.g., Echo Show).

## Hear and speak to the visitors

Enables you to observe your home's activities and engage in two-way communication.

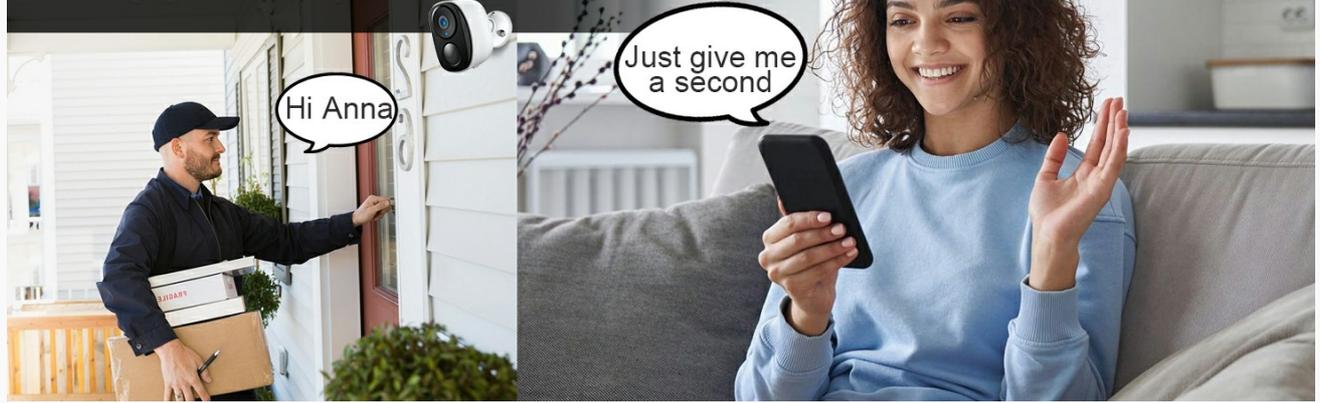


Image: A group of people watching a live camera feed on an Amazon Echo Show device, demonstrating the camera's compatibility and integration with Alexa.

## 7. MAINTENANCE

- **Battery Charging:** Recharge the camera battery when the app indicates low power. Battery life can last 2-3 months depending on usage and motion detection frequency.
- **Cleaning:** Periodically clean the camera lens and housing with a soft, dry cloth to ensure clear image quality. Do not use harsh chemicals.
- **Firmware Updates:** Check the O-KAM app regularly for available firmware updates. Updates can improve performance and add new features. Follow in-app instructions for updating.

## 8. TROUBLESHOOTING

Problem	Possible Solution
Camera won't power on.	Ensure the battery is fully charged. Connect to a power source and check the status indicator light.
Unable to connect to Wi-Fi.	<ul style="list-style-type: none"><li>◦ Confirm your Wi-Fi network is 2.4GHz.</li><li>◦ Ensure the camera is within range of your Wi-Fi router.</li><li>◦ Check Wi-Fi password accuracy.</li><li>◦ Restart your router and the camera.</li></ul>
Motion alerts are too frequent or not received.	<ul style="list-style-type: none"><li>◦ Adjust motion detection sensitivity in the O-KAM app.</li><li>◦ Configure activity zones to focus on important areas.</li><li>◦ Ensure app notifications are enabled on your smartphone.</li></ul>
Poor image quality.	<ul style="list-style-type: none"><li>◦ Clean the camera lens.</li><li>◦ Ensure sufficient lighting for optimal image capture.</li><li>◦ Check your internet connection speed.</li></ul>

Problem	Possible Solution
Two-way audio not working.	<ul style="list-style-type: none"> <li>Check microphone and speaker permissions for the O-KAM app on your phone.</li> <li>Ensure volume levels are adjusted correctly.</li> <li>Verify internet connection stability.</li> </ul>

## 9. SPECIFICATIONS

Feature	Detail
Model Number	B8-4Pack
Video Resolution	2K (3MP), 1920p
Field of View	110 Degrees
Connectivity	2.4GHz Wi-Fi, Bluetooth
Power Source	Battery Powered (5000mAh Lithium Ion)
Battery Life	2-3 months (depending on usage)
Storage Options	Micro SD Card (up to 128GB), Cloud Storage
Weather Resistance	IP65
Motion Detection	PIR Motion Sensor, AI Human Detection
Audio	2-Way Audio (Built-in Mic & Speaker)
Night Vision	Color Night Vision (Spotlight), Infrared Night Vision
Compatible Devices	iOS/Android, Amazon Alexa
Dimensions (L x W x H)	4.37 x 2.91 x 5.2 inches
Weight	3.52 pounds (for 4 cameras, total)

# IP65 Waterproof

Made of high-quality plastic material, appropriately play a  $-30^{\circ} \sim 55^{\circ} \text{C}$   
Continue to record, rainy days or light, hot and cold or cold



Image: An EVERSECU camera mounted outdoors during rainfall, illustrating its IP65 waterproof rating and durability in various weather conditions.

# High Resolution

3MP High-Definition Picture Quality, Clear Image

3MP High-Definition Pixels



2MP Image Quality




Image: A side-by-side comparison demonstrating the superior clarity and detail of 3MP high-definition video compared to 2MP image quality, showcasing a house.

## 10. WARRANTY AND SUPPORT

EVERSECU products come with a limited warranty. For detailed warranty information, product support, or technical assistance, please contact EVERSECU customer service through the contact information provided on the official EVERSECU website or within the O-KAM app.

You can also visit the [EVERSECU Store on Amazon](#) for more information and product updates.

© 2024 EVERSECU. All rights reserved.

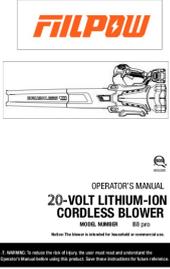	<p><a href="#">Ensenior Ultra-Thin LED Recessed Lighting User Manual</a></p> <p>Comprehensive user manual for Ensenior Ultra-Thin LED Recessed Lighting, covering installation, features, and specifications for various models.</p>
	<p><a href="#">FIILPOW 20V Lithium-Ion Cordless Blower (B8 pro) Operator's Manual</a></p> <p>Operator's manual for the FIILPOW 20V Lithium-Ion Cordless Blower, Model B8 pro. Includes safety guidelines, specifications, assembly, operation, maintenance, troubleshooting, and warranty information.</p>
	<p><a href="#">B8 Headphone User Manual and Compliance Information</a></p> <p>User manual and FCC/IC compliance information for the B8 Headphone by Shenzhen PINCUN digital technology Co., Ltd. Includes details on regulatory compliance and RF exposure.</p>
	<p><a href="#">MiBoxer FUT037W RGB LED Controller: WiFi + 2.4G User Guide</a></p> <p>Comprehensive guide to the MiBoxer FUT037W RGB LED Controller, covering features, parameters, app installation, control methods (WiFi, Bluetooth, 2.4G), voice assistant integration (Alexa, Google Home), and dynamic modes.</p>
	<p><a href="#">Frameless Sliding Shower Door Installation Guide - B7, B8, B9 Series</a></p> <p>Step-by-step installation instructions and safety precautions for frameless sliding shower doors, including parts identification, assembly, and maintenance tips for B7, B8, and B9 series models.</p>
	<p><a href="#">FOSCAM FN3108E NVR User Manual</a></p> <p>Comprehensive user manual for the FOSCAM FN3108E Network Video Recorder (NVR) Kit. Learn about installation, setup, GUI and web interface operations, key features like network monitoring, multi-screen preview, recording, playback, and essential safety guidelines for your FOSCAM surveillance system.</p>