

- Manuals.plus /
- › Gerafame /
- › Gerafame Y6 Smart Watch User Manual

Gerafame Y6

Gerafame Y6 Smart Watch User Manual

Model: Y6

- Overview
- Setup
- Operation
- Features
- Maintenance
Support
- Troubleshooting
- Specifications
- Warranty &

1. PRODUCT OVERVIEW

The Gerafame Y6 Smart Watch is a versatile fitness tracker designed to monitor various health metrics and provide convenient communication features. It features a 1.83-inch HD full touch color screen, Bluetooth call functionality, message notifications, and multiple sports modes. The device is IP68 waterproof and offers extended battery life.



Image 1.1: Gerafame Y6 Smart Watch displaying its main interface.

What's in the Box:

- Gerafame Y6 Smart Watch
- Magnetic Charging Cable
- User Manual (this document)



Image 1.2: Packaging contents of the Gerafame Y6 Smart Watch.

2. INITIAL SETUP

2.1 Charging the Device

Before first use, fully charge your Gerafame Y6 Smart Watch. Connect the magnetic charging cable to the charging points on the back of the watch and plug the USB end into a standard USB power adapter (not included) or a computer's USB port. The watch typically charges fully in approximately 2 hours.

2.2 App Installation and Pairing

1. Download the "GloryFit" app from your smartphone's app store (compatible with Android 5.0+ and iOS 9.0+).
2. Open the GloryFit app and create an account or log in.
3. Ensure Bluetooth is enabled on your smartphone.
4. In the GloryFit app, navigate to the device section and search for your Gerafame Y6 Smart Watch.
5. Select your watch from the list to initiate the pairing process. Follow any on-screen prompts on both your phone and watch to confirm the connection.

Once paired, the watch will synchronize with your phone, and you can customize settings and view data within the app.

3. BASIC OPERATION

3.1 Navigating the Interface

- **Touch Screen:** Swipe left, right, up, or down to navigate through menus and screens. Tap to select an option.
- **Side Button:** Press the side button to return to the home screen or wake the device. A long press may access power options.

3.2 Adjusting Brightness

The watch features four levels of brightness. Access the settings menu on the watch or through the GloryFit app to adjust the screen brightness for optimal visibility in various lighting conditions.

3.3 Customizing Watch Faces

Personalize your watch by choosing from multiple watch faces available in the GloryFit app. You can also upload a custom picture from your phone to use as a watch face.

4. KEY FEATURES

4.1 Bluetooth Call and Message Notifications

The Gerafame Y6 Smart Watch allows you to make and receive calls directly from your wrist using its built-in speaker and microphone. It also displays message alerts from your synchronized mobile phone, ensuring you do not miss important communications. You can synchronize your address book and call history via the GloryFit app.

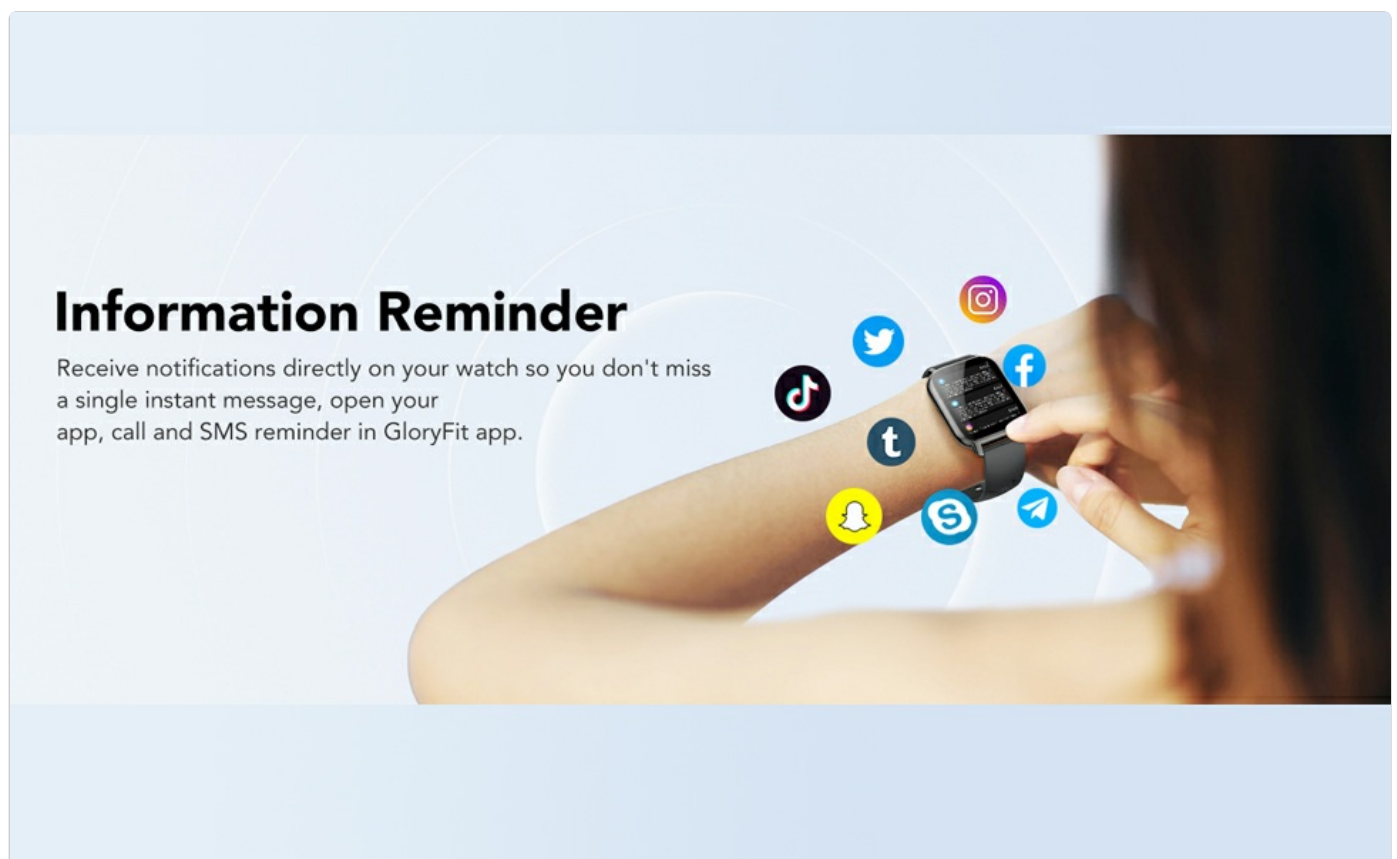


Image 4.1: Information Reminder feature showing notifications on the watch.

4.2 Health Monitoring

Monitor your well-being with continuous health tracking features:

- **Heart Rate Monitor:** Tracks your heart rate throughout the day.
- **Blood Oxygen Monitor:** Measures your blood oxygen levels.
- **Stress Level Monitoring:** Helps you keep an eye on your stress levels.

- **Sleep Tracking:** Records time spent in Awake, Light, and Deep sleep stages.
- **Menstrual Cycle Tracking:** Provides synchronization with your menstrual cycle.

4.3 Fitness Tracking (100+ Sports Modes)

The fitness tracker supports over 100 sports modes, including running, yoga, jumping jack, and sit-ups. During exercise, the watch displays real-time statistics such as heart rate, steps, calories burned, distance, and active hours. This data helps you monitor your performance and progress.



Image 4.2: Illustration of the 100+ Sports Modes feature.

4.4 IP68 Waterproof Rating

The Gerafame Y6 Smart Watch is IP68 waterproof, making it suitable for use during outdoor activities, in rainy conditions, and while washing hands. It is not recommended for diving or prolonged submersion in water.

4.5 Long Battery Life

Equipped with a large capacity battery, the watch provides up to 7 days of usage on a single charge and has a standby time of approximately 30 days. A full charge takes about 2 hours.

4.6 Additional Functions

The watch and the GloryFit app offer several practical tools:

- Weather Forecasts
- Stopwatch and Timer
- Music Control
- Find Phone/Watch function
- Breathing Training
- Smart Alarm Clock
- Camera Control

- Sedentary Reminder

5. MAINTENANCE AND CARE

- **Cleaning:** Regularly wipe the watch screen and strap with a soft, dry cloth. For stubborn dirt, use a slightly damp cloth and mild soap, then dry thoroughly.
- **Charging:** Use only the provided magnetic charging cable. Ensure the charging contacts on the watch and cable are clean and dry before charging.
- **Water Exposure:** While IP68 waterproof, avoid exposing the watch to hot water, steam, or high-pressure water jets. Dry the watch completely after exposure to water.
- **Storage:** Store the watch in a cool, dry place when not in use. Avoid extreme temperatures.
- **Strap Care:** If the strap is removable, clean it separately according to its material.

6. TROUBLESHOOTING

Problem	Possible Solution
Watch not turning on	Ensure the watch is fully charged. Connect it to the charger for at least 30 minutes.
Cannot pair with smartphone	Ensure Bluetooth is enabled on your phone. Make sure the watch is within Bluetooth range. Restart both the watch and your smartphone. Check if the GloryFit app is updated to the latest version. Forget the device in your phone's Bluetooth settings and try pairing again through the app.
Notifications not received	Verify that the watch is successfully paired with your phone. Check notification permissions for the GloryFit app in your phone's settings. Ensure notification settings are enabled within the GloryFit app for desired applications. Confirm that "Do Not Disturb" mode is not active on either the watch or phone.
Inaccurate step count or health data	Ensure the watch is worn snugly on your wrist, about one finger's width above the wrist bone. Calibrate the watch through the GloryFit app if an option is available. Restart the watch.
Short battery life	Reduce screen brightness. Limit continuous heart rate monitoring or other intensive features if not needed constantly. Ensure no background apps are excessively draining power.

7. PRODUCT SPECIFICATIONS

Feature	Detail
Model Name	Y6

Feature	Detail
Brand	Gerafame
Screen Size	1.83 Inches
Standing Screen Display Size	1.83 Inches (Visible screen diagonal: 2" / 5 cm)
Shape	Square
Operating System	Andriod (Compatible with Android 5.0+ and iOS 9.0+)
Connectivity Technology	Bluetooth
Wireless Communication Standard	Bluetooth
Special Feature	Activity Tracker, Heart Rate Monitor, Blood Oxygen Monitor, Sleep Monitor, Stress Monitor, Bluetooth Call, Message Notifications, 100+ Sports Modes, IP68 Waterproof
GPS	No GPS
Battery Cell Composition	Lithium Ion (1 AAA battery required, included - <i>Note: This seems like a data inconsistency, smartwatches typically use Li-ion, not AAA. Assuming Li-ion based on context.</i>)
Battery Life	Up to 7 days (usage), 30 days (standby)
Charging Time	Approx. 2 hours
Item Weight	2.89 ounces
Package Dimensions	6.06 x 3.43 x 0.75 inches
Manufacturer	Gerafame

8. WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the official Gerafame website or contact their customer service directly. Details regarding warranty periods and service procedures are typically provided with your purchase documentation or on the manufacturer's official support channels.

Manufacturer: Gerafame

Model: Y6

For further assistance, please visit the [Gerafame Store on Amazon](#).

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question

and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0CYNXGCB4>

More documents and user manuals: **<https://manuals.plus/>**