

Edifier D32

Edifier D32 Tabletop Wireless Speaker Instruction Manual

Model: D32

INTRODUCTION

The Edifier D32 is a versatile tabletop wireless speaker designed to deliver high-quality audio with multiple connectivity options. This manual provides essential information for setting up, operating, and maintaining your speaker.

PACKAGE CONTENTS

Upon unboxing your Edifier D32 speaker, please verify that all the following items are included:

- Edifier D32 Wireless Speaker
- Quick Start Guide
- USB-C to USB-C Audio Cable
- 3.5mm to 3.5mm Audio Jack Cable
- Power Cable



Image: Edifier D32 speaker, quick start guide, USB-C cable, and 3.5mm audio cable neatly packed in the box.

SETUP

1. Powering On and Charging

1. Connect the provided power cable to the speaker's power input port located on the rear panel.
2. Plug the other end of the power cable into a wall outlet.
3. Press and hold the power button on the speaker's front panel to turn it on. The indicator light will illuminate.
4. For initial use, it is recommended to fully charge the speaker. A full charge provides approximately 11 hours of playtime.

2. Bluetooth Connection

1. Turn on the Edifier D32 speaker.
2. Press the Bluetooth button on the speaker's front panel. The Bluetooth indicator light will flash, indicating pairing mode.
3. On your audio source device (smartphone, tablet, laptop), enable Bluetooth and search for "EDIFIER D32".
4. Select "EDIFIER D32" to pair. Once connected, the Bluetooth indicator light will remain solid.



Image: The Edifier D32 speaker demonstrating Bluetooth 5.3 connectivity and LDAC codec support, controllable via the Edifier ConneX app on a smartphone.

3. Wi-Fi and AirPlay 2 Setup

For Wi-Fi connectivity and Apple AirPlay 2 functionality, download the **Edifier ConneX** mobile application from your device's app store. Follow the in-app instructions to connect your speaker to your Wi-Fi network and enable AirPlay 2.

EDIFIER ConneX APP

Works with EDIFIER ConneX mobile App for more functions.

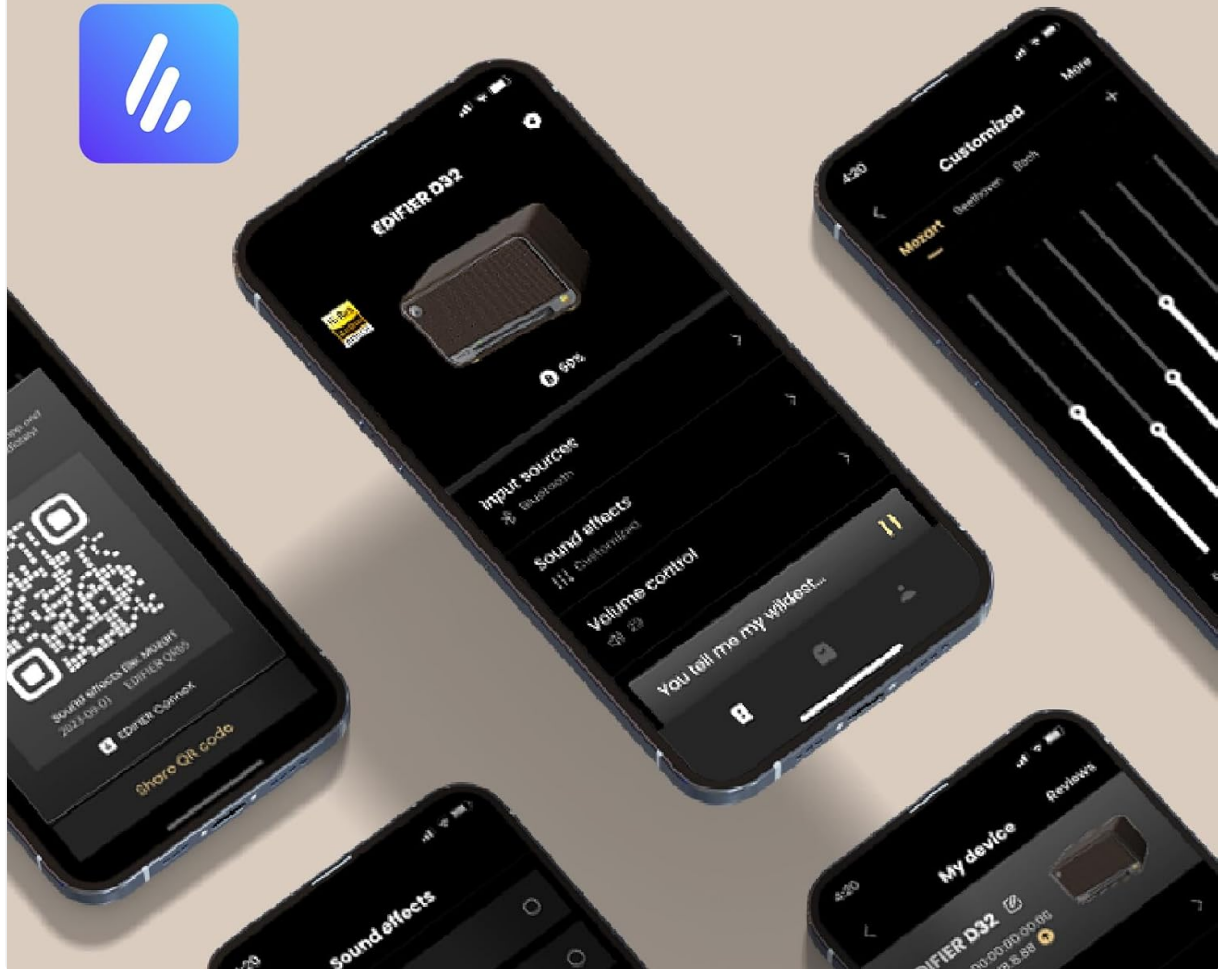


Image: The Edifier ConneX mobile application interface, illustrating control over input sources, sound effects, and volume for the D32 speaker.

4. Wired Connections (USB-C and AUX)

The Edifier D32 supports wired audio input via USB-C and AUX ports located on the rear panel. Use the provided cables to connect compatible devices.



HIGH-RESOLUTION AUDIO

The USB-C and AUX input ports support signals with a resolution of up to 24bit/96kHz.

Image: Rear panel of the Edifier D32 speaker, showing the USB-C and AUX input ports, which support high-resolution audio up to 24-bit/96kHz.

OPERATING THE SPEAKER

Front Panel Controls

The accordion keyboard on the front panel provides convenient control over playback:

- **Power On/Off, Source Switch:** Press to power on/off or switch between input sources.
- **Bluetooth Connection Control:** Press to enter Bluetooth pairing mode or disconnect.
- **Play/Pause, Mute/Unmute, WAC Setup:** Controls media playback and Wi-Fi Acoustic Calibration setup.
- **Volume Down, Previous Track:** Decreases volume or skips to the previous track.
- **Volume Up, Next Track:** Increases volume or skips to the next track.

EDIFIER

D32 TABLETOP WIRELESS SPEAKER



High Resolution
Audio



Bluetooth V5.3



Full Digital Signal
Processing



EDIFIER
ConneX App



11 Hours Playtime



Two-way Active
Crossover

Image: Detailed view of the Edifier D32's front panel, illustrating the functions of each button on the accordion keyboard for easy control.

Edifier ConneX App Control

The Edifier ConneX app offers extended control and customization options, including EQ settings, input source selection, and multi-room audio management.

FEATURES

- **Superior Sound Quality:** 60 watts RMS total output power from dual silk dome tweeters and long-throw mid-low drivers, providing distortion-free stereo sound.
- **High-Resolution Audio:** Supports up to 24-bit/96kHz audio through its end-to-end digital audio process and analog audio front end.
- **Bluetooth 5.3 with LDAC:** Equipped with Bluetooth 5.3 for stable wireless connection and LDAC codec support for high-bitrate audio transmission (up to 990kbps).
- **Long Battery Life:** Built-in 7.4V/5200mAh battery offers up to 11 hours of continuous playback.
- **Multi-Room Audio:** Supports Wi-Fi (Apple AirPlay 2) for multi-room audio setups.
- **Retro Wooden Design:** Features a handmade wooden case with a stylish vintage aesthetic, complemented by a braided fabric grille and metal accents.
- **Versatile Connectivity:** Includes USB-C and AUX inputs for wired connections.



QUALITY SOUND PERFORMANCE

- ◆ 30W+15W*2 (RMS) total output power with Class-D TI digital amplifier chips
- ◆ Dual 1" (25mm) silk dome tweeters and 4" (116mm) long-throw mid-low drivers

Image: Internal view of the Edifier D32, highlighting its acoustic components for superior sound performance.

LONG BATTERY LIFE

11 hours playtime with a built-in 5200mAh battery



Image: The Edifier D32 speaker showcasing its 11-hour battery life, making it suitable for extended use.

SPECIFICATIONS

Feature	Detail
Brand	Edifier
Model Name	D32
Speaker Type	Bookshelf / Tabletop Wireless Speaker
Connectivity Technology	Bluetooth 5.3, Wi-Fi (Apple AirPlay 2), USB-C, AUX
Audio Output Mode	Stereo
Speaker Maximum Output Power	60 Watts RMS
Frequency Response	50 Hz
Tweeter Diameter	1 Inch

Feature	Detail
Audio Driver Type	Dynamic Driver (Dual silk dome tweeters, long-throw mid-low drivers)
Power Source	Battery Powered (7.4V/5200mAh)
Battery Life	Up to 11 hours
Control Method	Touch (Accordion Keyboard), Edifier ConneX App
Material	Wood
Color	White (This specific variant)
Product Dimensions	12.9"D x 9.7"W x 10.4"H
Item Weight	3.3 pounds (1.5 Kilograms)
Water Resistance Level	Water Repellent (Not Waterproof)

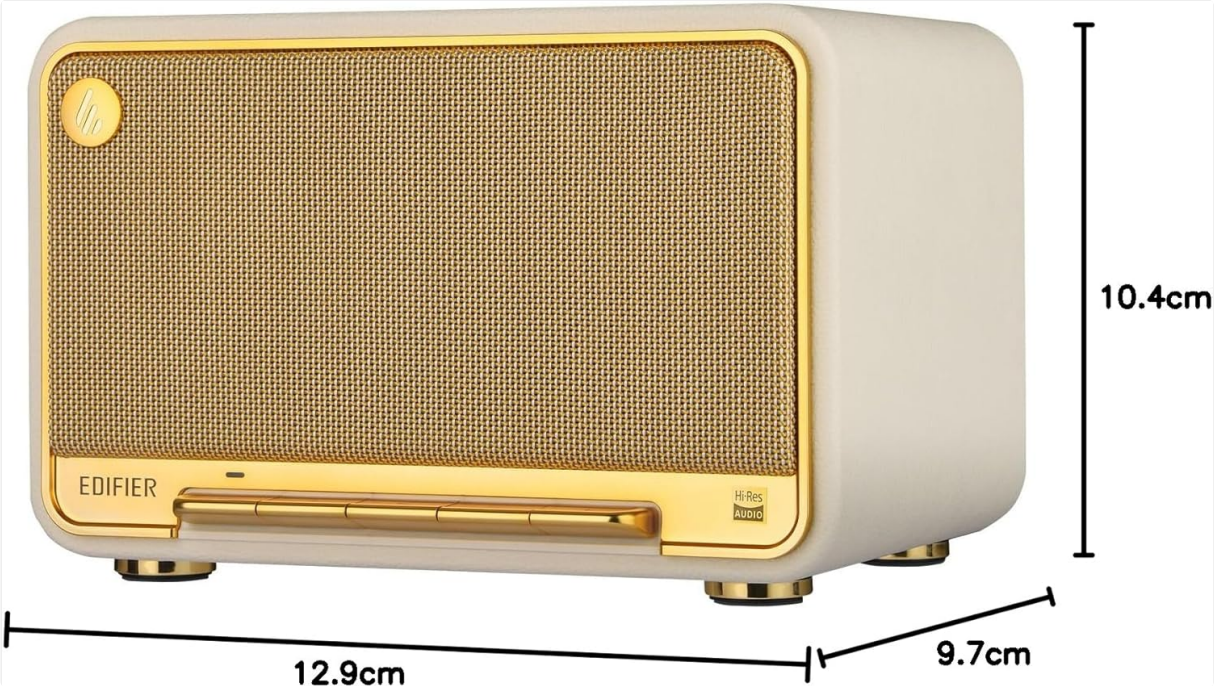


Image: Dimensions of the Edifier D32 speaker for placement reference.

MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the speaker's surfaces. Avoid abrasive cleaners or solvents.
- **Storage:** Store the speaker in a cool, dry place away from direct sunlight and extreme temperatures.
- **Water Exposure:** The speaker is water repellent, not waterproof. Avoid exposing it to excessive moisture or submerging it in water.

TROUBLESHOOTING

No Power:
Ensure the power cable is securely connected to both the speaker and a working power outlet. Check if the battery is charged.

No Sound:

Verify the speaker is powered on and the volume is not muted or set too low. Check the audio source connection (Bluetooth, Wi-Fi, USB-C, AUX) and ensure the correct input source is selected on the speaker.

Bluetooth Pairing Issues:

Ensure the speaker is in Bluetooth pairing mode (flashing indicator light). Move the speaker closer to your device and away from potential interference. Try unpairing and re-pairing the device.

Wi-Fi/AirPlay 2 Connectivity Problems:

Confirm your Wi-Fi network is active and the speaker is within range. Restart your router and the speaker.
Reconfigure Wi-Fi settings using the Edifier ConneX app.

Distorted Sound:

Reduce the volume on both the speaker and the audio source. Check audio cables for damage if using a wired connection. Adjust EQ settings in the Edifier ConneX app if necessary.


WARRANTY AND SUPPORT

The Edifier D32 Tabletop Wireless Speaker comes with a Limited Warranty. For detailed warranty information, please refer to the warranty card included in your package or visit the official Edifier website. For technical support, troubleshooting assistance, or service inquiries, please contact Edifier customer support through their official channels.


Manufacturer: Edifier

© 2024 Edifier. All rights reserved.

Related Documents - D32

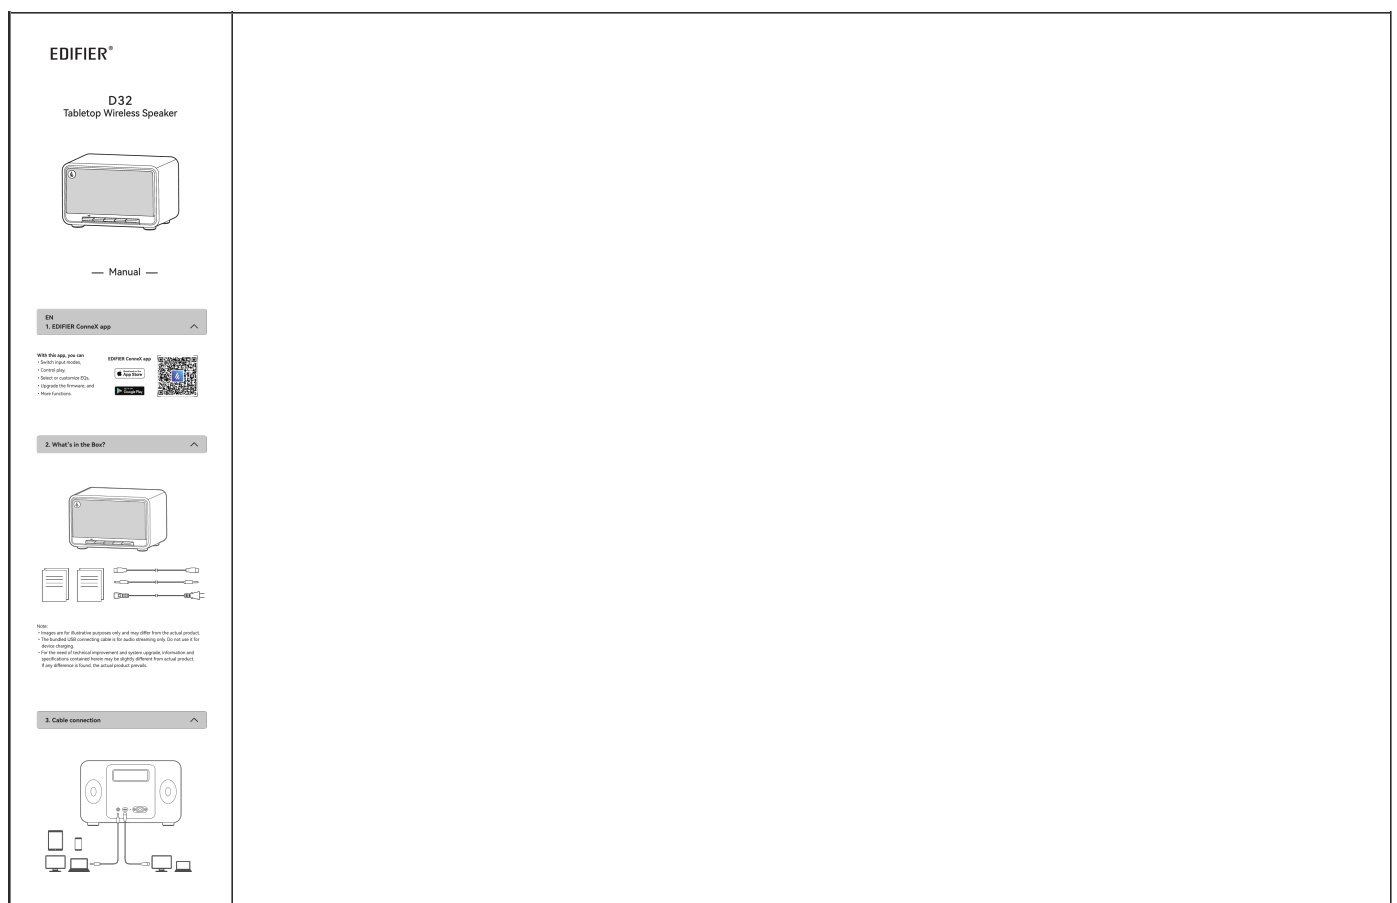


4. Power on/off



Press and hold the "U" button to power on/off the product.

Note:
When powered by the built-in battery, the speaker will automatically power off if there is no audio playback or operation for 30 minutes.


5. Switch input modes



Press the "⏻" button to switch between four input modes. You can also press the "⏻" button to switch to Bluetooth mode.

Indicator	Input mode
Flashing in blue per 0.2s	Bluetooth pairing mode
Flashing in blue	Bluetooth hidden mode
Solid blue	Bluetooth device connected
Flashing in green	Muted in A2DP mode
Solid green	A2X mode
Flashing in white	Waiting for A2FP setup
Solid white	A2FP setup completed
Solid red	USB audio streaming mode

6. Bluetooth input



1. When the speaker is powered on for the first time, it will auto-enter Bluetooth mode.
2. You can also press the "Q" or "E" button to switch to Bluetooth mode manually. (Blue LED blinking rapidly), and the speaker will enter Bluetooth pairing mode.
3. Select "EDIFIER S12" in your device setting to connect, and the blue LED will be steady if the connection is established.
- To disconnect from the current Bluetooth device, press and hold the "E" button for 1.5 seconds.

Note:

- Pin code for connection is "0000" if needed.
- To enjoy all Bluetooth functions of this product, make sure that your audio source device supports A2DP and AVRCP profiles.
- If no device is connected in 30 minutes, the speaker will switch to Bluetooth hidden mode. In this mode, (1) new devices cannot find the speaker, but (2) for a device that exists in the pairing record of this speaker, you can select "EDIFIER D12" from its Bluetooth device list to reconnect. To exit from Bluetooth hidden mode, press the " " button.
- To disconnect from the current Bluetooth device, press and hold the " " button for 1.5 seconds.

Dual-device connection
This speaker supports the simultaneous connection of two Bluetooth devices.

1. Connect the first Bluetooth device to the speaker.
2. Press and hold the **⏮** button on the speaker for 1.5 seconds.
3. On the second Bluetooth device, select "D401ER D32" in its Bluetooth device list to connect.
4. On the first Bluetooth device, select "D401ER D32" in its Bluetooth device list to reconnect.

• Pause or stop playback on the current Bluetooth device before streaming audio.

7. Apple AirPlay



- Make sure that your device is connected to your Wi-Fi network before setup.
- The following devices are supported:
 - (1) Mac or PC with iTunes 12.8 or later;
 - (2) iPhone, iPad, and iPod touch with iOS 11.4 or later;
 - (3) Apple TV 4K or Apple TV (4th Generation) with tvOS 11.4 or later;

-



Network configuration:

Method 1: Apple WAC (Wireless Access Configuration)

1. Switch to AirPlay mode manually (white LED blinking rapidly).
2. Access the AirPlay setting on your smart device.
3. Select "ENTER OS2 mode" from the AirPlay speaker list to start the AirPlay setup.
4. Follow the on-screen instructions to complete the setup (white LED steady light).

Method 2: Apple Home App

1. Switch to AirPlay mode manually (white LED blinking rapidly).
2. Open the Apple Home App on your smart device.
3. Tap "+" and then select "Add or Scan Accessories".
4. Follow the on-screen instructions to complete the setup (white LED steady light).

Method 3: ENTER OS2 mode


1. Switch to AirPlay mode manually (white LED blinking rapidly).
2. Open the ENTER OS2 App on your smart device.
3. Tap "Input sources" and then select "AirPlay".
4. Follow the on-screen instructions to complete the setup (white LED steady light).

Disconnect from Wi-Fi network












Press and hold the **[M]** button on the speaker for 1.5 seconds.

8. USB audio streaming input

Note:
- The following operating systems support USB audio streaming: Windows 11, Windows 10, Windows 8, and Windows 7.



9. Control

Buttons	Mode	Action
	Work mode / Standby mode	Press and hold to switch between work mode and standby mode
	Work mode	Press to switch to work mode
	Bluetooth device connected	Press and hold to disconnect the current Bluetooth device
	Bluetooth lockable mode	Press to set or turn Bluetooth lockable mode on or turn Bluetooth pairing mode on
	ALX mode	Press to set or turn the speaker
	Work mode / Play mode / USB charging mode	Press to pause or resume the current track
	Waiting mode	Press and hold to disconnect from the current Wi-Fi network
	Work mode	Press to increase volume
	Work mode	Press to decrease volume
	Work mode / Waiting mode / USB charging mode	Press and hold to switch to the next track
	Work mode / Play mode / USB charging mode	Press and hold to switch to the previous track

Note:
- In **ALX** and **USB** modes, volume sync is not supported. To adjust the volume, adjust on the speaker and your device separately.

10. Charging





Peak output power: 120W
Total output power (OM3): Treble: 19W+15W, Mid-range and bass: 30W
Frequency response: 52Hz-60kHz

Frequency Band (Bluetooth): 2.402GHz ~ 2.480GHz
Frequency Band (Wi-Fi): 2.400GHz ~ 2.4835GHz, 5.15GHz ~ 5.35GHz,
5.475GHz ~ 5.725GHz, 5.725GHz ~ 5.850GHz
RF Power Output: ≤21 dBm (CISPR (5.725GHz~5.850GHz excluded))
RF Power Output: ≤14 dBm (CISPR (5.725GHz~5.850GHz))

According to 10119 of Directive 2014/53/EU, the packaging shows that this radio equipment will be subject to some restrictions when placed on the market in Belgium (BE), Bulgaria (BG), Czech Republic (CZ), Denmark (DK), Germany (DE), Estonia (EE), Ireland (IE), Europe (EU), Spain (ES), France (FR), Croatia (HR), Italy (IT), Cyprus (CY), Latvia (LV), Lithuania (LT), Luxembourg (LU), Hungary (HU), Malta (MT), Netherlands (NL), Austria (AT), Poland (PL), Portugal (PT), Slovenia (SI), Slovenia (SI), Slovakia (SK), Finland (FI), Sweden (SE), Norway (NO), the United Kingdom (in respect of Northern Ireland (UK(NI)), Iceland (IS), Liechtenstein (LI), Switzerland (CH) and Turkey (TR).

This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

To learn more about ECFER, please visit www.edfcer.com
For ECFER warranty queries, please visit the relevant country page on
www.edfcer.com and review the section titled Warranty Terms.
USA and Canada: service@edfcer.com
South America: Please visit www.edfcer.com (English) or www.edfcer.com
(Spanish/Portuguese) for local contact information.

— Manual —

With this app, you can

- Switch input modes,
- Control play,
- Select or customize EQs,
- Upgrade the firmware, and
- More functions.

Download EDEFER Connect app

1. With your smart device, scan the QR code on the quick start guide or the packaging.
- You can also search for "EDEFER Connect" in Apple App Store (iOS devices) or Google Play (Android devices).

2. Download and install the app.

How to use this app

1. Connect your smart device with the speaker via Bluetooth.
2. In Bluetooth mode, open CDFIELD Connect App on your smart device.
3. Tap the menu for settings and playback control.

Note: BLE connection between your smart device and the speaker keeps alive if the speaker is switched to other input modes than Bluetooth mode.

Note:

- Images are for illustrative purposes only and may differ from the actual product.
- The bundled USB connecting cable is for audio streaming only. Do not use it for device charging.
- For the need of technical improvement and system upgrade, information and specifications contained herein may be slightly different from actual product. If any difference is found, the actual product prevails.

Note:
When powered by the built-in battery, the speaker will automatically power off if there is no audio playback or operation for 30 minutes.

Indicator status	Speaker status
Blinking in blue per 1.2s	Bluetooth pairing mode
Blinking in blue	Bluetooth hidden mode
Solid blue	Bluetooth device connected
Blinking in green	Music in AUX mode
Solid green	AUX mode
Blinking in white	Waiting for AirPlay setup
Solid white	AirPlay setup completed
Solid red	USB audio streaming mode
Blinking in blue and green	Upgrading the firmware



- Pin code for connection is "0000" if needed.

-



- © 2007 The Authors
Journal compilation © 2007 Blackwell Publishing Ltd

-

Note:
- In A/DX mode, volume sync is not supported. To adjust the volume, adjust on the monitor and your device separately.

10. Charging
- 

Declaration for EU

This device may be restricted for use, depending on the local network.

D32
Tabletop Wireless Speaker



With this app, you can

- Switch input modes,
- Control play,
- Select or customize EQs,
- Upgrade the firmware, and
- More functions.

Download EDEFIER Connect app:

1. With your smart device, scan the QR code on the quick start guide or the packaging.
- You can also search for "EDEFIER Connect" in Apple App Store (iOS devices) or Google Play (Android devices).
2. Download and install the app.

How to use this app:

1. Connect your smart device with the speaker via Bluetooth.
2. In Bluetooth mode, open EDIFIER Connect App on your smart device.
3. Tap the menu for settings and playback control.

Note: BLE connection between your smart device and the speaker keeps alive if the

Note:

- Images are for illustrative purposes only and may differ from the actual product.
- The bundled USB connecting cable is for audio streaming only. Do not use it for device charging.
- For the need of technical improvement and system upgrade, information and specifications contained herein may be slightly different from actual product. If any difference is found, the actual product prevails.

Note:
When powered by the built-in battery, the speaker will automatically power off if there is no audio playback or operation for 30 minutes.

Indicator status	Speaker status
Blinking in blue per 6.2s	Bluetooth pairing mode
Flashlight in blue	Bluetooth hidden mode
Solid blue	Bluetooth device connected
Blinking in green	Muted in AUX mode
Solid green	AUX mode
Blinking in white	Waiting for AirPlay setup
Solid white	AirPlay setup completed
Solid red	USB audio streaming mode
Blinking in blue and green	Streaming the firmware

1. When the speaker is powered on for the first time, it will auto-enter Bluetooth pairing mode (LED blinking in blue).
 - You can also press the "🔊" or "🔌" button to switch to Bluetooth mode manually.
2. On your device, select "DAPHER D32" in its Bluetooth device list to connect, and the blue LED will be steady lit when the connection is established.
 - To disconnect from the current Bluetooth device, press and hold the "🔌" button.

Note:

- Pin code for connection is "0000" if needed.
- To enjoy all Bluetooth functions of this product, make sure that your audio source device supports A2DP and AVRCP profiles. If no device is connected in 30 minutes, the speaker will switch to Bluetooth hidden mode. The blue indicator will be in a breathing pattern. In this mode, [1] new devices cannot find the speaker, but [2] a device that exists in the pairing record of this speaker, you can select "DISPERD" from its Bluetooth device list to reconnect. To exit from Bluetooth hidden mode, press the "M" button.

Dual-device connection

This speaker supports the simultaneous connection of two Bluetooth devices.

1. Connect the first Bluetooth device to the speaker.
2. Press and hold the  button on the speaker for 1.5 seconds.
3. On the second Bluetooth device, select "EDIFIER D32" in its Bluetooth device list to connect.
4. On the first Bluetooth device, select "EDIFIER D32" in its Bluetooth device list to reconnect.


▶ Pause or stop playback on the current Bluetooth device before streaming audio from the second one.

Note:

- Make sure that your device is connected to your Wi-Fi network before setup.
- The following devices are supported:
 - (1) Mac or PC with iTunes 12.8 or later;
 - (2) iPhone, iPad, and iPod touch with iOS 11.4 or later;
 - (3) Apple TV 4K or Apple TV (4th Generation) with tvOS 11.4 or later;














Comprehensive user manual for the Edifier D32 Tabletop Wireless Speaker, detailing setup, connectivity options (Bluetooth, AirPlay, USB audio), controls, charging, specifications, and regulatory information.



- The following operating systems support USB audio streaming: Windows 11, Windows 10, Windows 8, and Windows 7.
- In USB mode, volume sync is not supported. To adjust the volume, adjust on the speaker and your device separately.



Buttons	Mode	Action
	Work mode / Standby mode	Press and hold to switch between work mode and standby mode
	Work mode	Press to switch input modes
	Bluetooth device connected	Press and hold to disconnect the current Bluetooth device
	Bluetooth hidden mode	Press to stop from Bluetooth hidden mode or start Bluetooth pairing mode
	AUX mode	Press to mute or unmute the speaker
	Bluetooth mode / AirPlay mode / USB audio streaming mode	Press to pause or resume the current mode
	AirPlay mode	Press and hold to enter AirPlay setup mode
	Work mode	Press to increase volume
	Work mode	Press to decrease volume
	Bluetooth mode / AirPlay mode / USB audio streaming mode	Press and hold to switch to the next track
	Bluetooth mode / AirPlay mode / USB audio streaming mode	Press and hold to switch to the previous track

- In AUX mode, volume sync is not supported. To adjust the volume, adjust on the speaker and your device separately.

- Power input: 180-240V~ 50/60Hz 0.5A
- This plug type is meant for illustration purpose only.
- The indicator light is solid red when charging and turns off when the battery is full.
- You can play music on the speaker while charging.

Total output power (RMS): Treble: 15W+15W, Mid-range and bass: 30W
Frequency response: 52Hz-40kHz

Total output power (RMS): Treble: 15W+15W, Mid-range and bass: 30W
Frequency response: 52Hz-40kHz

Frequency Band (Bluetooth): 2.402GHz ~ 2.480GHz
Frequency Band (Wi-Fi): 2.400GHz ~ 2.4835GHz, 5.150GHz ~ 5.350GHz,
5.470GHz ~ 5.725GHz, 5.725GHz ~ 5.850GHz
RF Power Output: ≤30 dBm (EIRP) (5.725GHz~5.850GHz excluded)
RF Power Output: ≤14 dBm (EIRP) (5.725GHz~5.850GHz)

This device may be used for its intended use, depending on the local network restrictions in the 5044 band.

According to 10(1)(b) of Directive 2014/53/EU, the packaging shows that this radio equipment will be subject to some restrictions when placed on the market in Belgium (BE), Bulgaria (BG), Czech Republic (CZ), Denmark (DK), Germany (DE), Estonia (EE), Ireland (IE), Greece (EL), Spain (ES), France (FR), Croatia (HR), Italy (IT), Lithuania (LT), Latvia (LV), Lithuania (LT), Luxembourg (LU), Hungary (HU), Malta (MT), Netherlands (NL), Austria (AT), Poland (PL), Portugal (PT), Romania (RO), Slovenia (SI), Slovakia (SK), Finland (FI), Sweden (SE), Norway (NO), the United Kingdom in respect of Northern Ireland (UK(NI)), Iceland (IS), Liechtenstein (LI), Switzerland (CH) and the Åland Islands.

The WLAN function for this device is restricted to indoor use due to its operation in the 5.15 to 5.35 GHz frequency range.

to learn more about EDIFIER, please visit www.edifier.com
For EDIFIER warranty queries, please visit the relevant country page on
www.edifier.com and review the section titled Warranty Terms.
USA and Canada: service@edifier.com
South America: Please visit www.edifier.com (English) or www.edifier.com
(Spanish/Portuguese) for local contact information.


EN
1. EDIFIER CASSA Y 3000

- With this app, you can
 - Switch input modes,
 - Control play,
 - Select or customize EQs,
 - Upgrade the firmware, and
 - More functions.

Download EEFIER Connect app:
 1. With your smart device, scan the QR code on the quick start guide or the package.
 2. You can also search for "EEFIER Connect" in Apple App Store (iOS devices) or Google Play (Android devices).
 3. Download and install the app.

Note: BLE connection between your smart device and the speaker keeps alive if the speaker is switched to other input modes than Bluetooth mode.

2. What's in the Box?




9. Control

Action	Note	Action
Power button (standby mode)	Press and hold to switch between work mode and standby mode.	
Back button	Press to switch between modes.	
Bluetooth device connected	Press and hold to disconnect the current Bluetooth device.	
Bluetooth volume mode	Press to use and hold Bluetooth volume mode and Bluetooth volume mode.	
AUX mode	Press to make to make the speaker.	
Bluetooth mode (AirPlay mode) / USB audio listening mode	Press to listen to music from the current mode.	
AirPlay mode	Press to listen to music from the current mode.	
AUX mode	Press to listen to music from the current mode.	
Back mode	Press to listen to music from the current mode.	
Bluetooth mode (AirPlay mode) / USB audio listening mode	Press to listen to music from the current mode.	
Bluetooth mode (AirPlay mode) / USB audio listening mode	Press to listen to music from the current mode.	

Note: In AUX mode, volume type is not supported. To adjust the volume, adjust on the speaker and your device separately.

10. Charging



Note:
- Please input 100-240V~50/60Hz 0.3A.
- This plug type is used for EU standard equipment only.
- The volume button is used to adjust the volume and turn off when the battery is full.
- You can play music on the speaker while charging.

11. Specifications


Total output power (RMS): 10W+10W, Mid-range and bass: 30W
Frequency response: 52Hz-20KHz

Declaration for EU:
Frequency Band (Bluetooth): 2.402GHz - 2.483GHz
Frequency Band (FM): 2.402GHz - 2.483GHz, 5.18GHz - 5.88GHz
5.4GHz - 5.725GHz, 5.725GHz - 5.88GHz
RF Power Output: 400 dBm (EIRP) (2.402GHz - 2.483GHz) maximum
RF Power Output: 114 dBm (EIRP) (5.18GHz - 5.88GHz)

This device may be marketed for sale, depending on the local market.
Restrictions in the EU:
According to CE mark (Directive 2014/53/EU), the packaging shows that this radio equipment will be subject to some restrictions when placed on the market in:
Belgium (BE), Bulgaria (BG), Czech Republic (CZ), Denmark (DK), Germany (DE), France (FR), Greece (GR), Hungary (HU), Ireland (IE), Italy (IT), Latvia (LV), Lithuania (LT), Luxembourg (LU), Malta (MT), Netherlands (NL), Austria (AT), Poland (PL), Portugal (PT), Romania (RO), Slovakia (SK), Slovenia (SI), Spain (ES), Sweden (SE), Switzerland (CH), Turkey (TR), United Kingdom (UK), and the United States (US).
The CE mark for this device is restricted to indoor use due to its operation in the 2.4 GHz ISM frequency range.
This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.
To learn more about CE mark, please visit www.ce-mark.com.
The CE mark is a safety symbol and the relevant country page on www.ce-mark.com and www.ce-mark.com.
CE mark and CE mark: www.ce-mark.com
CE mark and CE mark: www.ce-mark.com
CE mark and CE mark: www.ce-mark.com
CE mark and CE mark: www.ce-mark.com

[Edifier D32 Tabletop Wireless Speaker Quick Start Guide](#)

Quick start guide for the Edifier D32 Tabletop Wireless Speaker, covering setup, connections (Bluetooth, USB, AUX, AirPlay), controls, charging, and technical specifications.



[EDIFIER D32 Tabletop Wireless Speaker User Manual](#)

User manual for the EDIFIER D32 Tabletop Wireless Speaker, covering setup, features, Bluetooth, AirPlay, USB audio, controls, charging, and specifications.

