AUSDOM AUSDOM 98Pro-Manga Girl Theme

AUSDOM 98Pro Wireless Mechanical Keyboard User Manual

Model: AUSDOM 98Pro-Manga Girl Theme

Brand: AUSDOM

Introduction

Thank you for choosing the AUSDOM 98Pro Wireless Mechanical Keyboard. This keyboard is designed to enhance your typing and gaming experience with its versatile connectivity options, customizable features, and ergonomic design. This manual provides detailed instructions to help you set up, operate, and maintain your new keyboard.

Key features include:

- **Multi-device Connection:** Supports BT5.0, 2.4GHz wireless, and USB wired connections, allowing switching between up to 5 devices.
- **Pleasant Typing Experience:** Gasket structure design for improved acoustics and a dual-height stand for ergonomic comfort.
- **Hot Swappable:** Easily replace keycaps and mechanical switches without disassembling the keyboard.
- **Adjustable Backlight System:** 16 lighting effects and 4 backlight levels for various environments.
- **Durable PBT Keycaps:** Wear-resistant and oil-resistant for long-lasting clarity.
- **Mac/Win Compatibility:** Seamless switching between operating systems.

What's in the Box

Please check the contents of your package to ensure all items are present:

- Wireless Mechanical Keyboard x1
- USB Receiver x1
- Type-C Charging Cable x1
- Instruction Manual x1

- Mechanical Switch x3
- Switch Puller x1
- Animation Sticker x1



Image: The AUSDOM 98Pro keyboard and its included accessories, such as the USB receiver, Type-C cable, and instruction manual.

Setup

Charging the Keyboard

Before first use, fully charge the keyboard using the provided Type-C cable. Connect the Type-C end to the keyboard's port and the USB-A end to a power source (e.g., computer USB port, USB wall adapter).

Connection Modes

The AUSDOM 98Pro keyboard supports three connection modes: Bluetooth, 2.4GHz Wireless, and USB-C Wired.



Image: The keyboard connected to multiple devices via Bluetooth, 2.4GHz wireless, and USB-C wired connections.

1. 2.4GHz Wireless Connection

1. Locate the USB receiver included in the package.
2. Plug the USB receiver into an available USB port on your computer.
3. On the keyboard, switch the mode selector to 2.4G mode. The keyboard should automatically connect.

2. Bluetooth Connection

The keyboard can store up to 3 Bluetooth profiles (BT1, BT2, BT3).

1. On the keyboard, switch the mode selector to Bluetooth mode.
2. Press and hold **FN + 1** (for BT1), **FN + 2** (for BT2), or **FN + 3** (for BT3) for 3-5 seconds until the indicator light flashes rapidly, indicating pairing mode.
3. On your device (computer, tablet, phone), enable Bluetooth and search for new devices.

4. Select "AUSDOM 98Pro" from the list of available devices to pair.
5. Once connected, the indicator light will stop flashing.

3. USB-C Wired Connection

1. Connect the provided Type-C cable to the keyboard's Type-C port.
2. Connect the USB-A end of the cable to an available USB port on your computer.
3. The keyboard will automatically switch to wired mode and be ready for use.

Operating Instructions

Function Key Combinations (FN Key)

The FN key allows access to various secondary functions and controls.

- **FN + Q/W/E/R/T:** Switch between paired Bluetooth devices (BT1, BT2, BT3) or 2.4G/Wired mode. (Specific mapping may vary, refer to keyboard legends).
- **FN + O/P:** Switch between Mac and Windows layouts.
- **FN + WIN:** Lock/Unlock Windows key to prevent accidental presses during gaming.
- **FN + Backspace:** Check battery level (not supported in wired mode).

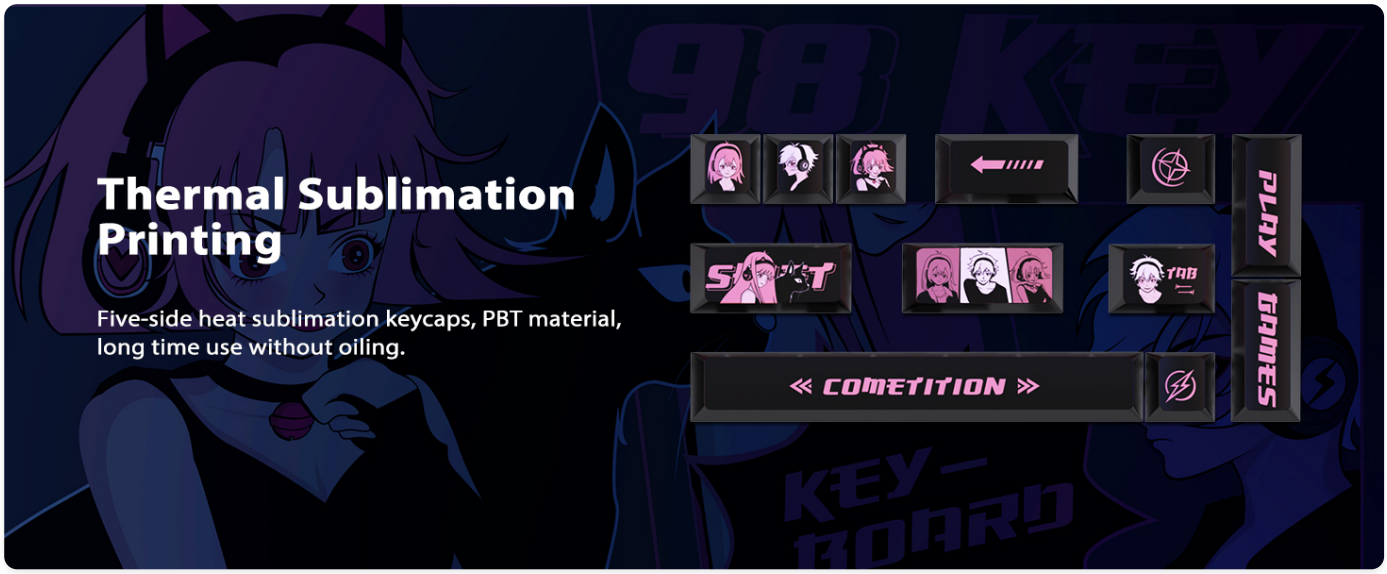


Image: Instructions for switching between Mac and Windows keyboard layouts using FN key combinations.

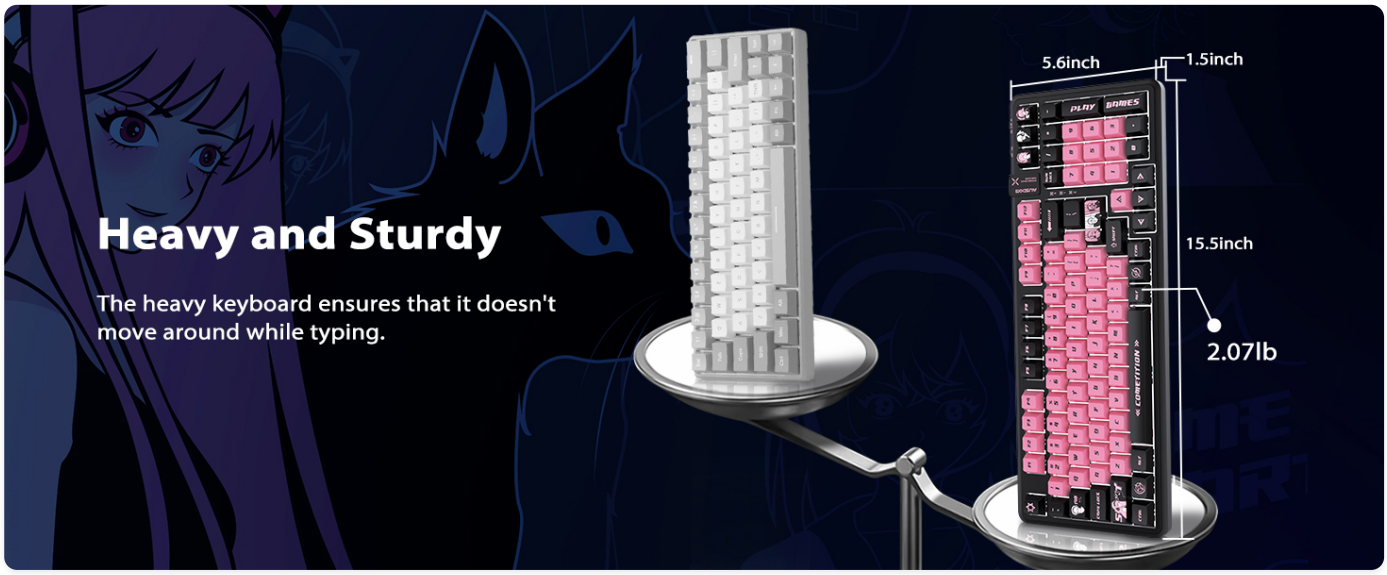


Image: Illustration of the 97-key anti-ghosting feature and how to lock the Windows key.

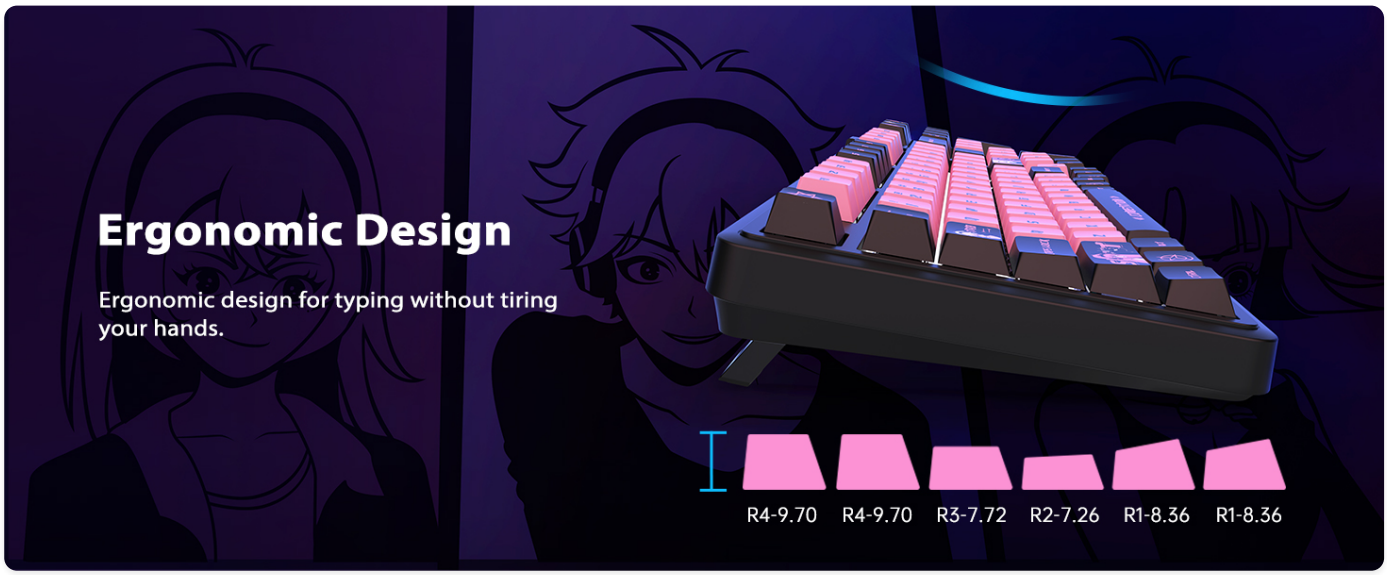


Image: Visual guide for checking the keyboard's battery level.

Backlight Control

The keyboard features adjustable backlighting with multiple effects.

- **FN + < / >:** Change backlight levels (4 levels).
- **FN + V:** Change backlight effects (16 kinds).



Image: Controls for adjusting backlight brightness and cycling through different lighting effects.

Hot-Swappable Feature

The AUSDOM 98Pro keyboard supports hot-swappable switches, allowing you to change mechanical switches without soldering.

- Use the included switch puller to carefully remove existing switches.
- Align the pins of the new 3-pin or 5-pin switch with the holes on the PCB and gently press it into place until it clicks.



Image: Demonstration of the hot-swappable design, showing how switches can be easily replaced.

Programmable Software

Customize key functions, macros, and lighting effects using the dedicated software. The software only supports the Windows system and customization in wired and 2.4G modes.

- Download the driver from the official AUSDOM website.
- Install the software and follow the on-screen instructions for customization.



Image: The programmable software interface for customizing keyboard settings.

Maintenance

Cleaning the Keyboard

To ensure longevity and hygiene, regular cleaning is recommended:

- Disconnect the keyboard from all power sources and devices.
- Use a soft, lint-free cloth slightly dampened with water or a mild cleaning solution to wipe the keycaps and surface.
- For deeper cleaning, you may carefully remove keycaps using a keycap puller (not included) and clean underneath with compressed air or a small brush.
- Ensure the keyboard is completely dry before reconnecting.

Keycap and Switch Replacement

As the keyboard is hot-swappable, you can easily replace keycaps and switches:

- To remove keycaps, use a keycap puller to gently pry them off.
- To remove switches, use the provided switch puller to grip and pull the switch straight up.
- When installing new keycaps or switches, ensure they are properly aligned before pressing them down to avoid damage.

Troubleshooting

If you encounter issues with your AUSDOM 98Pro keyboard, please refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Keyboard not connecting (2.4GHz)	USB receiver not plugged in; keyboard not in 2.4G mode; interference.	Ensure receiver is firmly plugged in. Switch keyboard to 2.4G mode. Try a different USB port. Move closer to the receiver.
Keyboard not connecting (Bluetooth)	Not in pairing mode; device Bluetooth off; incorrect profile selected.	Press FN + 1/2/3 to enter pairing mode. Ensure Bluetooth is enabled on your device. Select the correct profile.
Keys not responding or double-typing	Loose switch; software issue; low battery.	Check if switches are fully seated. Recharge the keyboard. Try resetting the keyboard (if applicable, refer to software).
Backlight not working or dim	Backlight turned off; low battery; software setting.	Press FN + < / > to adjust brightness. Recharge the keyboard. Check software settings.
Mac/Win layout incorrect	Incorrect layout selected.	Press FN + O (for Mac) or FN + P (for Windows) to switch layouts.

If the problem persists after trying these solutions, please contact AUSDOM customer support for further assistance.

Specifications

Feature	Detail
Product Dimensions	15.51 x 5.59 x 1.46 inches
Item Weight	3.72 pounds
Manufacturer	AUSDOM

Feature	Detail
Item Model Number	AUSDOM 98Pro-Manga Girl Theme
Batteries	1 Lithium Polymer battery (included)
Connectivity Technology	2.4G, Bluetooth, USB-C
Keyboard Description	Mechanical
Recommended Uses	Gaming
Special Features	3-Mode Connection, Backlit, Ergonomic, Gasket Structure Design, Hot-Swappable
Color	Pink
Number of Keys	97

Warranty and Support

Warranty Information

AUSDOM products are manufactured to high quality standards. For specific warranty terms and conditions, please refer to the warranty card included with your product or visit the official AUSDOM website. Keep your purchase receipt as proof of purchase for warranty claims.

Customer Support

If you have any questions, require technical assistance, or need to report an issue with your AUSDOM 98Pro keyboard, please contact AUSDOM customer support. Contact details can typically be found on the official AUSDOM website or on the product packaging.

© 2024 AUSDOM. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question