

Yunseity Yunseityx3hdcwis

Yunseity 1080P Video Door Viewer User Manual

Model: Yunseityx3hdcwis

1. INTRODUCTION

The Yunseity 1080P Video Door Viewer is a smart security device designed to enhance home safety. It features a 1080P camera, a 4.3-inch color monitor, two-way audio communication, night vision, and PIR motion detection. This manual provides detailed instructions for the installation, operation, and maintenance of your video door viewer.

2. PRODUCT OVERVIEW

2.1 Key Features

- **1080P HD Camera:** Captures clear video with a 120° wide-angle lens.
- **4.3-inch Color Monitor:** Provides a clear view of visitors.
- **Two-Way Talk:** Communicate with visitors via the mobile app.
- **Night Vision:** Automatic switching for clear visibility in low light conditions (up to 2 meters).
- **PIR Motion Detection:** Sends push notifications and records video upon detecting movement.
- **Mobile App Control:** View live feed, make video calls, take snapshots, and record sound remotely.
- **Storage:** Supports up to 128GB memory card (not included) for recordings.
- **Long Standby Time:** Equipped with a 5000mAh battery, offering up to 30 days standby.
- **Language Support:** English and Chinese.

2.2 Components

The package includes the following components:

- Indoor Display Unit (4.3-inch monitor)
- Outdoor Peephole Camera Unit
- Mounting Bracket
- USB Charging Cable
- Mounting Screws (various lengths)



Image: All components included in the Yunseity Video Door Viewer package, including the indoor monitor, outdoor camera, mounting bracket, USB cable, and screws.

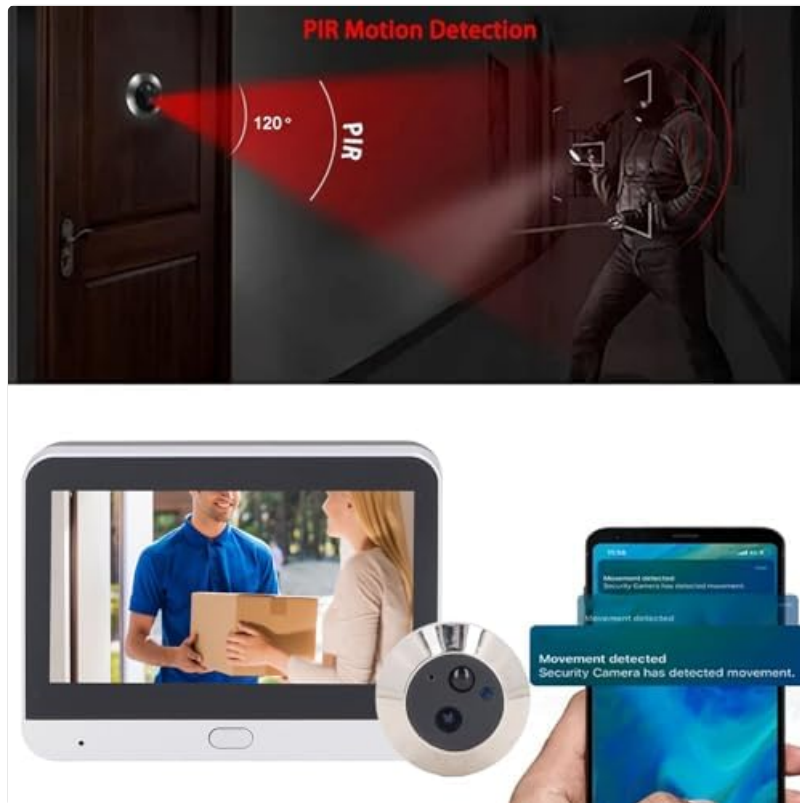


Image: The Yunseity Video Door Viewer indoor unit, outdoor camera, and various accessories like the USB cable and mounting hardware.

3. SETUP AND INSTALLATION

Follow these steps to install your Yunseity Video Door Viewer:

1. **Step 1: Select Screws.** Choose two screws that match the thickness of your door. Insert the screws into the bolt machine of the outdoor camera unit.
2. **Step 2: Thread Cable.** At the door, thread the camera cable through the existing peephole opening.
3. **Step 3: Position Camera and Bracket.** Straighten out the camera cable. Thread the screw from the outdoor camera through the hanging plate (mounting bracket).
4. **Step 4: Tighten Screws.** Securely tighten the screws to fix the hanging plate to the door.
5. **Step 5: Connect and Cover.** Buckle the upper wire protection cover over the cable connection.

6. **Step 6: Mount Indoor Unit.** Attach the indoor display unit to the hanging plate. The system is now ready for use after installation.



Image: A six-step visual guide demonstrating the installation process of the Yunseity Video Door Viewer, from selecting screws to mounting the indoor unit.

3.1 Wi-Fi Connection and App Setup

1. **Download App:** Download the official mobile application for the Yunseity Video Door Viewer from your device's app store.
2. **Reset Device:** Hold the reset button on the indoor unit for a few seconds until you hear a prompt.
3. **Scan QR Code:** Open the mobile app and follow the instructions to scan the QR code displayed on the door viewer's screen.
4. **Follow Prompts:** Follow the voice prompts and on-screen instructions in the app to complete the Wi-Fi connection and device pairing.
5. **User Sharing:** The app allows for user sharing, enabling multiple family members to access the door viewer.

Important Note: Avoid using usernames longer than 32 characters, or containing special characters or Chinese characters, as this may affect the successful setup and operation of the device.



Image: Illustration showing the Yunseity Video Door Viewer connecting via Wi-Fi to a smartphone for remote monitoring and communication.

4. OPERATING INSTRUCTIONS

4.1 Live View and Two-Way Talk

- Open the mobile app to view the live feed from the outdoor camera.
- When a visitor presses the doorbell or motion is detected, you will receive a notification on your phone.
- Tap the notification to answer and engage in two-way audio communication with the visitor.
- The app also allows you to take snapshots or record video during a live view.

4.2 PIR Motion Detection and Recording

- The built-in PIR sensor detects human movement near your door.
- Upon detection, the device will automatically record video and send a push notification to your mobile phone.
- Recordings are stored on the installed memory card (up to 128GB, not included) or can be saved to your mobile device via the app.
- The sensitivity of the motion detection can be adjusted in the app settings.

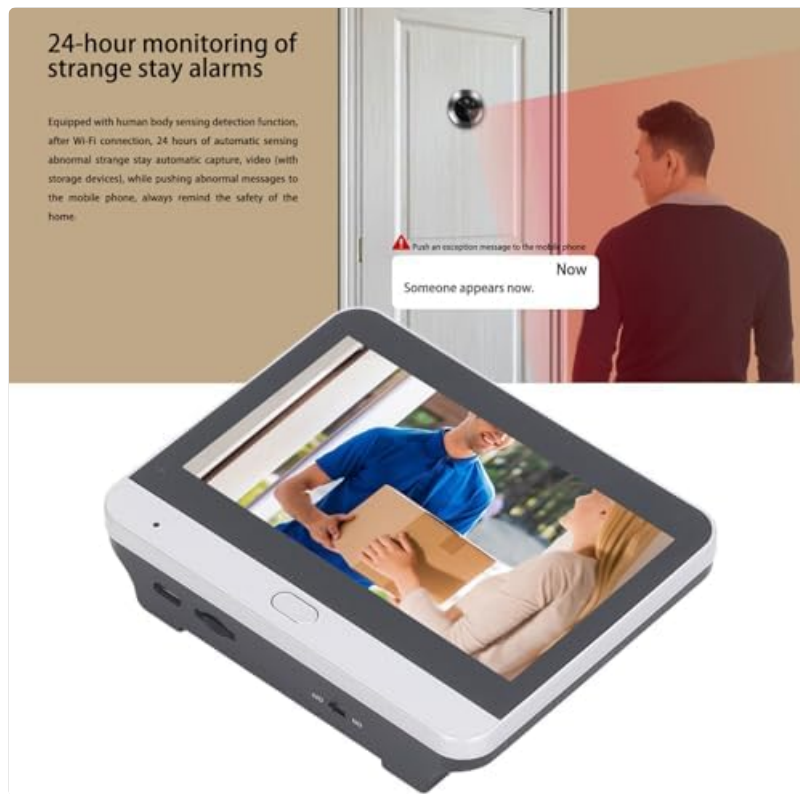


Image: The Yunseity Video Door Viewer providing 24-hour monitoring with motion detection, alerting the user via a mobile notification when someone approaches the door.

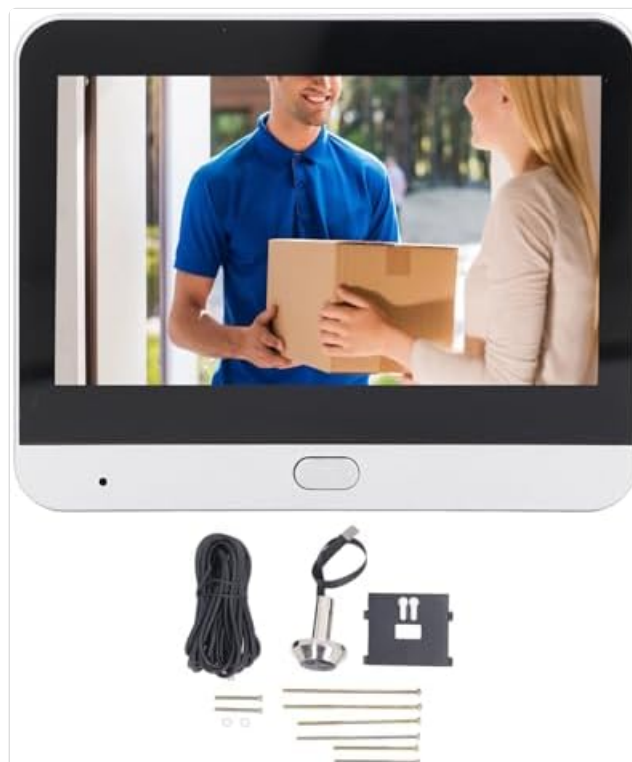


Image: A visual representation of the PIR motion detection feature, showing the detection zone and a mobile phone receiving an alert when movement is detected.

4.3 Night Vision

The camera automatically switches to night vision mode in low light conditions, ensuring clear visibility of visitors even in complete darkness. The effective range for night vision is up to 2 meters.

4.4 Language Settings

The device supports English and Chinese. You can select your preferred language through the device settings or the mobile application.

4.5 Battery and Charging

- The indoor unit is powered by a 5000mAh rechargeable battery.
- A low battery reminder will be displayed on the screen and sent to your mobile app when the battery level is critical.
- Charge the device using the provided USB cable and a standard USB power adapter (not included). The USB port is located on the indoor unit.



Image: An infographic summarizing key features such as dual-way communication, wide-angle HD vision, motion detection, user sharing, and 5000mAh battery life with low battery prompt.

5. MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the indoor monitor and outdoor camera lens. Do not use liquid cleaners or abrasive materials.
- **Battery Care:** Recharge the battery when the low battery alert appears. Avoid completely draining the battery frequently to prolong its lifespan.
- **Firmware Updates:** Check the mobile app periodically for any available firmware updates to ensure optimal performance and security.
- **Storage Card:** If using a memory card, ensure it is properly inserted and periodically check its storage capacity. Format the card if necessary (this will erase all data).

6. TROUBLESHOOTING

- **Device Not Connecting to Wi-Fi:**

- Ensure your Wi-Fi network is 2.4GHz. This device may not support 5GHz networks.
- Check that the Wi-Fi password is entered correctly.
- Make sure the device is within range of your Wi-Fi router.
- Reset the device and try the setup process again.
- Avoid using Wi-Fi usernames (SSID) or passwords with special characters or Chinese characters, or those longer than 32 characters.

- **No Motion Detection Alerts:**

- Verify that PIR motion detection is enabled in the app settings.
- Adjust the motion detection sensitivity in the app.
- Ensure the camera lens is clean and unobstructed.

- **Poor Video Quality:**

- Check your Wi-Fi signal strength. A weak signal can affect video streaming quality.
- Clean the camera lens.
- Ensure adequate lighting for optimal daytime video.

- **Two-Way Talk Issues:**

- Ensure your phone's microphone is enabled for the app.
- Check the volume settings on both your phone and the indoor unit.
- Ensure a stable internet connection for clear audio.

- **Battery Drains Quickly:**

- Frequent motion detection events or live view sessions will consume more battery.
- Ensure the device is fully charged.
- Reduce motion detection sensitivity if you are receiving excessive alerts.

7. SPECIFICATIONS

Brand	Yunseity
Model Name	Yunseitytx3hdcwis
Special Features	Motion Sensor, Night Vision
Compatible Devices	Smartphone
Connectivity Protocol	Wi-Fi
Controller Type	Android (App-controlled)
Mount Type	Wall Mount (Peephole)
Alert Type	Motion Only
Wireless Technology	Wi-Fi
Batteries Required	No (Internal rechargeable battery)
Battery Power	5000 mAh

Focus Type	Manual Focus
Video Capture Resolution	1080p
Video Capture Format	MPEG-4
Unit Count	1.0 Count

8. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the documentation provided with your purchase or contact the seller directly. Specific warranty terms and support channels may vary.