

[manuals.plus](#) /

› [Rfiver](#) /

› [Rfiver Mobile TV Stand MT200 User Manual for 32-70 Inch TVs](#)

Rfiver MT200

Rfiver Mobile TV Stand MT200 User Manual

Model: MT200 | For 32-70 Inch TVs

1. INTRODUCTION

This manual provides essential information for the safe and correct assembly, operation, and maintenance of your Rfiver Mobile TV Stand MT200. Please read all instructions carefully before beginning assembly and retain this manual for future reference.

Safety Information

- Ensure all parts are present and undamaged before assembly. Do not use if any parts are missing or defective.
- Do not exceed the maximum load capacity of 40 kg (88 lbs) for the TV and 10 kg (22 lbs) for the media shelf.
- This stand is designed for TVs between 32 and 70 inches.
- Always ensure the casters are locked when the stand is in a stationary position to prevent accidental movement.
- Assembly should be performed by at least two people for safety.



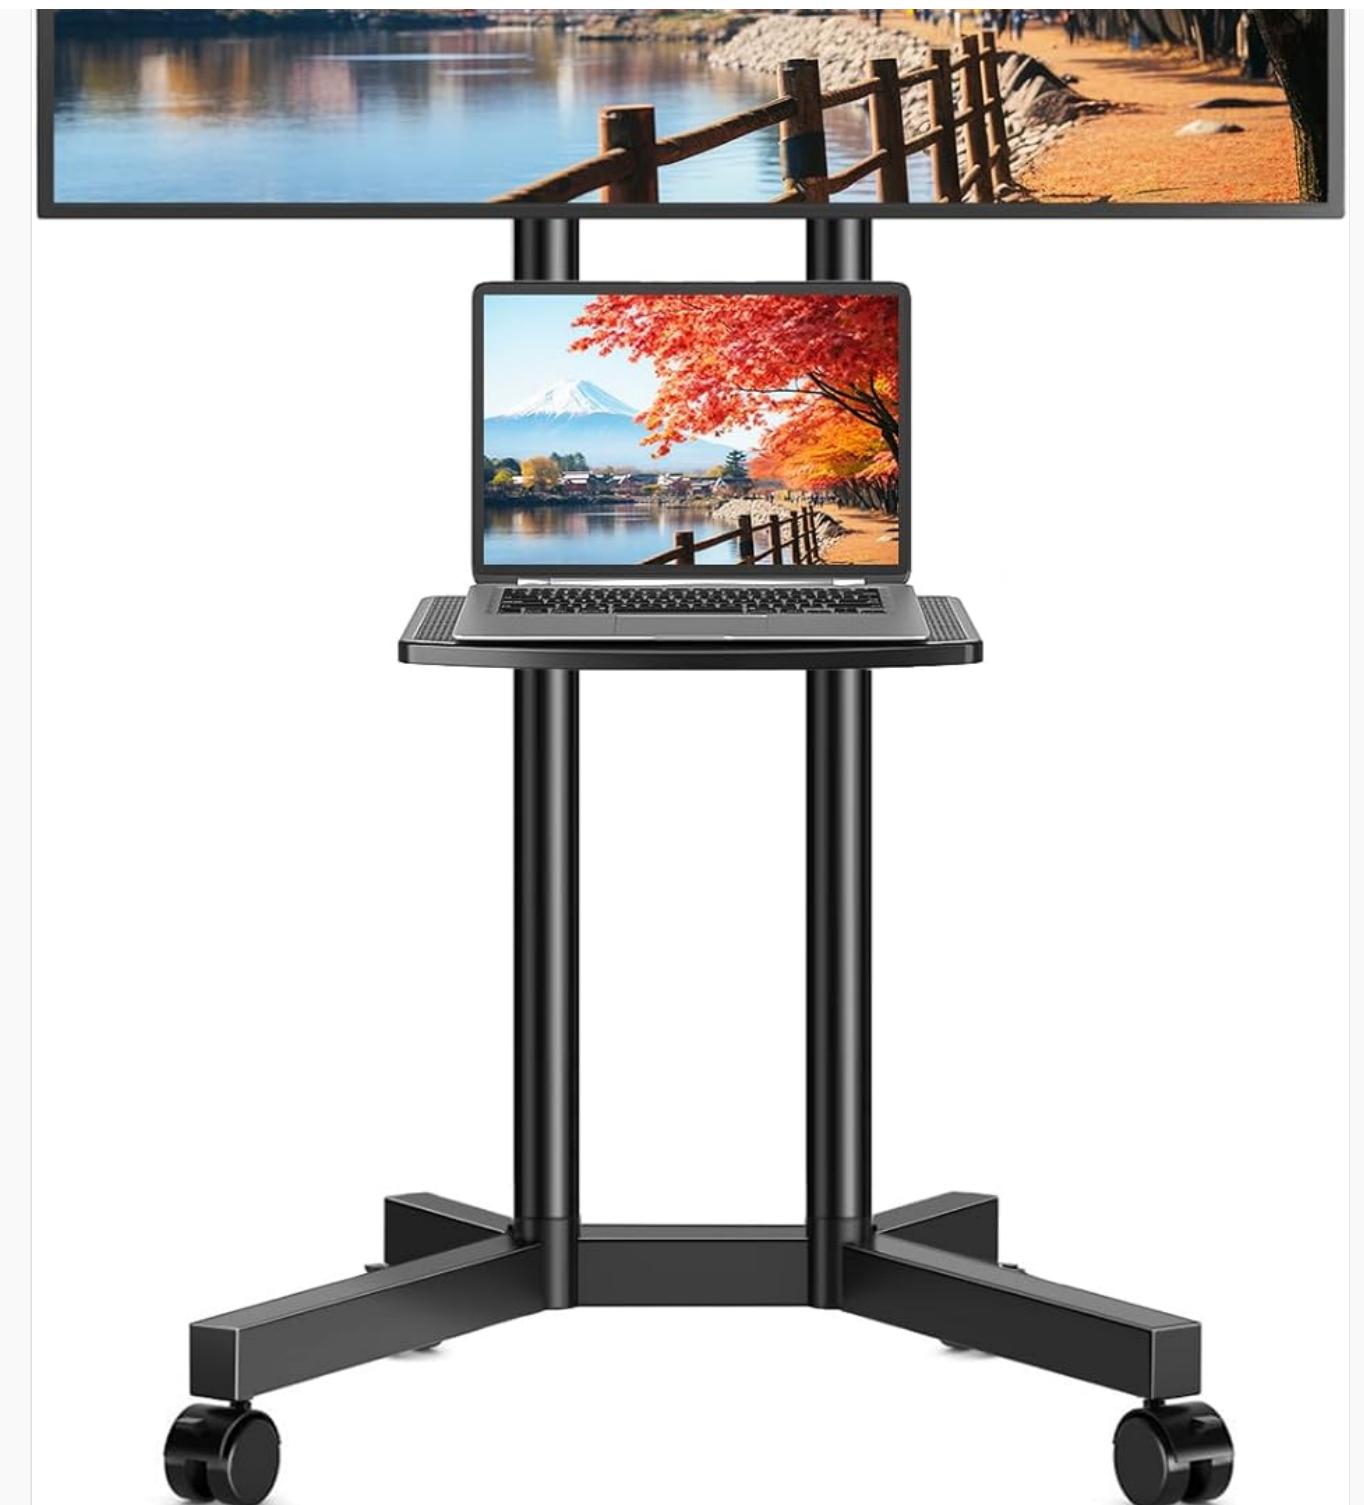


Image 1.1: Overview of the Rriver Mobile TV Stand MT200 with a TV and laptop.

2. PACKAGE CONTENTS

Verify that all components listed below are included in your package. If any parts are missing or damaged, please contact customer support.

- Base (X-shaped)
- Vertical Support Pillars (2)
- TV Mounting Bracket
- Media Shelf
- Casters (4, with locking mechanism)

- Hardware Kit (various screws, washers, spacers, Allen wrench)
- Cable Management Clips



Image 2.1: Key features and components of the TV stand.

3. SETUP INSTRUCTIONS

Follow these steps carefully to assemble your Rfiver Mobile TV Stand.


3.1 VESA Compatibility and TV Requirements

Before assembly, ensure your TV meets the following criteria:


- **Screen Size:** 32 to 70 inches
- **Weight Capacity:** Maximum 40 kg (88 lbs)
- **VESA Pattern:** Compatible with VESA patterns from 100x100 mm to 400x400 mm. (e.g., 100x100, 200x100, 200x200, 300x200, 400x200, 300x300, 400x300, 400x400 mm).

適合条件

下記条件を満たすテレビ(モニター)の取り付けが可能です

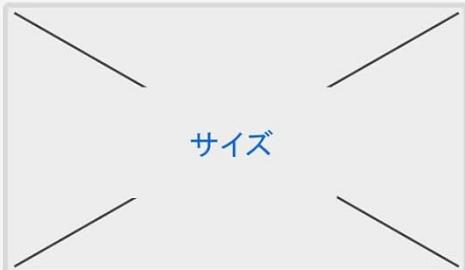

32~70インチ

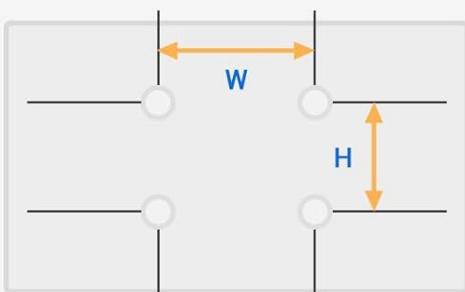

VESA規格

100 x 100 mm	300 x 300 mm
200 x 100 mm	400 x 200 mm
200 x 200 mm	400 x 300 mm
300 x 200 mm	400 x 400 mm

ネジ穴対応範囲



40kg

Image 3.1: VESA mounting hole patterns, compatible TV sizes, and maximum load capacity.

3.2 Assembly Steps

- Assemble the Base:** Attach the four casters to the X-shaped base using the provided screws. Ensure they are securely tightened.
- Attach Vertical Pillars:** Secure the two vertical support pillars to the assembled base using the designated hardware.
- Install TV Mounting Bracket:** Attach the TV mounting bracket to the top of the vertical pillars. Ensure it is oriented correctly and securely fastened.
- Mount the TV:** Carefully attach the TV to the mounting bracket. Use the appropriate screws and spacers from the hardware kit that match your TV's VESA pattern. Ensure the TV is centered and level.
- Install Media Shelf:** Attach the media shelf to the vertical pillars at your desired height. The shelf is adjustable and can hold devices up to 10 kg.



Image 3.2: Detailed dimensions and load capacities of the stand and shelf.

4. OPERATING INSTRUCTIONS

4.1 Height Adjustment

The Rriver Mobile TV Stand offers flexible height adjustment for optimal viewing.

- **Overall Height:** The stand's total height can be adjusted from 112.2 cm to 142.2 cm.
- **TV Plate Adjustment:** The TV plate has 5 adjustable height levels.
- **Bracket Adjustment:** The TV mounting brackets have 3 adjustable height levels.

To adjust the height, loosen the securing bolts on the vertical pillars and TV plate/brackets, slide to the desired height, and re-tighten all bolts securely.



Image 4.1: Height adjustment options for the TV plate and mounting brackets.

4.2 Mobility and Stability

The stand is equipped with four 360° rotating casters for easy movement. Each caster includes a stopper for stability.

- **Moving the Stand:** Unlock all four casters by flipping their stoppers upwards. Gently push the stand to its new location.
- **Securing the Stand:** Once in the desired position, lock all four casters by pressing their stoppers downwards to prevent unintended movement.



Image 4.2: Detail of the 360° rotating casters with locking function.

4.3 Cable Management

Integrated cable management clips help keep your cables organized and out of sight, contributing to a tidy setup.

- Route TV and device cables along the vertical pillars.
- Use the provided cable management clips to secure the cables neatly to the pillars.

5. MAINTENANCE

Regular maintenance ensures the longevity and safe operation of your TV stand.

- **Cleaning:** Wipe the stand with a soft, dry cloth. For stubborn marks, use a slightly damp cloth and mild detergent, then dry thoroughly. Avoid abrasive cleaners.
- **Check Connections:** Periodically check all screws and bolts to ensure they remain tight. Re-tighten if necessary.
- **Caster Functionality:** Keep casters free of debris to ensure smooth movement. Lubricate if needed.

6. TROUBLESHOOTING

If you encounter any issues, refer to the following common problems and solutions:

- **Stand is unstable:**

- Ensure all screws and bolts are securely tightened.
- Verify the TV weight does not exceed 40 kg and is centered on the bracket.
- Ensure the stand is on a flat, level surface.

- **Difficulty moving the stand:**

- Check that all casters are unlocked.
- Clean any debris from the caster wheels.
- If casters are stiff, apply a small amount of lubricant.

- **TV does not fit the bracket:**

- Re-check your TV's VESA pattern against the stand's compatibility (100x100mm to 400x400mm).
- Ensure you are using the correct screws and spacers from the hardware kit.

- **Missing parts:**

- Double-check the package contents against Section 2. If parts are genuinely missing, contact customer support.

7. SPECIFICATIONS







Feature	Specification
Model Number	MT200
Compatible TV Sizes	32-70 inches
Maximum TV Load Capacity	40 kg (88 lbs)
Maximum Shelf Load Capacity	10 kg (22 lbs)
VESA Compatibility	100x100 mm to 400x400 mm
Height Adjustment Range	112.2 cm - 142.2 cm
Media Shelf Dimensions	36 cm x 26 cm
Product Dimensions (L x W x H)	62.3 x 49.7 x 137.2 cm
Product Weight	7.2 kg
Material	Alloy Steel
Color	Black
Movement Type	Swivel (Casters)
Assembly Method	Floor Mount



Image 7.1: The Rfiver Mobile TV Stand in a living room environment.

8. WARRANTY AND SUPPORT

Rfiver products are manufactured with quality and durability in mind. For warranty information, technical support, or to report missing/damaged parts, please contact your retailer or the manufacturer directly. Please have your model number (MT200) and purchase date available when contacting support.

	<p>RFIVER TF3001U TV Stand Installation Manual</p> <p>Detailed installation guide for the RFIVER TF3001U TV Stand, including parts list, step-by-step assembly instructions, VESA compatibility chart, and safety guidelines. Learn how to safely mount your TV.</p>
	<p>Rfiver Universal Swivel Tabletop TV Stand Assembly Manual</p> <p>Assembly manual for the Rfiver Universal Swivel Tabletop TV Stand, Model UT2001. Provides step-by-step instructions and parts list for safe and proper installation.</p>
	<p>Rfiver TF2002 TV Stand Assembly Instructions and User Guide</p> <p>Comprehensive guide for assembling the Rfiver TF2002 TV stand. Includes parts list, step-by-step instructions, safety warnings, and cable management tips for your floor TV mount.</p>
	<p>RFIVER UT5002 TV Stand Assembly Instructions and User Guide</p> <p>This document provides assembly instructions, parts list, and safety notices for the RFIVER UT5002 TV Stand. Learn how to safely assemble and install your TV stand for optimal viewing.</p>
	<p>RFIVER TF3001U TV Stand Installation Manual</p> <p>Detailed installation guide for the RFIVER TF3001U TV Stand, including parts list, step-by-step assembly instructions, VESA compatibility chart, and safety guidelines. Learn how to safely mount your TV.</p>
	<p>Rfiver Universal Swivel Tabletop TV Stand Assembly Manual</p> <p>Assembly manual for the Rfiver Universal Swivel Tabletop TV Stand, Model UT2001. Provides step-by-step instructions and parts list for safe and proper installation.</p>