Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

JOMAA 1503

JOMAA Foldable Bluetooth Keyboard with Numeric - User Manual

Model: 1503

Introduction

This manual provides detailed instructions for the JOMAA Foldable Bluetooth Keyboard with Numeric. This portable, full-size travel keyboard is designed for convenience and efficiency, supporting connectivity with up to three devices simultaneously across various operating systems including iOS, Android, Windows, and Mac OS. Its foldable design makes it ideal for on-the-go use, while its quiet, scissor-footed keys ensure a comfortable typing experience.

Product Overview



Figure 1: JOMAA Foldable Bluetooth Keyboard with Numeric, shown in both unfolded and compact folded states. The keyboard features a full QWERTY layout and a dedicated numeric keypad.

The JOMAA Foldable Bluetooth Keyboard is engineered for portability and multi-device compatibility. It features a robust ABS material construction and a compact folding design, making it easy to carry. The keyboard includes a full QWERTY layout and a numeric keypad for enhanced productivity.

- **Materials:** ABS
- **Keyboard Size (open):** 346.86 x 106.09 x 8.8 mm
- **Keyboard Size (folding):** 187 x 106.09 x 17.8 mm
- **Weight:** 227g
- **Working Voltage:** 3.7V
- **Working Current of Key:** <4mA
- **Standby Current:** <1mA
- **Sleeping Current:** 17uA
- **Sleeping Time:** 10 minutes
- **Working Distance:** 10m
- **Lithium Battery Capacity:** 210mAh
- **Wake Up Method:** Press any key
- **Application:** Windows/IOS/Android/Mac

Setup

1. Charging the Keyboard



Figure 2: The keyboard's Type-C charging port and indicator light. A full charge takes approximately 2 hours and provides up to 60 hours of uninterrupted working time.

Before first use, fully charge the keyboard using the provided USB Type-C cable. Connect the cable to the keyboard's charging port and a compatible USB power source. The charging indicator light will show the charging status. A full charge typically takes 2 hours and provides up to 60 hours of uninterrupted working time.

2. Bluetooth Pairing



Figure 3: The keyboard supports connecting to up to three Bluetooth devices, allowing for easy switching between them using Fn + A, Fn + S, or Fn + D.

The keyboard features three independent Bluetooth channels, allowing connection to up to three different devices. Follow these steps to pair your device:

1. Unfold the keyboard to power it on.
2. Press and hold the **Fn** key and then press one of the channel keys (**A**, **S**, or **D**) to select a Bluetooth channel. For example, **Fn + A** for Device 1.
3. Long press **Fn + Tab** to enter pairing mode. The Bluetooth indicator light will flash.
4. On your device (smartphone, tablet, laptop), enable Bluetooth and search for "Bluetooth Keyboard" or a similar name.
5. Select the keyboard from the list of available devices to complete the pairing process. The indicator light will stop flashing once connected.
6. Repeat for other devices using different Bluetooth channels (Fn + S for Device 2, Fn + D for Device 3).

3. System Compatibility



Figure 4: The keyboard is widely compatible with various operating systems, including Windows, Android, Mac, and iOS, making it versatile for different devices.

The JOMAA Foldable Bluetooth Keyboard is compatible with a wide range of operating systems, including Windows, iOS, Android, and Mac OS. Ensure your device's Bluetooth is enabled and updated for optimal performance.

Operating Instructions

1. Folding and Unfolding

Your browser does not support the video tag.

Video 1: Demonstration of the keyboard's folding and unfolding mechanism, showcasing its compact design for portability. This video also highlights the difference between the numeric and touchpad versions.

To unfold the keyboard, gently open the two side panels until they lie flat, revealing the full keyboard layout. The keyboard will automatically power on when unfolded. To fold, simply close the side panels inwards. The keyboard will automatically power off when folded, conserving battery life.



Figure 5: Dimensions of the JOMAA Foldable Bluetooth Keyboard, illustrating its compact size when folded (5.9in x 3.85in x 0.75in) and full size when unfolded (11.81in x 3.85in).

2. Switching Between Devices

Once multiple devices are paired, you can easily switch between them by pressing the **Fn** key along with the corresponding channel key:

- **Fn + A:** Switch to Device 1
- **Fn + S:** Switch to Device 2
- **Fn + D:** Switch to Device 3

3. Using the Numeric Keypad



Figure 6: The integrated numeric keypad on the right side of the keyboard, designed for convenient and quick data entry and calculations.

The integrated numeric keypad provides convenient and quick input for numbers and calculations. It functions like a standard numeric keypad found on full-size keyboards.

4. Quiet Typing Experience

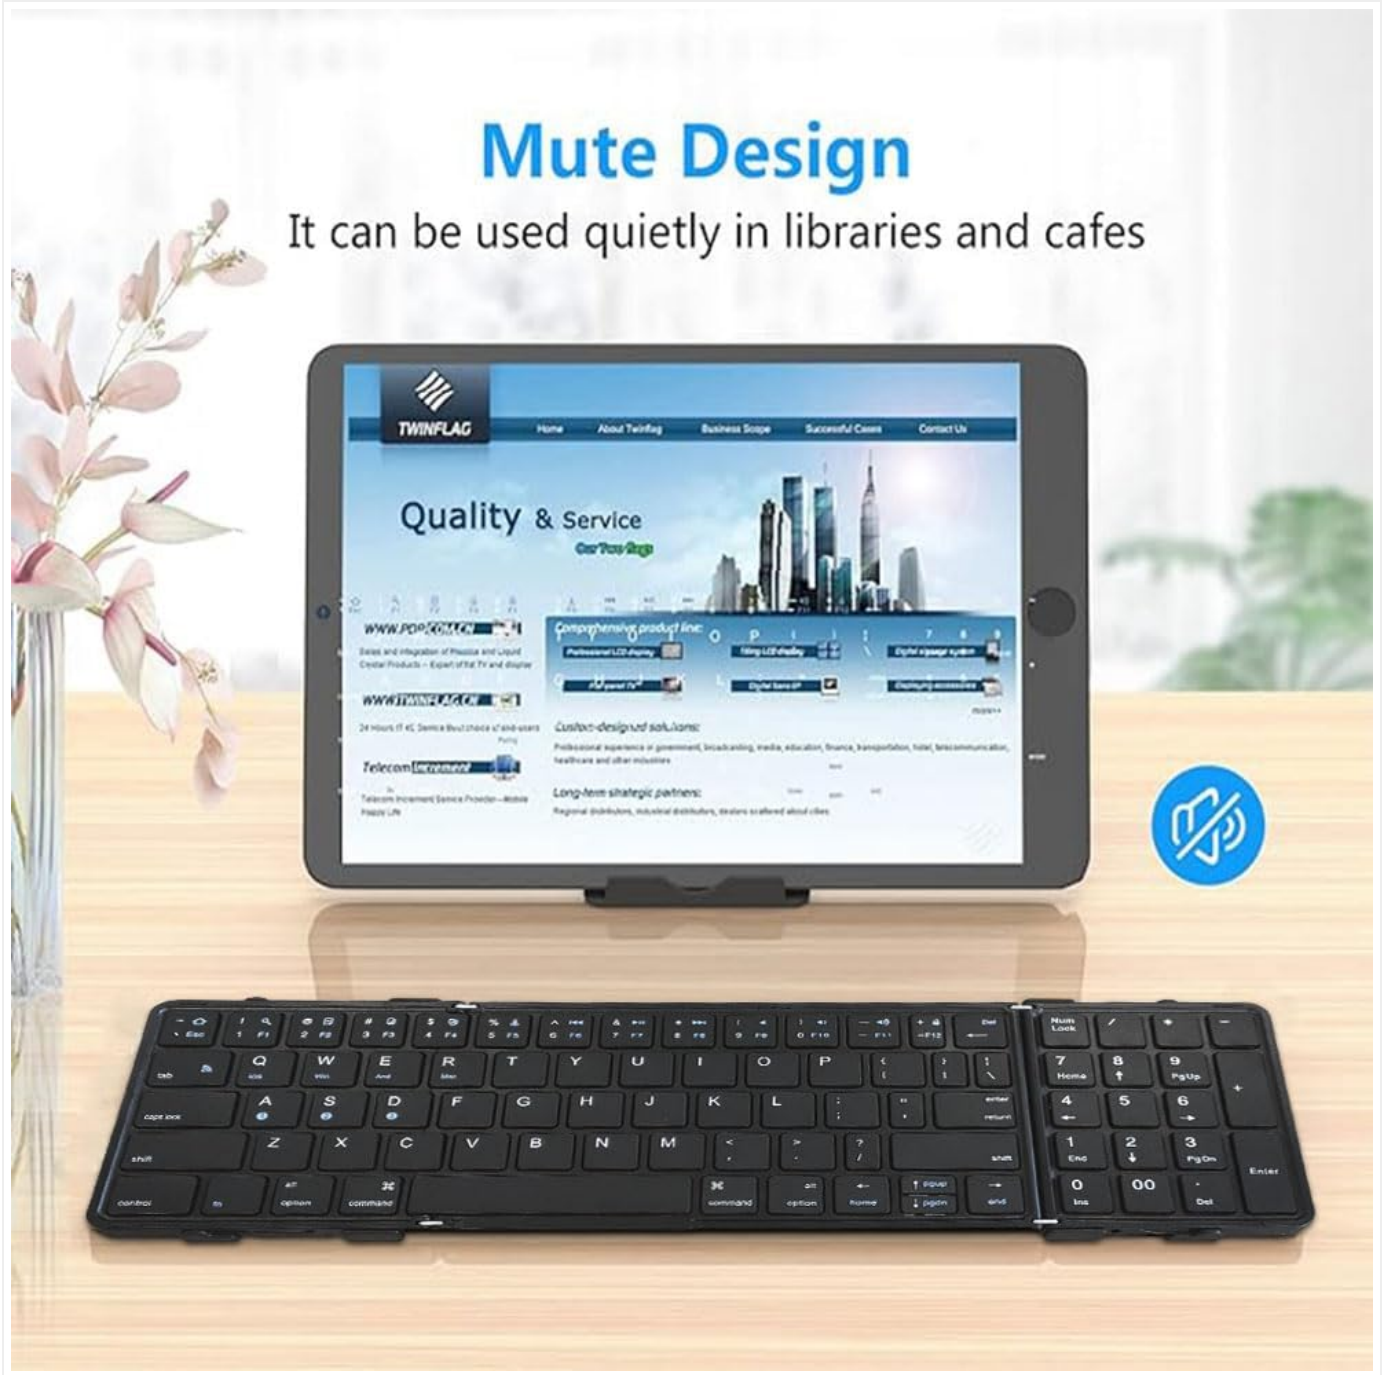


Figure 7: The keyboard's "Mute Design" allows for quiet operation, suitable for environments like libraries or cafes.

The keyboard features soft-feeling, scissor-footed switches designed to minimize typing noise. This "Mute Design" makes it suitable for use in quiet environments such as libraries, cafes, or shared workspaces.

Maintenance

To ensure the longevity and optimal performance of your JOMAA Foldable Bluetooth Keyboard, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to wipe the surface of the keyboard. For stubborn dirt, slightly dampen the cloth with water or a mild, non-abrasive cleaner. Avoid excessive moisture.
- **Storage:** When not in use, fold the keyboard to protect the keys and conserve battery. Store it in a cool, dry place away from direct sunlight and extreme temperatures.
- **Avoid Liquids:** Do not expose the keyboard to liquids. In case of accidental spills, immediately power off the keyboard (by folding it) and allow it to dry completely before attempting to use it again.
- **Handle with Care:** Avoid dropping the keyboard or subjecting it to strong impacts, as this may damage internal

components.

Troubleshooting

If you encounter issues with your JOMAA Foldable Bluetooth Keyboard, please refer to the following common troubleshooting steps:

Problem	Possible Cause	Solution
Keyboard does not power on.	Low battery; Keyboard not unfolded.	Charge the keyboard fully. Ensure the keyboard is fully unfolded to activate.
Cannot connect via Bluetooth.	Keyboard not in pairing mode; Device Bluetooth off; Interference; Already connected to 3 devices.	Ensure **Fn + Tab** is pressed to enter pairing mode. Check if Bluetooth is enabled on your device. Move closer to the device. Ensure you are selecting an unused Bluetooth channel.
Keys are unresponsive or delayed.	Low battery; Out of range; Interference.	Recharge the keyboard. Move the keyboard closer to your device (within 10m). Avoid using near strong electromagnetic sources.
Numeric keypad not working.	Num Lock is off.	Press the **Num Lock** key on the numeric keypad to activate it.

If the problem persists after trying these steps, please contact JOMAA customer support for further assistance.

Specifications

- **Product Dimensions (open):** 13.62 x 4.18 x 0.35 inches (346.86 x 106.09 x 8.8 mm)
- **Product Dimensions (folded):** 7.36 x 4.18 x 0.70 inches (187 x 106.09 x 17.8 mm)
- **Item Weight:** 11.6 ounces (227g)
- **Manufacturer:** JOMAA
- **Model Name:** Bluetooth folding keyboard
- **Item Model Number:** 1503
- **Batteries:** 1 Lithium Ion battery required (included)
- **Compatible Devices:** Laptop, Smartphone, Tablet
- **Connectivity Technology:** Bluetooth
- **Keyboard Description:** Flexible
- **Special Feature:** Foldable
- **Number of Keys:** 64
- **Style:** With numeric
- **Included Components:** USB Cable

Warranty and Support

For warranty information or technical support, please contact the seller, Vadendream, through your Amazon order details. Please refer to your purchase documentation for specific warranty terms and conditions.

© 2025 JOMAA. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0CZNXT83C

More documents and user manuals: **https://manuals.plus/**