

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [JPHTEK](#) /
- › [JPHTEK Mini Foldable Bluetooth Keyboard User Manual \(Model B023\)](#)

JPHTEK B023

JPHTEK Mini Foldable Bluetooth Keyboard

USER MANUAL (MODEL B023)



Image: The JPHTEK Mini Foldable Bluetooth Keyboard in its open, ready-to-use state, alongside a smartphone resting in the included foldable stand.

Introduction

Thank you for choosing the JPHTEK Mini Foldable Bluetooth Keyboard, Model B023. This ultra-slim,

portable wireless keyboard is designed for convenience and efficiency, allowing you to type comfortably on the go. It supports multiple operating systems and can connect to up to three devices simultaneously. This manual provides detailed instructions for setup, operation, maintenance, and troubleshooting to ensure optimal performance.

Package Contents

- JPHTEK Mini Foldable Bluetooth Keyboard (Model B023)
- Foldable Phone Holder
- USB-C Charging Cable
- User Manual

Product Overview

The JPHTEK Mini Foldable Bluetooth Keyboard features a compact, foldable design for easy portability. It includes a full QWERTY layout with function keys and a built-in rechargeable battery. The keyboard automatically wakes up when opened and sleeps when closed to conserve power.

FOLDABLE POCKET SIZE KEYBOARD

Similar size as iPhone 14



Image: The keyboard's dimensions (11 inches long, 3.7 inches wide, 0.5 inches thick when folded) are shown next to an iPhone 14 for scale, highlighting its pocket-size portability.



Image: A hand demonstrates placing the compact, folded keyboard into a backpack's side pocket, illustrating its travel-friendly design.

Setup

1. Charging the Keyboard

Before first use, fully charge the keyboard. Connect the included USB-C charging cable to the keyboard's charging port and the other end to a USB power source (e.g., computer, wall adapter). The charging indicator light will illuminate and turn off when fully charged.

TYPE-C CHARGING

2-3 hours char lasts 10 days!
Enough for your short business trips

 **140mAh**



48
hours
uninterrupted
work

180
days
Standby
time

Image: The keyboard is shown connected via a USB-C cable for charging, with text indicating 2-3 hours for a full charge, providing 48 hours of continuous use or 180 days of standby.

2. Power On/Off

The keyboard features an automatic power on/off function. Simply unfold the keyboard to power it on. Fold the keyboard to power it off and enter sleep mode.

FREE FOLDABLE STAND


6 adjustable screen views are available



Open to wake up



Close to sleep

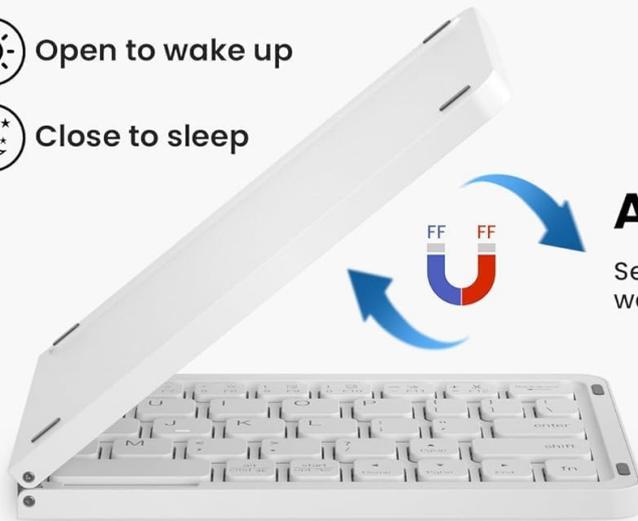

AUTO WAKE / SLEEP

Sensitive magnetic induction automatic wake up and sleep to save energy

Image: A visual representation of the keyboard's magnetic induction auto wake/sleep feature, showing it wakes when opened and sleeps when closed to save energy.

3. Bluetooth Pairing

1. Unfold the keyboard to power it on. The Bluetooth indicator light will flash.
2. Press the **"Connect"** button on the keyboard. The Bluetooth indicator will start flashing rapidly, indicating it's in pairing mode.
3. On your device (smartphone, tablet, computer), go to Bluetooth settings and enable Bluetooth.
4. Search for available devices. Select **"Bluetooth Keyboard"** or a similar name from the list.
5. Follow any on-screen prompts to complete the pairing process. The indicator light on the keyboard will stop flashing once successfully paired.

4. Connecting to Multiple Devices (Up to 3)

This keyboard supports connecting to up to three devices. Use the dedicated function keys to switch between paired devices:

- Press **Fn + Q** for Device 1
- Press **Fn + W** for Device 2
- Press **Fn + E** for Device 3

To pair a new device to a specific channel (e.g., Device 2), first switch to that channel (Fn+W), then press the "Connect" button to enter pairing mode for that channel.

Multi-devices & multi-os



Image: The keyboard is shown connected to an iPhone, iPad, and Mac, illustrating its multi-device and multi-OS compatibility with indicators for three Bluetooth channels.

5. Switching Operating Systems

For optimal key functionality, switch the keyboard to match your device's operating system:

- Press **Fn + A** for Android
- Press **Fn + S** for Windows
- Press **Fn + D** for iOS/Mac

Operating Instructions

Function Keys

The keyboard includes various function keys (F1-F12) that perform special actions when pressed in combination with the **Fn** key. These functions may vary slightly depending on your operating system.

Key Combination	Function
Fn + F1	Home Screen
Fn + F2	Search
Fn + F3	Select All
Fn + F4	Copy
Fn + F5	Paste
Fn + F6	Cut
Fn + F7	Previous Track
Fn + F8	Play/Pause
Fn + F9	Next Track
Fn + F10	Mute
Fn + F11	Volume Down
Fn + F12	Volume Up

Maintenance

Cleaning

To clean the keyboard, gently wipe the surface with a soft, damp cloth. Avoid using harsh chemicals or abrasive materials. Ensure the keyboard is powered off before cleaning.

Battery Care

The keyboard uses a built-in lithium battery. For optimal battery life:

- Avoid exposing the keyboard to extreme temperatures.
- Charge the keyboard regularly, even if not in frequent use, to prevent deep discharge.
- Do not attempt to replace the battery yourself. Contact customer support if battery issues arise.

Troubleshooting

- **Keyboard not connecting:**
 - Ensure the keyboard is charged and powered on (unfolded).
 - Make sure Bluetooth is enabled on your device.
 - Press the "Connect" button on the keyboard to enter pairing mode.
 - Forget the keyboard from your device's Bluetooth settings and try pairing again.
 - Ensure the keyboard is within the 10-meter operating range of your device.
- **Keys not responding:**
 - Check battery level and charge if necessary.
 - Ensure the keyboard is properly connected via Bluetooth.
 - Verify that the correct operating system mode (Fn+A/S/D) is selected.

- **Unexpected behavior:**

- Try restarting both the keyboard (fold and unfold) and your connected device.
- Ensure there are no other strong wireless signals interfering with the Bluetooth connection.

If you continue to experience issues, please refer to the "Warranty and Support" section for contact information.

Specifications

Feature	Detail
Model Number	B023
Connectivity Technology	Bluetooth
Compatible Devices	Laptop, PC, Smart TV, Tablet, Smartphone (iOS, Android, Windows)
Material	Aluminum
Product Dimensions (Unfolded)	11"L x 3.72"W x 0.34"H
Item Weight	8.8 ounces
Battery Type	Lithium Polymer (included)
Battery Life (Continuous Use)	Up to 40 hours
Standby Time	Up to 180 days
Charging Time	2-3 hours
Operating Range	Up to 10 meters (33 feet)

Warranty and Support

JPHTEK provides a 100% Satisfaction Service, including 24-hour Email Response and Lifetime Technical Support. If you have any questions, concerns, or require assistance with your JPHTEK Mini Foldable Bluetooth Keyboard, please do not hesitate to contact our customer support team.

For support, please visit the [JPHTEK Store on Amazon](#) or refer to the contact information provided with your purchase.