

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

- › [Nobleza](#) /
- › [Nobleza Automatic Wi-Fi Pet Feeder \(4.2L\) Instruction Manual](#)

Nobleza 4.2L Automatic Wi-Fi Pet Feeder

Nobleza Automatic Wi-Fi Pet Feeder (4.2L) Instruction Manual

Model: 4.2L Automatic Wi-Fi Pet Feeder

1. PRODUCT OVERVIEW

The Nobleza 4.2L Automatic Wi-Fi Pet Feeder is designed to provide scheduled and controlled feeding for your cats and dogs. This smart feeder offers convenience and peace of mind, ensuring your pets are fed consistently even when you are away. Key features include Wi-Fi app control, flexible meal scheduling, a 10-second voice recording function, a triple-sealed food storage compartment for freshness, and a dual power supply system for reliable operation.



Image 1.1: The Nobleza Automatic Wi-Fi Pet Feeder, demonstrating its design and app control interface.

Package Contents:

- 1x Nobleza 4.2L Pet Feeder Unit
- 1x Stainless Steel Food Bowl
- 1x Desiccant Bag (pre-installed or separate)
- 1x 5V Power Adapter
- 1x User Manual (this document)

2. SETUP AND INSTALLATION

2.1 Unpacking and Assembly

1. Carefully remove all components from the packaging.
2. Insert the stainless steel bowl into the designated slot at the base of the feeder.
3. Ensure the desiccant bag is placed in its compartment within the food storage lid to maintain food freshness.

Easy Installation Disassembly & Cleaning



Image 2.1: Disassembled components for easy setup and cleaning.

2.2 Power Supply

The feeder supports dual power supply options to ensure continuous operation:

- **Primary Power:** Connect the provided 5V power adapter to the feeder and a wall outlet.
- **Backup Power:** For uninterrupted operation during power outages, install 3x D-size batteries (not included) into the battery compartment at the bottom of the feeder.



Image 2.2: Dual power supply system for reliable operation.

2.3 App Download and Wi-Fi Connection

1. Download the **Aigosmart** app from the App Store (iOS) or Google Play Store (Android).
2. Open the app and follow the on-screen instructions to create an account or log in.
3. Add a new device: Select the pet feeder from the device list.
4. Connect the feeder to your **2.4GHz Wi-Fi network**. The feeder only supports 2.4GHz Wi-Fi. Ensure your smartphone is also connected to a 2.4GHz network during the setup process.
5. Once connected, the feeder's Wi-Fi indicator light will confirm a successful connection.

APP CONTROL

Feed Your Pet Anytime Anywhere



Scan the QR code on the box or manual to download the APP

2.4GHz 5GHz

Connect pet feeder to Wi-Fi and APP(Only 2.4G Wi-Fi Supported)



Start using your smart pet feeder



Image 2.3: App control interface and Wi-Fi connection requirements.

2.4 Filling the Food Container

Open the top lid and pour dry pet food into the container. The feeder has a 4.2L capacity. Ensure the food kibble size is between 2-15mm to prevent clogging.

3. OPERATING INSTRUCTIONS

3.1 Scheduling Meals via App

Use the Aigosmart app to customize your pet's feeding schedule:

- **Meal Times:** Program up to 10 meals per day.
- **Portion Sizes:** Each meal can be set from 1 to 24 portions. One portion is approximately 10g (± 2 g).
- **Monitoring:** The app allows you to monitor feeding times and dispensed quantities.

FEED SCIENTIFICALLY

Keep Your Pets Healthy




10 Meals

10 Meals Can Be Set Per Day, And The Upper Limit Of Each Meal Is 24 Servings



2-15mm

Suitable For 2-15mm Cat Or Dog Food

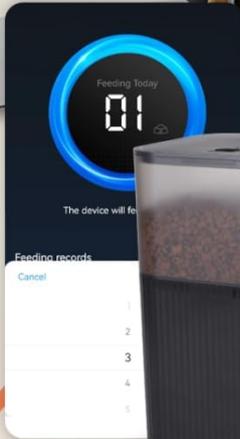

10g

Each Time
($\approx 10 \pm 2g$)



Image 3.1: Flexible meal planning and portion control.

The feeder is also compatible with Amazon Alexa and Google Assistant for voice control (requires integration through the Aigomart app).

REMOTE CUSTOMIZED FEEDING TIMES & AMOUNT

Help pets eat regularly and maintain gut health even on trips



Image 3.2: Remote customized feeding times and amount, compatible with smart home assistants.

3.2 Voice Recording Function

Record a personalized 10-second voice message through the app. This message will play automatically before each scheduled meal, calling your pet to eat and providing a familiar sound.

10S VOICE RECORD

 Call to Eat



Hey Honey, Time to Eat!



Image 3.3: 10-second voice recording feature to call pets to eat.

3.3 Food Shortage Alerts and Anti-Clogging Design

The feeder is equipped with sensors to detect low food levels and will send alerts to your app, reminding you to refill. Its internal design helps prevent food from clogging during dispensing.

ANTI-CLOGGING DESIGN & FOOD SHORTAGE ALERTS

No Need To Worry About
Forgetting To Refill Your Pet's Food



Image 3.4: Anti-clogging design and food shortage alerts.

4. MAINTENANCE

4.1 Cleaning the Feeder

Regular cleaning ensures hygiene and proper functioning:

1. Unplug the feeder and remove any batteries.
2. Remove the stainless steel food bowl and wash it with soap and water. Rinse thoroughly.
3. The food container and lid can be detached for cleaning. Wipe them with a damp cloth and mild detergent. Do not immerse the main unit (with electronics) in water.
4. Ensure all parts are completely dry before reassembling and refilling with food.

4.2 Desiccant Bag Replacement

The desiccant bag helps keep the food fresh and dry. Replace it every 1-3 months, depending on humidity levels, to maintain optimal food quality.

5. TROUBLESHOOTING

- **Feeder not powering on:**
 - Check if the power adapter is securely connected to both the feeder and the wall outlet.
 - If using batteries, ensure they are correctly inserted and not depleted. Replace if necessary.
- **Unable to connect to Wi-Fi:**
 - Confirm your Wi-Fi network is 2.4GHz. The feeder does not support 5GHz networks.
 - Ensure your smartphone is connected to the same 2.4GHz network during setup.
 - Move the feeder closer to your Wi-Fi router to improve signal strength.
 - Restart your router and the feeder, then attempt connection again.
- **Food not dispensing:**
 - Check if the food container is empty.
 - Verify that the food kibble size is within the recommended 2-15mm range. Larger kibble may cause blockages.
 - Inspect the dispensing mechanism for any obstructions.
 - Ensure the feeder is properly assembled and the food container lid is securely closed.
- **Voice recording not playing:**
 - Ensure a voice message has been successfully recorded and saved in the app.
 - Check the volume settings within the app.
- **App not responding:**
 - Close and reopen the Aigosmart app.
 - Ensure your smartphone has a stable internet connection.
 - Check for app updates in your device's app store.

6. SPECIFICATIONS



Image 6.1: Product dimensions and capacity.

Feature	Detail
Brand	Nobleza
Model	4.2L Automatic Wi-Fi Pet Feeder
Capacity	4.2 Liters
Material	Stainless Steel (bowl), Plastic (body)
Color	Black
Dimensions (Product)	Approx. 19.1 cm (W) x 34.1 cm (H) x 31 cm (D)
Power Supply	5V Adapter (included), 3x D-size Batteries (not included)

Feature	Detail
Connectivity	Wi-Fi (2.4GHz only)
Max Meals/Day	10
Portions/Meal	1-24 portions (approx. 10g/portion)
Kibble Size	2-15mm
Special Features	Wi-Fi App Control, Flexible Meal Planning, 10s Voice Recording, Triple Seal for Freshness, Dual Power, Food Shortage Alerts, Anti-Clogging Design
Target Species	Cats, Dogs

7. WARRANTY AND SUPPORT

For warranty information and customer support, please refer to the documentation included with your purchase or contact Nobleza customer service directly. Details are typically available on the manufacturer's official website or through your retailer.

© 2024 Nobleza. All rights reserved.

Related Documents - 4.2L Automatic Wi-Fi Pet Feeder

 <p>SMART PET FEEDER</p>	<p>Nobleza Smart Pet Feeder User Manual</p> <p>Comprehensive user manual for the Nobleza Smart Pet Feeder (Model S4010121Q), covering setup, operation, troubleshooting, and maintenance. Features include app control, dual power modes, and automatic feeding.</p>
 <p>INSTRUCTION MANUAL AUTOMATIC CAT LITTER BOX</p>	<p>Nobleza Automatic Cat Litter Box Instruction Manual</p> <p>Comprehensive instruction manual for the Nobleza Automatic Cat Litter Box (Model T-MSP1). Learn how to set up, operate, clean, and troubleshoot this smart, self-cleaning pet device for optimal hygiene and convenience.</p>
 <p>INSTRUCTION MANUAL SMART PET WATER FOUNTAIN</p>	<p>Nobleza Smart Pet Water Fountain: Instruction Manual</p> <p>User guide for the Nobleza Smart Pet Water Fountain (Models S40101N33, S40101N34), detailing setup, operation via the AigoSmart app, troubleshooting, and maintenance for optimal pet hydration.</p>



[Nobleza Automatic Cat Litter Box T-MSP1 Product Information](#)

Official product details for the Nobleza Automatic Cat Litter Box, Model T-MSP1, including specifications and compliance marks.



[Nobleza Smart Cat Litter Box SL02 \(Model AL70\) - Automatic & Self-Cleaning](#)

Discover the Nobleza Smart Cat Litter Box SL02, model AL70. This automatic, self-cleaning cat litter box offers convenience and hygiene. Features include 12V/2A input, 24W rated power, and is manufactured by AIGOITALIA SRL.



[NOBLEZA Smart Aquarium Instruction Manual](#)

This manual provides detailed instructions for setting up, operating, and maintaining the NOBLEZA Smart Aquarium. It covers safety precautions, component descriptions, operation panel functions, troubleshooting, cleaning, and electrical recycling information.