

[Manuals.plus](#) /

› [CANMEIJIA](#) /

› CANMEIJIA 4-Light Matte Black Bathroom Vanity Light Fixture User Manual

CANMEIJIA CM-JQD-4L-B

CANMEIJIA 4-Light Matte Black Bathroom Vanity Light Fixture

Model: CM-JQD-4L-B

INTRODUCTION

Thank you for choosing the CANMEIJIA 4-Light Matte Black Bathroom Vanity Light Fixture. This manual provides essential information for safe installation, operation, and maintenance of your new lighting fixture. Please read these instructions thoroughly before beginning installation and retain them for future reference.

SAFETY INFORMATION

- **WARNING:** Risk of electric shock. Disconnect power at the fuse box or circuit breaker before installation or servicing.
- All electrical connections must be in accordance with local codes, ordinances, or the National Electric Code (NEC). Contact a qualified electrician if you are unfamiliar with proper electrical wiring connections.
- Use only E26 standard medium base bulbs, maximum 60W for each light. Bulbs are not included.
- Do not install this fixture in wet locations. It is designed for indoor use only.
- Ensure the mounting surface can support the weight of the fixture.
- Handle glass shades with care to prevent breakage.

PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Light Fixture Body (Matte Black)
- Milky White Glass Shades (4 pieces)
- Mounting Hardware (screws, wire nuts, mounting plate)
- Instruction Manual

SPECIFICATIONS

Feature	Specification
Brand	CANMEIJIA

Model Name	CM-JQD-4L-B
Color	4 Light--Black (Matte Black Finish)
Material	Aluminum (Fixture), Glass (Shades)
Style	Modern
Product Dimensions	21.65"L x 6.5"W x 8.86"H
Power Source	Corded Electric
Bulb Base	E26 Standard Medium Base
Max Wattage per Bulb	60W
Number of Light Sources	4
Installation Type	Wall Mount
Indoor/Outdoor Usage	Indoor



Figure 1: Product Dimensions Overview

INSTALLATION INSTRUCTIONS

Follow these steps to install your CANMEIJIA vanity light fixture:

- 1. Prepare for Installation:** Turn off the power at the circuit breaker or fuse box. Ensure the power is completely disconnected before proceeding.
- 2. Attach Mounting Plate:** Secure the universal mounting plate to the junction box on your wall using the provided screws. Ensure it is firmly attached.
- 3. Make Electrical Connections:** Connect the fixture's wires to your house wiring. Connect the black wire (live) from the fixture to the black wire from the junction box. Connect the white wire (neutral) from the fixture to the white wire from the junction box. Connect the ground wire (copper) from the fixture to the ground wire from the junction box. Secure all connections with wire nuts.
- 4. Mount the Fixture:** Carefully align the fixture body with the mounting plate and secure it using the decorative screw nuts.
- 5. Install Glass Shades:** Gently attach each milky white glass shade to its respective socket.
- 6. Insert Bulbs:** Screw E26 standard medium base bulbs (not included, max 60W each) into the sockets.

7. **Restore Power:** Turn the power back on at the circuit breaker or fuse box. Test the light fixture.



Figure 2: Step-by-Step Installation Process

Video 1: Installation Overview for CANMEIJIA 4-Light Bathroom Vanity Light Fixture. This video demonstrates the general installation process, including mounting the bracket, wiring, and attaching the fixture and shades.

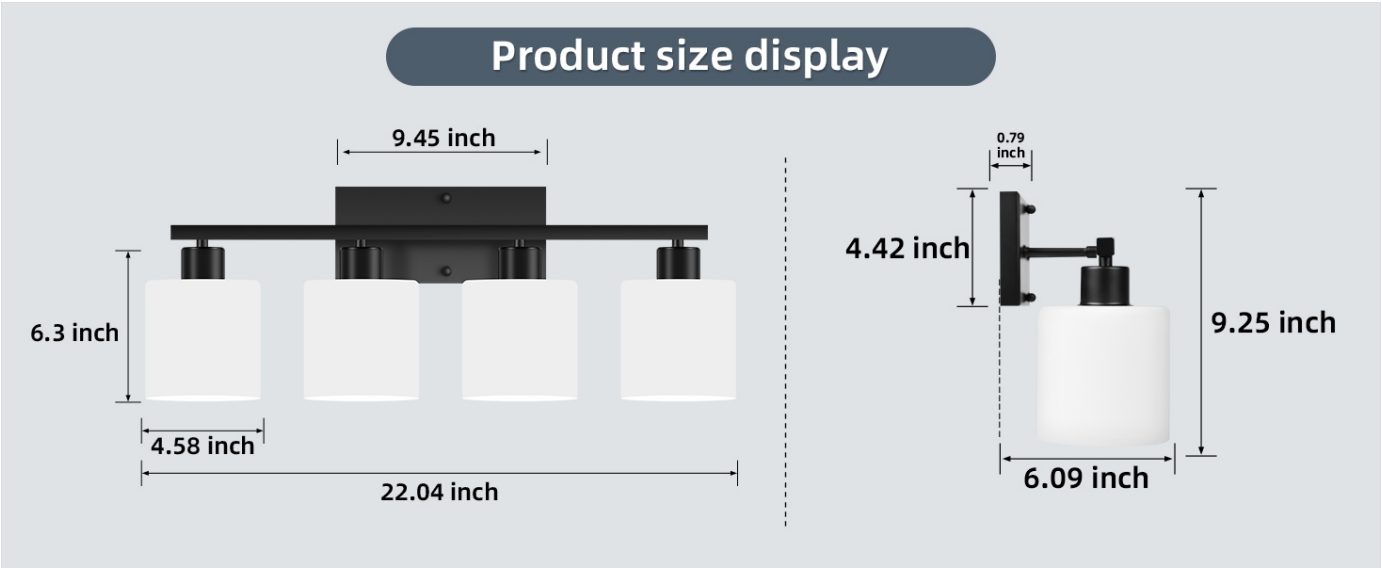


Figure 3: Flexible Installation Direction (Up or Down)

OPERATION

Once installed, operate the light fixture using your standard wall switch. The fixture is designed for use with E26 base bulbs, allowing for various light source types including incandescent and LED, up to 60W per bulb. This flexibility enables you to choose the desired brightness and color temperature for your space.



Figure 4: Compatible E26 Base Bulbs (Bulbs Not Included)

MAINTENANCE

Regular maintenance ensures the longevity and optimal performance of your light fixture.

- **Cleaning:** To clean the fixture, ensure power is off. Wipe the matte black finish with a soft, dry cloth. For glass shades, remove them carefully and wash with mild soap and water, then dry thoroughly before reattaching. Avoid abrasive cleaners or solvents that may damage the finish or glass.
- **Bulb Replacement:** Always turn off power before replacing bulbs. Allow old bulbs to cool before removal. Replace with E26 standard medium base bulbs, not exceeding 60W per bulb.
- **Inspection:** Periodically check all connections and mounting hardware to ensure they remain secure.

TROUBLESHOOTING

If you encounter issues with your light fixture, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on	1. Power is off 2. Loose wiring connection 3. Faulty bulb	1. Check circuit breaker/fuse 2. Verify all wire connections are secure (power off first) 3. Replace bulb
Light flickers	1. Loose bulb 2. Incompatible dimmer switch 3. Loose wiring	1. Tighten bulb 2. Ensure dimmer is compatible with LED/incandescent bulbs 3. Check wiring connections (power off first)
Shades appear discolored or damaged	1. Improper cleaning agents 2. Physical damage	1. Use only mild soap and water for cleaning 2. Contact customer support for replacement parts

WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the product packaging or contact CANMEIJIA customer service directly. Keep your purchase receipt as proof of purchase.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question