

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [ALPOWL](#) /

› [ALPOWL Podcast Equipment Bundle for 2 \(Model V8S2\) - Instruction Manual](#)

## ALPOWL V8S2

# ALPOWL Podcast Equipment Bundle for 2 (Model V8S2)

Instruction Manual

## INTRODUCTION

This manual provides detailed instructions for setting up and operating your ALPOWL Podcast Equipment Bundle for 2 (Model V8S2). This comprehensive kit is designed for high-quality audio recording and live streaming, suitable for podcasts, gaming, home studio recording, and various online platforms. Please read this manual thoroughly before use to ensure optimal performance and longevity of your equipment.

## WHAT'S IN THE BOX

Your ALPOWL Podcast Equipment Bundle includes the following components:

- 2 x BM-800 Condenser Microphones
- 2 x Double-Layer Pop Filters
- 2 x Adjustable Suspension Scissor Arm Stands
- 2 x Shock Mounts
- 2 x Anti-wind Foam Caps
- 1 x Live Sound Card (DJ Mixer)
- 2 x Earphones (in-ear headphones)
- 1 x Power Cable
- Multiple 3.5mm audio cables for connectivity
- USB Type-C cable for computer connection and charging



Figure 1: All components included in the ALPOWL Podcast Equipment Bundle.

## SETUP INSTRUCTIONS

Follow these steps to set up your podcast equipment bundle:

- 1. Attach Microphone Stands:** Securely attach the adjustable suspension scissor arm stands to your desk or table using the provided clamps. Ensure they are stable.
- 2. Mount Microphones:** Place each BM-800 condenser microphone into its respective shock mount. Then, attach the shock mount to the end of each scissor arm stand.
- 3. Install Pop Filters and Foam Caps:** Attach the double-layer pop filters to the microphone stands, positioning them in front of each microphone. Place the anti-wind foam caps over the microphone heads.
- 4. Connect Microphones to Mixer:** Use the provided 3.5mm audio cables to connect each microphone to the 'Condenser Mic 1' and 'Condenser Mic 2' input jacks on the Live Sound Card (DJ Mixer).
- 5. Connect Earphones:** Plug the earphones into the 'Headset' or 'Monitor' output jacks on the mixer.
- 6. Power On and Connect to Device:**
  - For Computer (PC/Mac):** Connect the mixer to your computer using the USB Type-C cable. The

device is plug-and-play and should be automatically recognized.

- **For Smartphone/Tablet:** Use the appropriate 3.5mm audio cables to connect your smartphone or tablet to the 'LIVE1' or 'LIVE2' input/output jacks on the mixer.
- **Charging:** Ensure the mixer's battery is fully charged before extended use. Connect the power cable to the 5V 1A PCLIVE port for charging.

## SUPPORT 2 DEVICES & 2 PEOPLE LIVE STREAMING

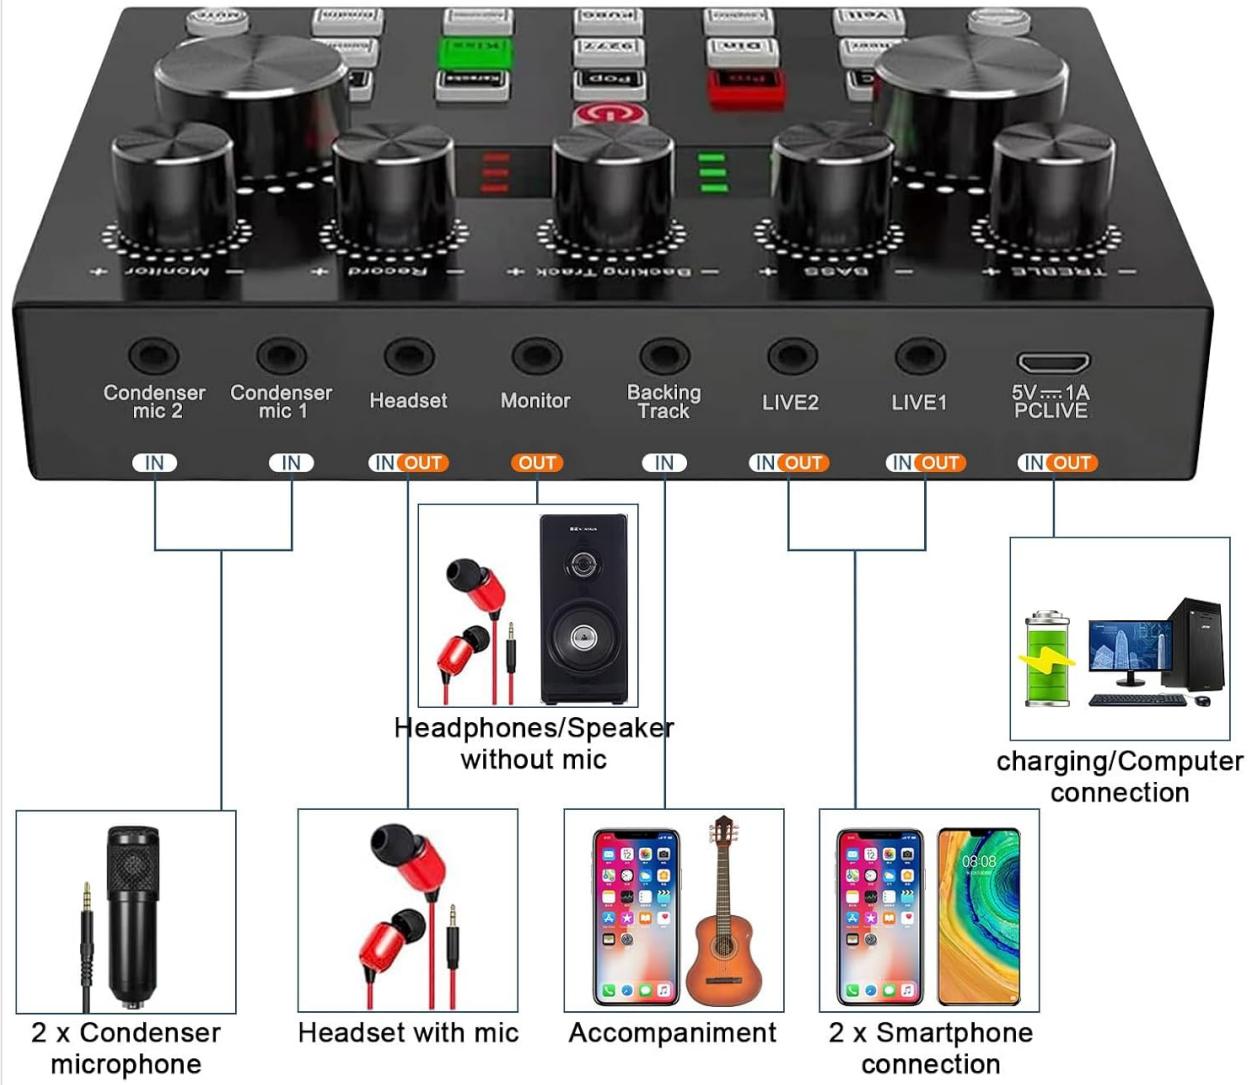


Figure 2: Connection diagram for the Live Sound Card.

# Support Double Live Broadcast



Figure 3: Example setup for a double live broadcast.

## OPERATING INSTRUCTIONS

The Live Sound Card offers various controls and features for enhancing your audio:

- **Volume Controls:** Adjust individual volume knobs for microphone input, accompaniment, record level, and monitor output.
- **Tone Adjustment:** Use the 'TREBLE' and 'BASS' knobs to fine-tune the tonal quality of your voice.
- **Echo Effect:** The 'ECHO' knob allows you to add or reduce reverberation to your voice.
- **Sound Effects:** The mixer features 10 pre-programmed sound effect buttons (e.g., Cheer, Din, Kiss, Gunshot, Laughter, Yell, Dindin). Press a button to activate the corresponding sound.
- **Voice Change Effects:** Utilize the voice change buttons (e.g., EMC, Pro, Pop, Karaoke) to alter your vocal tone for immersive role-playing or creative content.
- **One-Click Original Sound Elimination:** This feature allows you to remove the original vocals from music, enabling karaoke anytime.
- **Voice Over Function:** Automatically adjusts your voice and accompanying music levels. When you speak, the music volume lowers; when you stop, the music volume returns to normal.

- **Mute Function:** A dedicated mute button allows for quick silencing of your microphone input.

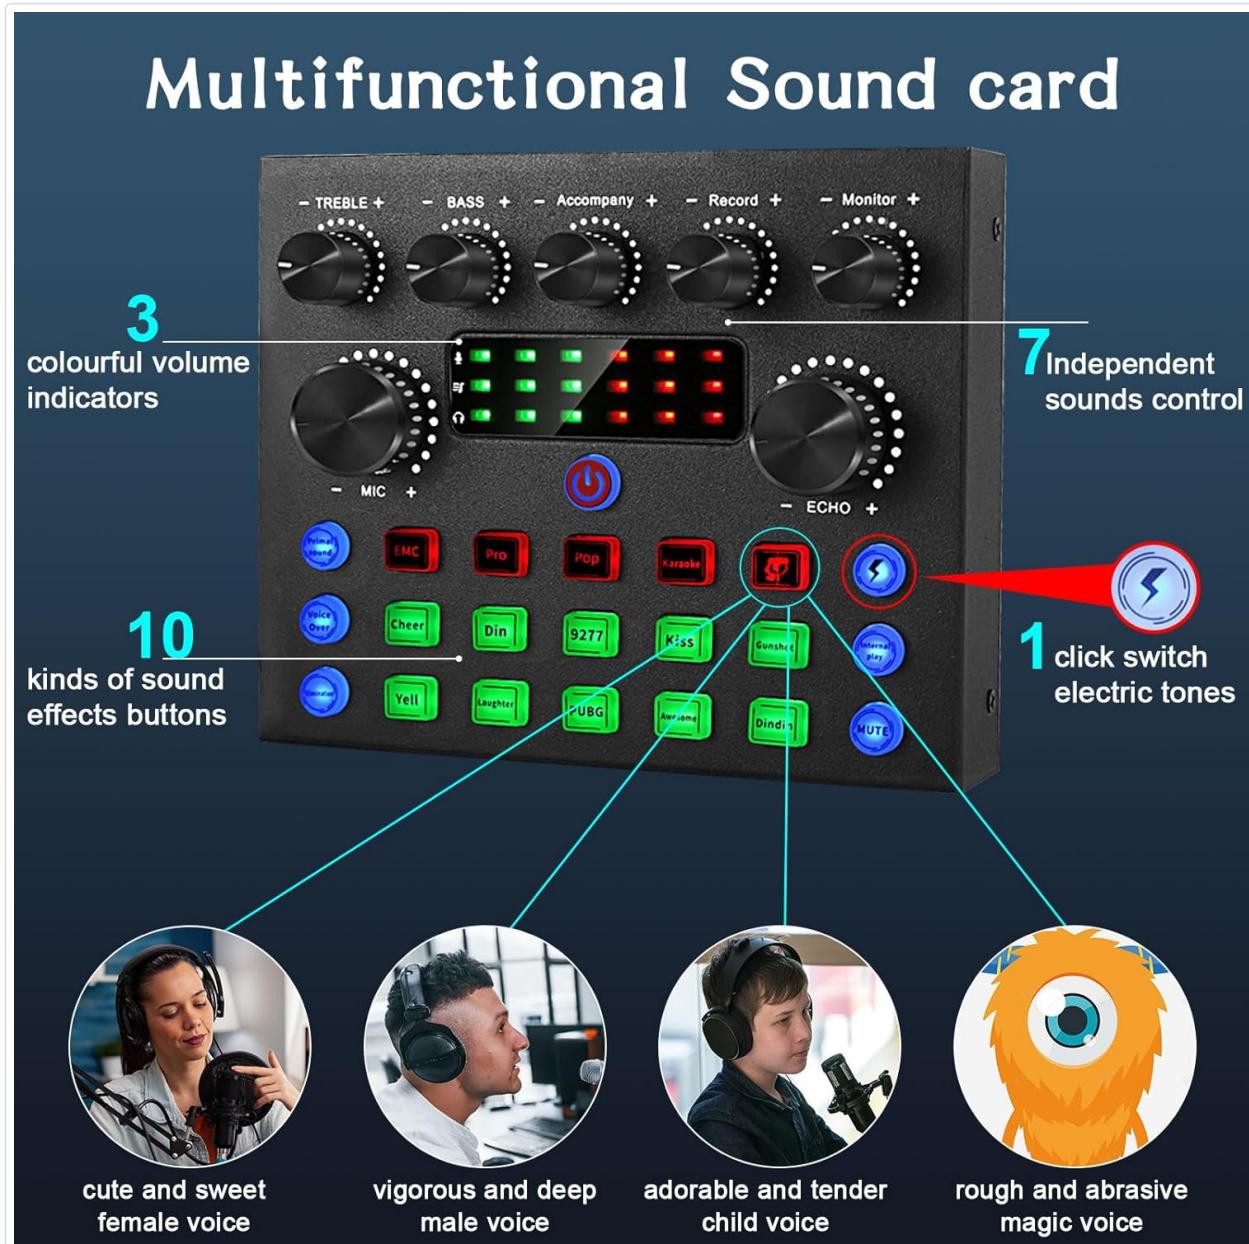


Figure 4: Live Sound Card controls and features.

Your browser does not support the video tag.

Video 1: A demonstration of the ALPOWL Podcast Equipment Bundle, showcasing its features and setup for live streaming and recording.

## CONNECTIVITY & COMPATIBILITY

The ALPOWL Podcast Equipment Bundle offers wide compatibility:

- **Operating Systems:** Compatible with Windows, iOS, Android, Mac OS, and Chrome OS.
- **Devices:** Supports smartphones, PCs, PlayStation consoles (PS4, Xbox), and other devices.
- **Software/Platforms:** Works with popular applications like OBS, Audacity, iMovie, and live streaming platforms such as TikTok, Live.me, Twitch, Periscope, YouTube Live, and Facebook Live.
- **Plug and Play:** USB condenser microphone kit is easy to set up as plug and play, requiring no phantom power for basic operation.

# Wide Compatibility

Support: Desktop, Laptop, iPhone, Flat & Andriod Phone



Support various recording software & livestreaming platforms



Figure 5: Wide compatibility with various devices and platforms.

## SPECIFICATIONS

Feature	Specification
Brand	ALPOWL
Model Name	BM-800 (Microphone), V8S2 (Mixer)
Connectivity Technology	USB
Connector Type	USB Type-C
Microphone Form Factor	Handheld (Condenser)
Polar Pattern	Unidirectional (Cardioid)
Number of Channels	2
Frequency Response	20 Hz
Signal-to-Noise Ratio	78 dB

Feature	Specification
Material	Metal
Power Source	Corded Electric
Item Weight	5.7 pounds (2.59 Kilograms)
Package Dimensions	16.61 x 8.39 x 5.24 inches

## MAINTENANCE

To ensure the longevity and optimal performance of your ALPOWL Podcast Equipment Bundle, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to wipe down the microphones, mixer, and stands. Avoid using harsh chemicals or abrasive materials.
- **Storage:** When not in use, store the equipment in a dry, dust-free environment. Disassemble the stands and microphones if storing for extended periods to prevent damage.
- **Cable Care:** Avoid bending or kinking cables sharply. Store cables neatly to prevent tangling and damage.
- **Battery Care:** For the Live Sound Card, fully charge the battery before first use and if the product has not been used for a long time. This helps maintain battery health.

## TROUBLESHOOTING

If you encounter any issues with your ALPOWL Podcast Equipment Bundle, consider the following:

- **No Power/Device Not Turning On:** Ensure the Live Sound Card's battery is fully charged. Connect the power cable and allow it to charge for a few hours.
- **Microphone Not Detected/No Sound:**
  - Check all cable connections between the microphones and the mixer, and between the mixer and your computer/smartphone.
  - Verify that the microphone volume knob on the mixer is turned up.
  - Ensure the correct audio input device is selected in your computer's sound settings or your recording software.
- **Driver Issues (for PC/Mac):** The device is designed for plug-and-play operation. If drivers do not automatically download or function correctly, please contact ALPOWL professional after-sales team for assistance.
- **Poor Sound Quality (Echo, Distortion):**
  - Adjust the 'ECHO' knob on the mixer to reduce excessive reverberation.
  - Ensure pop filters are correctly positioned to minimize plosive sounds.
  - Check microphone placement and distance from the speaker.
  - Adjust 'TREBLE' and 'BASS' settings for clearer audio.
- **Headphones Not Working:** Ensure earphones are securely plugged into the correct output jack ('Headset' or 'Monitor') and the monitor volume is adjusted.

If these steps do not resolve your issue, please refer to the Warranty & Support section for further assistance.

## WARRANTY & SUPPORT

---

ALPOWL is committed to providing high-quality products and excellent customer service. Your Podcast Equipment Bundle comes with:

- **365 Days No-Reason Replacement Service:** Enjoy peace of mind with a full year replacement service.
- **Lifetime Technology Support:** Our professional after-sales team is available to assist you with any technical questions or issues you may encounter throughout the product's lifespan.

For any questions or support needs, please contact our ALPOWL professional after-sales team. We are dedicated to helping you solve any problems and ensure your complete satisfaction.