Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Jectse Jectsexdmq59afko-11

Jectse WiFi Security Camera 1080P with Back Clip (USA Version)

Model: Jectsexdmq59afko-11

Introduction

This manual provides detailed instructions for the setup, operation, and maintenance of your Jectse WiFi Security Camera 1080P with Back Clip. Please read this manual thoroughly before using the device to ensure proper functionality and safety.

Product Overview

The Jectse WiFi Security Camera is a versatile indoor surveillance device featuring 1080P HD resolution, infrared night vision, two-way audio, and motion detection capabilities. It is designed for easy placement with a convenient back clip.

Key Features:

- **2MP HD Camera:** Captures video at a maximum resolution of 1920x1080p for clear image quality.
- **Infrared Night Vision:** Equipped with 4 infrared light balls, providing clear night vision up to 8 meters.
- **Two-Way Voice Intercom:** Built-in microphone and speaker allow for real-time two-way communication.
- **Motion Detection Alarm:** Detects moving objects, automatically captures video, and sends alerts to your mobile phone.
- **Secure Storage:** Supports external memory cards up to 256GB (not included) for cyclic storage.
- **Long-Lasting Battery:** Integrated 1100 mAh lithium battery provides approximately 5 hours of operation.

Camera Components:




RESET

Image: Front view of the Jectse WiFi Security Camera, showing the lens and indicator light.

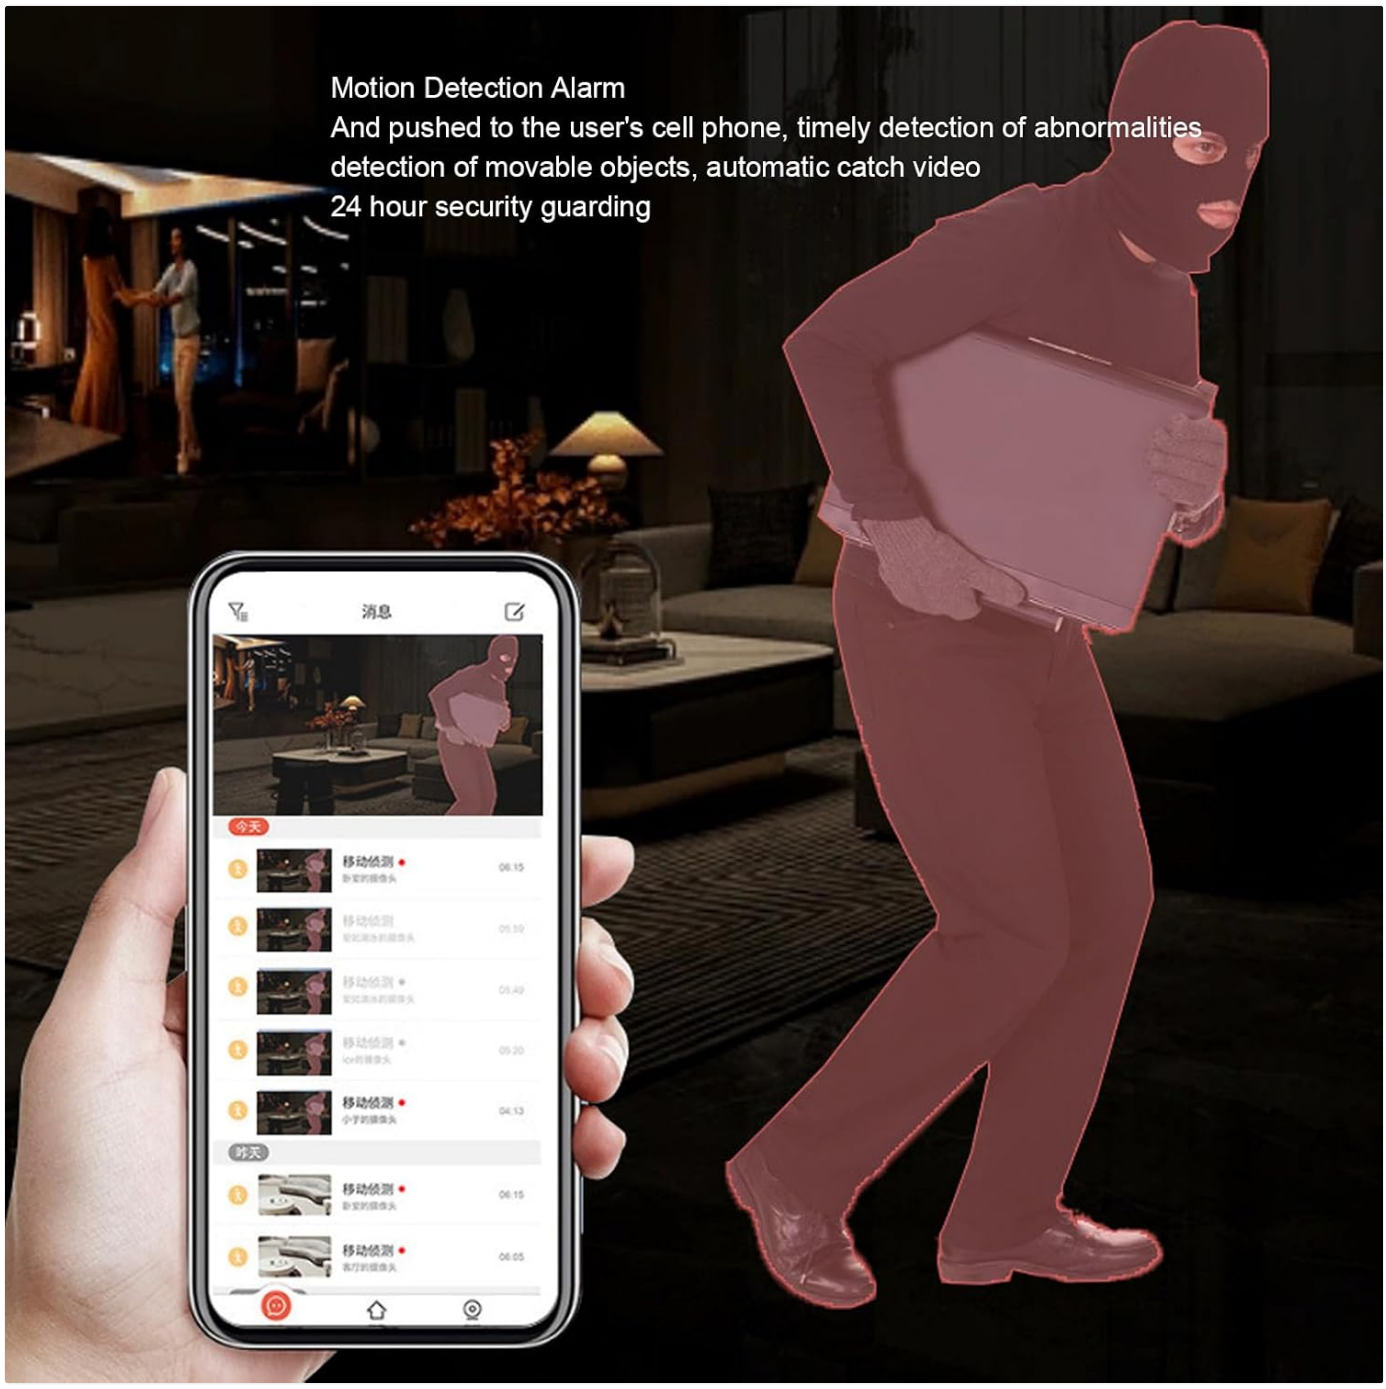


Image: Side view of the camera, highlighting the power button and reset button.



Image: The camera shown alongside its USB charging cable.

Setup Instructions

1. **Charge the Camera:** Before first use, fully charge the camera using the provided USB cable and a standard USB power adapter (not included). The indicator light will show charging status.
2. **Insert Memory Card (Optional):** If you wish to store recordings locally, insert a compatible memory card (up to 256GB, not included) into the designated slot. Ensure the camera is powered off before inserting or removing the card.
3. **Download the App:** Download the "Star Eye" application from your mobile device's app store (iOS or Android).
4. **Power On:** Press and hold the power button on the camera until the indicator light turns on.

5. **Connect to Wi-Fi:**
    - Open the "Star Eye" app and create an account or log in.
    - Follow the in-app instructions to add a new device. This typically involves scanning a QR code displayed on your phone with the camera, or connecting to the camera's temporary Wi-Fi hotspot.
    - Select your home Wi-Fi network and enter the password when prompted.
    - Wait for the camera to connect to your Wi-Fi network. The indicator light will change to confirm a successful connection.
6. **Placement:** Use the back clip to securely attach the camera to a desired indoor location, ensuring it has a clear view of the area you wish to monitor.

Operating Instructions

Live View:

Once connected, open the "Star Eye" app and select your camera to view the live feed. You can typically pinch to zoom or pan the view within the app.

Two-Way Audio:

In the live view, locate the microphone icon in the app. Tap and hold to speak through the camera's speaker, and release to listen. The camera has a built-in speaker and microphone for this function.

Motion Detection and Alerts:



Image: Diagram illustrating the multi-layered lens system designed for enhanced image quality.

The camera is equipped with motion detection. When motion is detected, the camera will automatically capture video and send an alert notification to your mobile phone via the "Star Eye" app. You can adjust motion detection sensitivity and alert settings within the app.

Image: A mobile phone screen showing a list of motion detection events and video captures from the camera.

Night Vision:

The camera automatically switches to infrared night vision mode in low-light conditions. The 4 infrared lights provide clear black and white video up to 8 meters in darkness.

Recording and Playback:

Recordings are saved to the inserted memory card (if present) or to cloud storage (if subscribed through the app). Access recorded footage through the "Star Eye" app for playback. The camera supports cyclic storage, overwriting the oldest footage when the memory card is full.

Maintenance

- **Cleaning:** Use a soft, dry cloth to clean the camera lens and body. Do not use liquid cleaners or abrasive materials.
- **Firmware Updates:** Regularly check the "Star Eye" app for available firmware updates to ensure optimal performance and security.
- **Battery Care:** To prolong battery life, avoid exposing the camera to extreme temperatures. If storing for extended periods, charge the battery to about 50%.
- **Memory Card Management:** Periodically review and back up important footage from your memory card. Format the memory card through the app if you experience recording issues.

Troubleshooting

Problem	Possible Solution
Camera not connecting to Wi-Fi	◦ Ensure your Wi-Fi network is 2.4GHz (5GHz is not supported). ◦ Check Wi-Fi password for correctness. ◦ Move the camera closer to the Wi-Fi router. ◦ Reset the camera using the reset button and try setup again.
Poor image quality	◦ Clean the camera lens with a soft cloth. ◦ Ensure adequate lighting in the monitored area. ◦ Check your internet connection speed.
Motion detection not working	◦ Verify motion detection is enabled in the "Star Eye" app settings. ◦ Adjust motion detection sensitivity. ◦ Ensure the camera's view is not obstructed.
Battery drains quickly	◦ Reduce the frequency of live view access. ◦ Ensure the camera is not in an area with constant motion, triggering continuous recording. ◦ Check for recent firmware updates.

Specifications

Model Number	Jectsexdmq59afko-11
Resolution	1920 x 1080p (2MP)
Night Vision Range	Up to 8 meters
Battery Capacity	1100 mAh Lithium Battery

Approx. Battery Life	5 hours
Memory Card Support	Up to 256GB (external, not included)
Connectivity	Wi-Fi (2.4GHz only)
App Compatibility	Star Eye (iOS/Android)
Material	ABS
Dimensions	Approx. 11 x 11 x 4 cm
Weight	Approx. 129 grams
Power Consumption	1 Watt
Country of Origin	China

Warranty Information

Specific warranty details for this product are not provided in the available information. Please refer to the retailer's return policy or contact the seller directly for warranty inquiries.

Support

For technical support or further assistance, please refer to the "Star Eye" application's help section or contact the manufacturer/seller through the platform where the product was purchased. Contact information was not available in the provided product data.

© 2024 Jectse. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0D1DH8X1X

More documents and user manuals: **https://manuals.plus/**