



[Manuals.plus](#) /

› [Yamnweo](#) /

› Yamnweo GH7 Professional 7-Channel Mixer User Manual

## Yamnweo GH7 7Channel

# Yamnweo GH7 Professional 7-Channel Mixer User Manual

Model: GH7 7Channel

## 1. INTRODUCTION

---

The Yamnweo GH7 Professional Mixer is a versatile 7-channel audio mixing console designed for a wide range of applications including recording, DJ performances, stage events, and karaoke. It features multiple input options, advanced sound shaping controls, and modern connectivity for an enhanced audio experience.



Figure 1: Yamnweo GH7 Professional 7-Channel Mixer overview.

## 2. SETUP

### 2.1 Unboxing and Initial Inspection

Carefully remove the mixer and all accessories from the packaging. Inspect for any signs of damage. Ensure all components listed below are present:

- Yamnweo GH7 Mixer Unit
- Power Adapter
- User Manual (this document)

Your browser does not support the video tag.

Video 1: Unboxing and overview of the Yamnweo GH7 Mixer and its components.

### 2.2 Power Connection

Connect the provided power adapter to the "AC IN" port on the rear of the mixer. Plug the other end of the power adapter into a standard 110V AC power outlet. Ensure the power switch is in the OFF position before connecting. Once connected, you can switch the power ON.

# Yamnweo

## VERSATILE CONNECTIVITY

# Empower your creativity, master your mix



Figure 2: Rear panel showing power input and other connections.

## 2.3 Connecting Audio Devices

The GH7 mixer offers various input and output options:

- **Microphone Inputs (MIC 1-7):** Use XLR or 1/4" TRS cables for microphones.
- **Line Inputs (LINE):** Use 1/4" TRS cables for instruments or other line-level devices.
- **Stereo Input (MIC 8 / LINE):** For stereo sources.
- **Main Output (MAIN OUTPUT L/R):** Connect to amplifiers or powered speakers using RCA or 1/4" cables.
- **Headphone Jack (PHONE):** For monitoring audio.
- **USB Interface:** Connect to a computer for recording or playback, or insert a USB drive for MP3 playback.

Product size : 23.9 X 21.2 X 2.9(Bottom height) - 3.7(Head height) cm  
Packing weight : 1.9kg

# Panel Instructions

**GH-4**  
4 Channel Audio Mixer

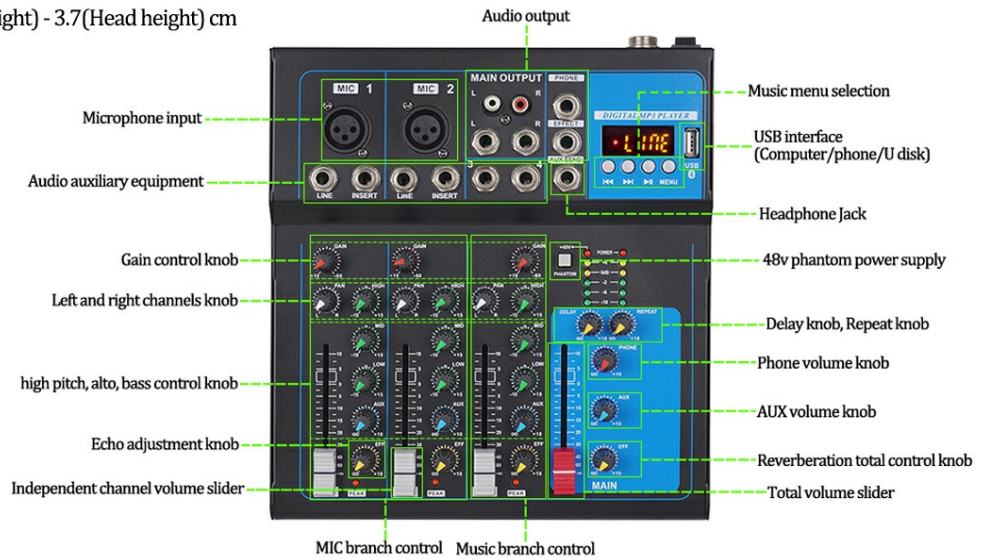


Figure 3: Detailed panel instructions for the GH7 mixer, highlighting various inputs and controls.

## 3. OPERATING INSTRUCTIONS

### 3.1 Channel Controls

Each channel (1-7) on the GH7 mixer features individual controls for precise audio shaping:

- **GAIN Knob:** Adjusts the input sensitivity for each microphone or line input.
- **HIGH, MID, LOW Knobs:** Three-band equalizer for adjusting treble, midrange, and bass frequencies.
- **AUX Knob:** Controls the level sent to the auxiliary output for external effects or monitoring.
- **EFF Knob:** Adjusts the level of the built-in reverb/delay effect applied to the channel.
- **PAN Knob:** Pans the audio signal between the left and right stereo channels.
- **Volume Slider:** Controls the overall output level of the individual channel.



3. On your Bluetooth device, search for "Yamnweo" or a similar device name and pair.
4. Once connected, you can play audio from your device through the mixer.



Figure 5: Illustrates Bluetooth connectivity with a smartphone.

### 3.4 USB Playback and Recording

The USB interface allows for MP3 playback from a USB drive or direct connection to a computer for recording and playback.

- **USB Drive Playback:** Insert a USB flash drive containing MP3 files into the USB port. Use the built-in controls (play/pause, skip tracks) on the digital MP3 player to manage playback.
- **PC Connection:** Connect the mixer to your computer via a USB cable. The mixer will be recognized as an audio device, allowing you to record audio from the mixer to your computer or play audio from your computer through the mixer.



Figure 6: The GH7 mixer connected to a laptop for recording or playback.

## 4. MAINTENANCE

---

Proper maintenance ensures the longevity and optimal performance of your Yamnweo GH7 mixer.

- **Cleaning:** Use a soft, dry cloth to wipe down the surface of the mixer. For stubborn dirt, a slightly damp cloth can be used, followed by a dry cloth. Avoid abrasive cleaners or solvents.
- **Dust Protection:** When not in use, cover the mixer to prevent dust accumulation, especially on the faders and knobs.
- **Storage:** Store the mixer in a cool, dry place away from direct sunlight, extreme temperatures, and high humidity.
- **Cable Management:** Avoid bending or kinking cables excessively, as this can damage internal wiring.

## 5. TROUBLESHOOTING

---

If you encounter issues with your Yamnweo GH7 mixer, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No sound output	Power not connected or switched on. Main volume slider is down. Individual channel volume slider is down. Incorrect input/output connections. Damaged cables.	Check power connection and switch. Increase MAIN volume. Increase individual channel volume. Verify all cables are correctly connected to appropriate ports. Test with different cables.
No sound from microphone	Microphone not connected properly. GAIN knob too low. 48V Phantom Power not enabled for condenser mics. Faulty microphone.	Ensure microphone is securely connected. Increase GAIN for the respective channel. Activate +48V phantom power if using a condenser microphone. Test with a different microphone.
Bluetooth connection issues	Mixer not in Bluetooth mode. Device too far from mixer. Interference.	Press MODE button until "BLUE" is displayed. Move Bluetooth device closer to the mixer. Reduce other wireless interference.

## 6. SPECIFICATIONS

Feature	Detail
Model	GH7 7Channel
Brand	Yamweo
Number of Channels	7 (MIC/LINE mono inputs + 1 stereo input)
Phantom Power	+48V
Connectivity Technology	Bluetooth, USB
Effects	Reverb, Delay
Item Weight	5.85 pounds
Product Dimensions	13 x 8.97 x 1.61 inches (33.02 x 22.78 x 4.09 cm)
Power Source	Corded Electric
Voltage	110 Volts

## 7. WARRANTY AND SUPPORT

For information regarding product warranty, returns, or technical support, please refer to the purchase platform or contact Yamweo customer service directly. Protection plans may also be available for extended coverage.

### Available Protection Plans (as of purchase date):

- 2-Year Protection Plan: \$5.99
- 3-Year Protection Plan: \$7.99
- Complete Protect: \$16.99/month (covers all eligible past and future purchases)

*Note: Protection plan availability and terms are subject to change. Please verify details at the time of purchase.*

© 2024 Yamnweo. All rights reserved.