Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

ANRAN C3

ANRAN 2K Wireless Outdoor WiFi Surveillance Camera

INSTRUCTION MANUAL

1. Introduction

Thank you for choosing the ANRAN 2K Wireless Outdoor WiFi Surveillance Camera. This manual provides detailed instructions for the setup, operation, maintenance, and troubleshooting of your new security camera system. Please read this manual thoroughly before use to ensure proper installation and optimal performance.

2. Product Overview

The ANRAN C3 camera offers advanced surveillance capabilities with its 2K resolution, integrated solar panel for continuous power, and smart detection features. It is designed for outdoor use and provides reliable monitoring day and night.

Key Features:

- **2K Clear Image Quality:** Provides superior image quality for recognizing faces and details.
- **Color Night Vision:** Equipped with powerful spotlights for clear, colored images in total darkness.
- **Integrated Solar Panel:** Enhances charging speed using solar energy, reducing the need for battery changes.
- **100% Wireless:** No power or network cables required for easy installation.
- **PIR Human Detection:** Highly sensitive PIR and radar sensors for quick wake-up and reduced false alarms.
- **Two-Way Audio:** Real-time communication with individuals at the monitored location.
- **Remote Control & SD Card Storage:** Control via the "ANRAN" app and record to an SD card (up to 128GB, not included).
- **IP65 Weatherproof:** Durable design for outdoor environments.

Product Components:

The package includes the ANRAN C3 camera(s), mounting bracket, and screws. Please ensure all components are present before proceeding with installation.



Image: Two ANRAN C3 wireless outdoor surveillance cameras, showcasing their compact design and integrated solar panels.

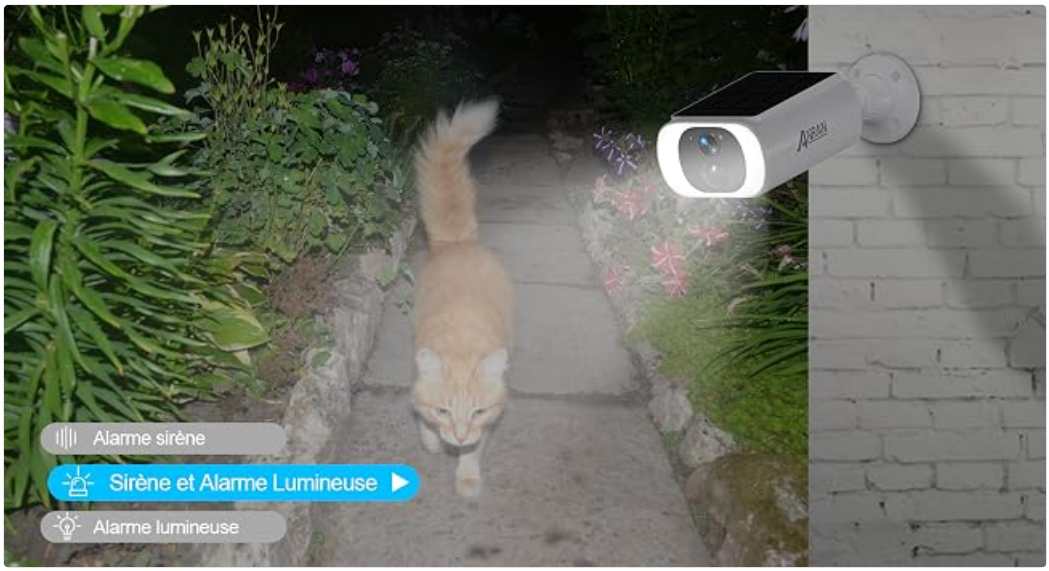


Image: Visual representation of the ANRAN 2K camera's energy efficiency with its integrated solar panel.

3. Setup

Follow these steps for initial setup and installation of your ANRAN C3 camera:

1. **Charge the Camera:** Before first use, fully charge the camera using the provided USB cable. Although it has a solar panel, an initial full charge ensures optimal battery performance.
2. **Download the App:** Download the "ANRAN" or "Cloudedge" app from the Google Play Store (for Android) or the App Store (for iOS).
3. **Register an Account:** Open the app and follow the on-screen instructions to register a new account or log in if you already have one.
4. **Add Device:** In the app, select to add a new device. Power on the camera. The camera will enter pairing mode.
5. **Connect to Wi-Fi:** Ensure your smartphone is connected to a 2.4 GHz Wi-Fi network. The camera only supports 2.4 GHz Wi-Fi. Follow the app's instructions to connect the camera to your Wi-Fi network, typically by scanning a QR code displayed on your phone screen with the camera.
6. **Mount the Camera:** Choose a suitable outdoor location with good Wi-Fi signal and direct sunlight exposure for the solar panel. Use the provided mounting bracket and screws to securely attach the camera to a wall or desired surface. Ensure the camera is positioned to capture the desired surveillance area.



Image: Simplified setup steps for the ANRAN camera, from app download to live viewing.



Image: A person demonstrating the installation of the ANRAN C3 camera on a wall.

4. Operating

Once your camera is set up, you can utilize its various functions through the ANRAN app:

Live View:

Open the ANRAN app and select your camera to view the live feed. You can monitor your property in real-time from

anywhere.



Image: Example of a clear 2K image captured by the camera, showcasing its high definition.

Two-Way Audio:

Use the microphone and speaker icons in the app to engage in two-way communication. This allows you to speak to visitors or deter intruders.



Image: Demonstration of the two-way audio feature, allowing communication with individuals at your door.

Motion Detection & Notifications:

The camera's PIR human detection system minimizes false alarms. When motion is detected, you will receive instant notifications on your smartphone. You can adjust sensitivity and define detection zones within the app.

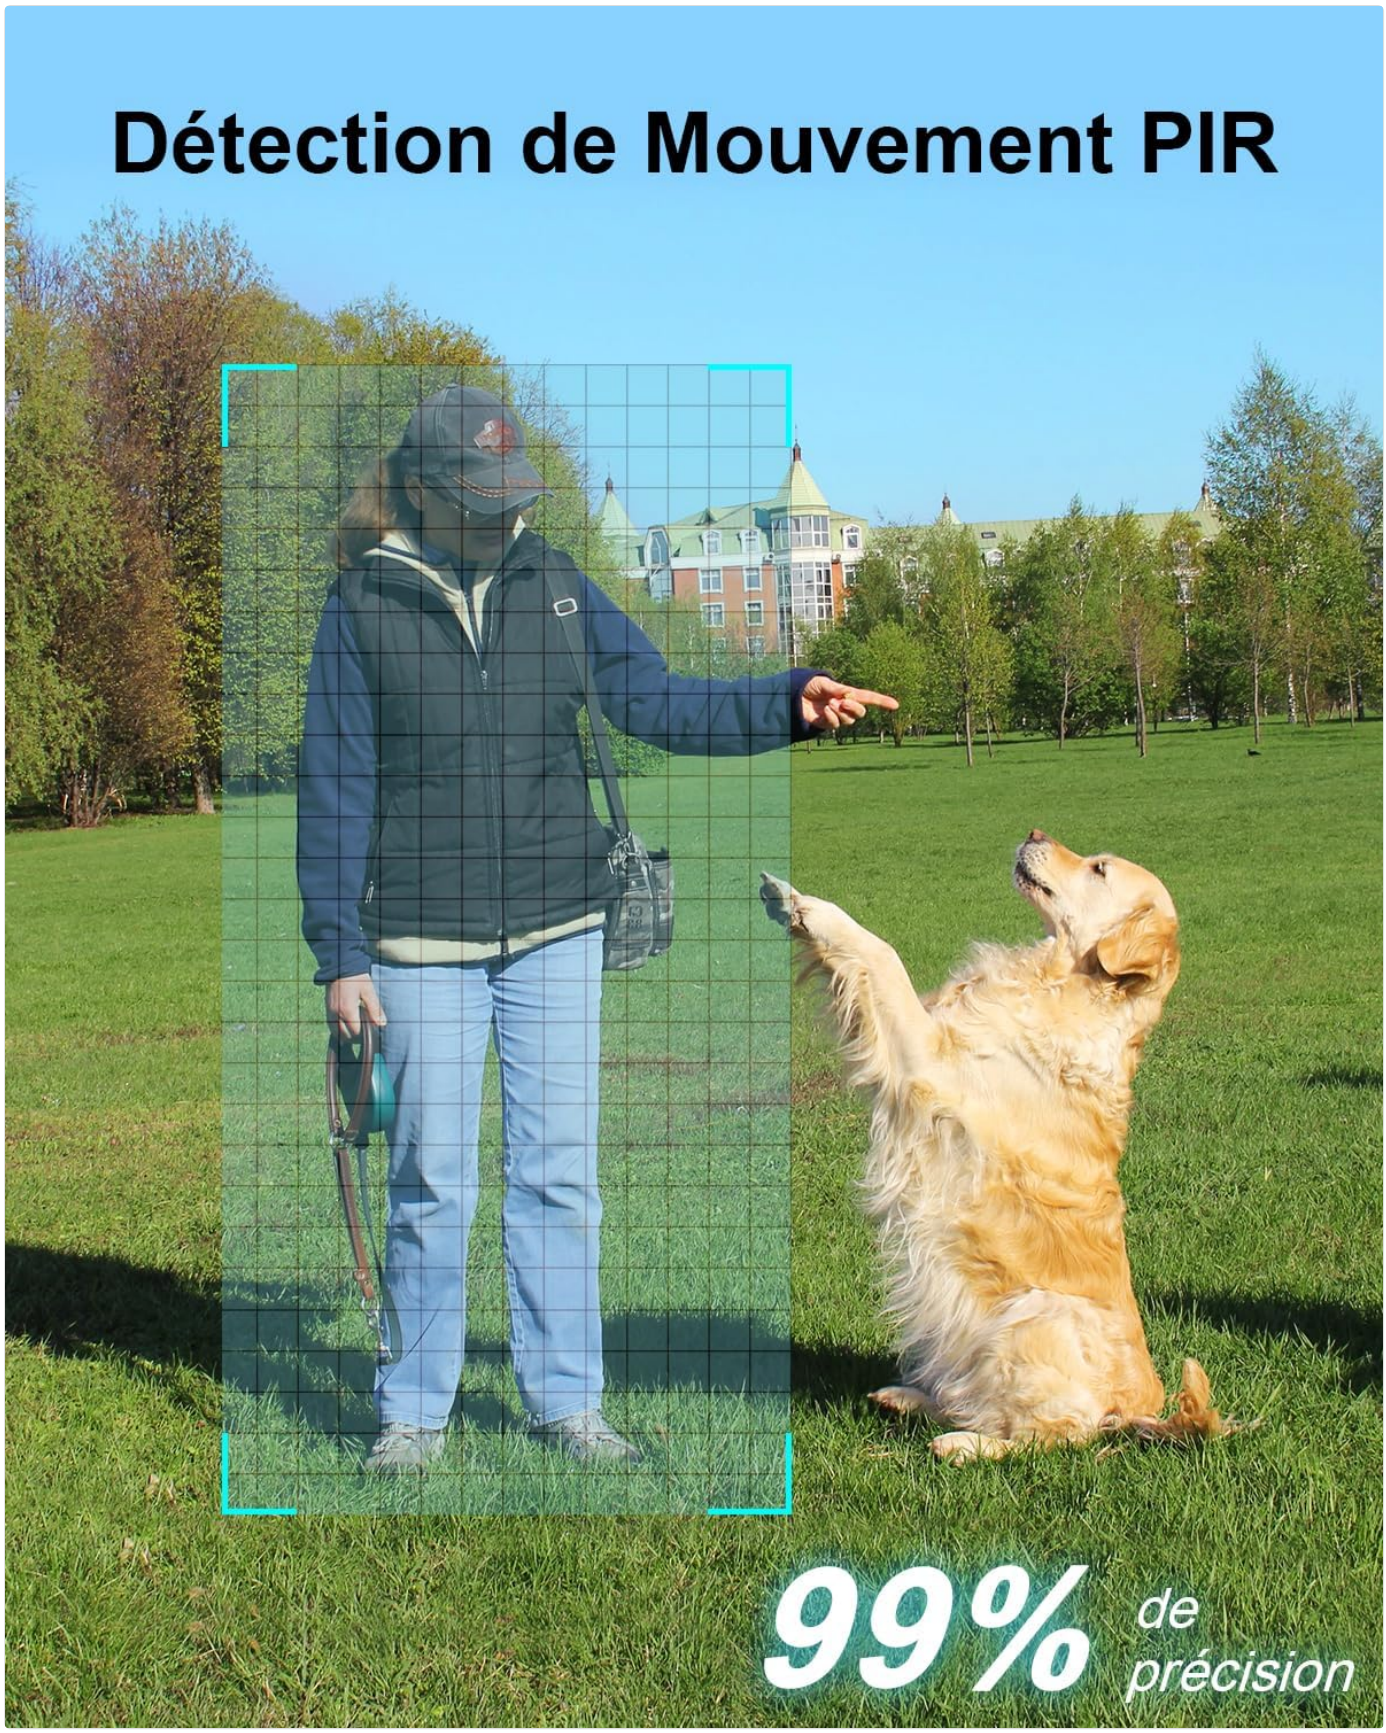


Image: Visual representation of the PIR human detection feature, highlighting its accuracy.

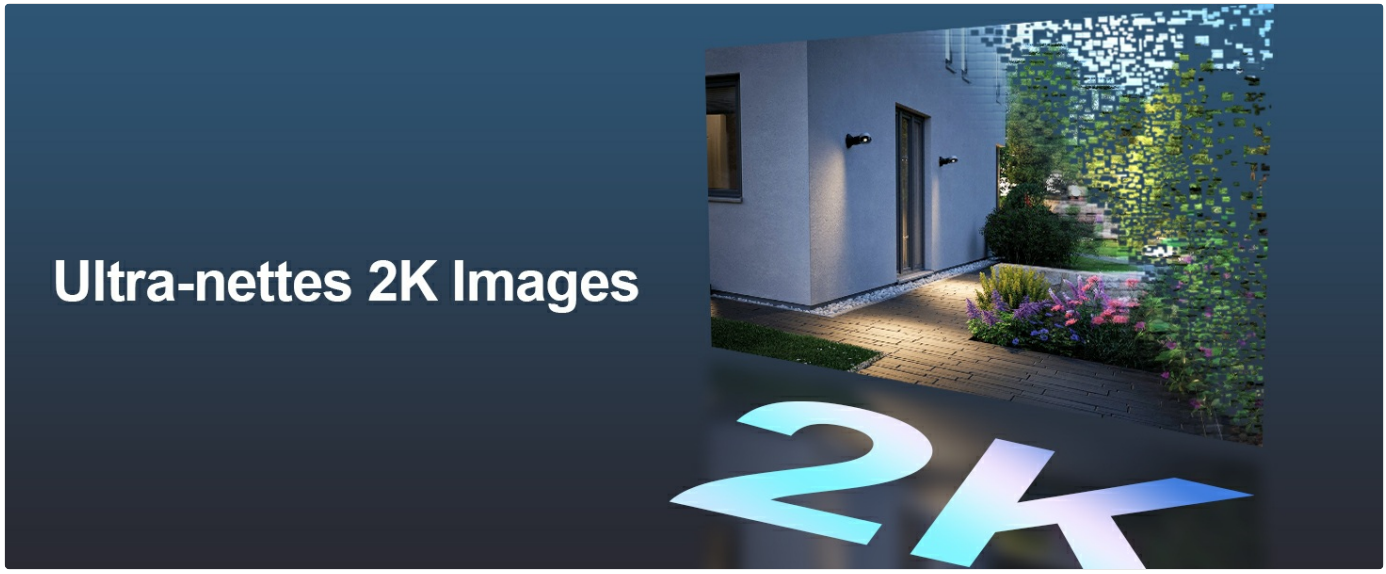


Image: Illustrates how to define specific detection zones to receive alerts only from desired areas.

Night Vision:

The camera automatically switches to night vision mode in low light conditions. The built-in spotlights provide color night vision for enhanced clarity.

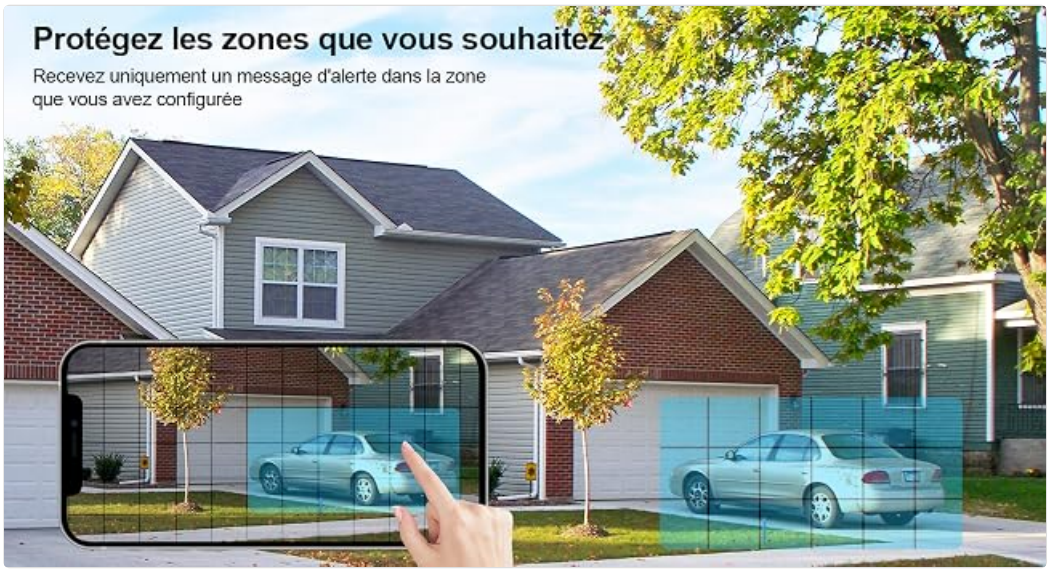


Image: Highlights features like high brightness spot, 4X digital zoom, and IP65 waterproof rating.

Storage Options:

The camera supports local storage via a Micro SD card (up to 128GB, not included) and cloud storage services (subscription may be required).



Image: Illustrates the available cloud and local (SD card) storage options for recorded footage.

5. Maintenance

To ensure the longevity and optimal performance of your ANRAN C3 camera, follow these maintenance guidelines:

- **Cleaning:** Periodically clean the camera lens and solar panel with a soft, damp cloth to remove dust, dirt, or debris. Avoid using harsh chemicals or abrasive materials.
- **Solar Panel Efficiency:** Ensure the integrated solar panel is free from obstructions (e.g., leaves, snow) to maximize sunlight absorption and charging efficiency.
- **Battery Health:** While the solar panel provides continuous charging, extreme weather conditions or prolonged periods without direct sunlight may affect battery levels. If the battery level drops significantly, consider temporarily charging the camera via USB.
- **Firmware Updates:** Regularly check the ANRAN app for available firmware updates. Updates often include performance improvements, bug fixes, and new features. Follow the app's instructions to update the camera's firmware.

6. Troubleshooting

If you encounter issues with your ANRAN C3 camera, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Camera fails to connect to Wi-Fi.	Incorrect Wi-Fi password; camera too far from router; 5GHz Wi-Fi network; QR code not scanned properly.	Ensure correct 2.4 GHz Wi-Fi password. Move camera closer to router. Confirm router is broadcasting 2.4 GHz. Rescan QR code clearly.
Poor image quality.	Dirty lens; low light conditions; network bandwidth issues.	Clean the camera lens. Ensure sufficient lighting or check night vision settings. Verify stable Wi-Fi connection.
Frequent false alarms.	High motion sensitivity; environmental factors (e.g., trees, insects, rain).	Adjust motion detection sensitivity in the app. Define specific detection zones to exclude irrelevant areas.

Problem	Possible Cause	Solution
Battery drains quickly.	Insufficient sunlight for solar panel; frequent motion events; extreme temperatures.	Ensure solar panel has direct sunlight. Reduce motion detection frequency or sensitivity. Charge camera via USB if needed.
Two-way audio not working.	Microphone/speaker muted in app; network issues.	Check audio settings in the app. Ensure stable internet connection.

If the problem persists, please contact ANRAN customer support for further assistance.

7. Specifications

Detailed technical specifications for the ANRAN C3 camera:

Feature	Specification
Model	C3
Video Recording Resolution	3MP (2K)
Color	2Pcs C3 (White)
Number of Channels	2
Wireless Communication Technology	Wi-Fi (2.4 GHz)
Form Factor	Bullet
Installation Type	Screw-in / Wall Mount
Night Vision Range	15 Meters
Material	Plastic
Voltage	5 Volts
Power	1 Watts
Item Dimensions (L x W x H)	17 x 17 x 17 centimeters
Digital Zoom	4x Multiplier
Battery Composition	Lithium-ion (included)
Power Source	Solar Powered
Indoor/Outdoor Use	Outdoor
Compatible Devices	Smartphone (Android, iOS)

8. Warranty and Support

ANRAN is committed to providing high-quality products and excellent customer service.

Manufacturer Warranty:

This product comes with a**2-year manufacturer's warranty**. Please retain your proof of purchase for warranty claims.

Customer Support:

For technical assistance, troubleshooting, or any inquiries regarding your ANRAN product, please contact our customer support team. We offer lifetime technical support and 7x24 online service.



Image: Overview of ANRAN's customer service commitments, including warranty and support availability.

© 2024 ANRAN. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0D1Q64GC4

More documents and user manuals: **https://manuals.plus/**