ANTELA F1As202-EU

ANTELA Smart Plug WiFi 2.4/5GHz with Energy Monitoring - User Manual

Model: F1As202-EU

1. Introduction and Overview

Thank you for choosing the ANTELA Smart Plug. This device allows you to control your home appliances remotely, monitor energy consumption, and automate your home with ease. Please read this manual carefully before use to ensure proper installation and operation.

Key Features:

- **Dual-Band WiFi Connectivity:** Supports both 2.4GHz and 5GHz WiFi networks for higher speeds, lower latency, and more reliable connections. Compatible with all standard routers.
- **Energy Monitoring:** Provides real-time and historical data on the energy consumption of connected appliances, helping you manage and reduce your electricity usage.
- **Remote Control:** Control your appliances from anywhere using the Smart Life or Tuya Smart application on your smartphone or tablet.
- **Voice Control:** Seamlessly integrates with Amazon Alexa and Google Assistant for convenient hands-free control of your devices.
- **Timer and Scheduling:** Set custom schedules, timers, and countdowns to automatically turn appliances on or off, enhancing convenience and energy efficiency.
- **Enhanced Safety:** Constructed with high-quality flame-retardant materials and features overload protection, which automatically disconnects power if the current exceeds 16A.

2. Setup Guide

2.1 What's in the Box

- ANTELA Smart Plug(s)
- User Manual

2.2 App Download and Registration

1. Download the 'Smart Life' or 'Tuya Smart' app from the App Store (iOS) or Google Play Store (Android).
2. Register an account or log in if you already have one.

2.3 Device Pairing

1. Plug the ANTELA Smart Plug into a power outlet.
2. Open the Smart Life/Tuya Smart app. Tap '+' or 'Add Device'.
3. Select 'Electrical Outlet' or 'Smart Plug' from the device list.
4. Follow the in-app instructions to connect the smart plug to your 2.4GHz or 5GHz WiFi network. Ensure your phone is connected to the same WiFi network during pairing.
5. Once connected, the device indicator light will stop blinking and remain solid. You can now rename your smart plug for easier identification.

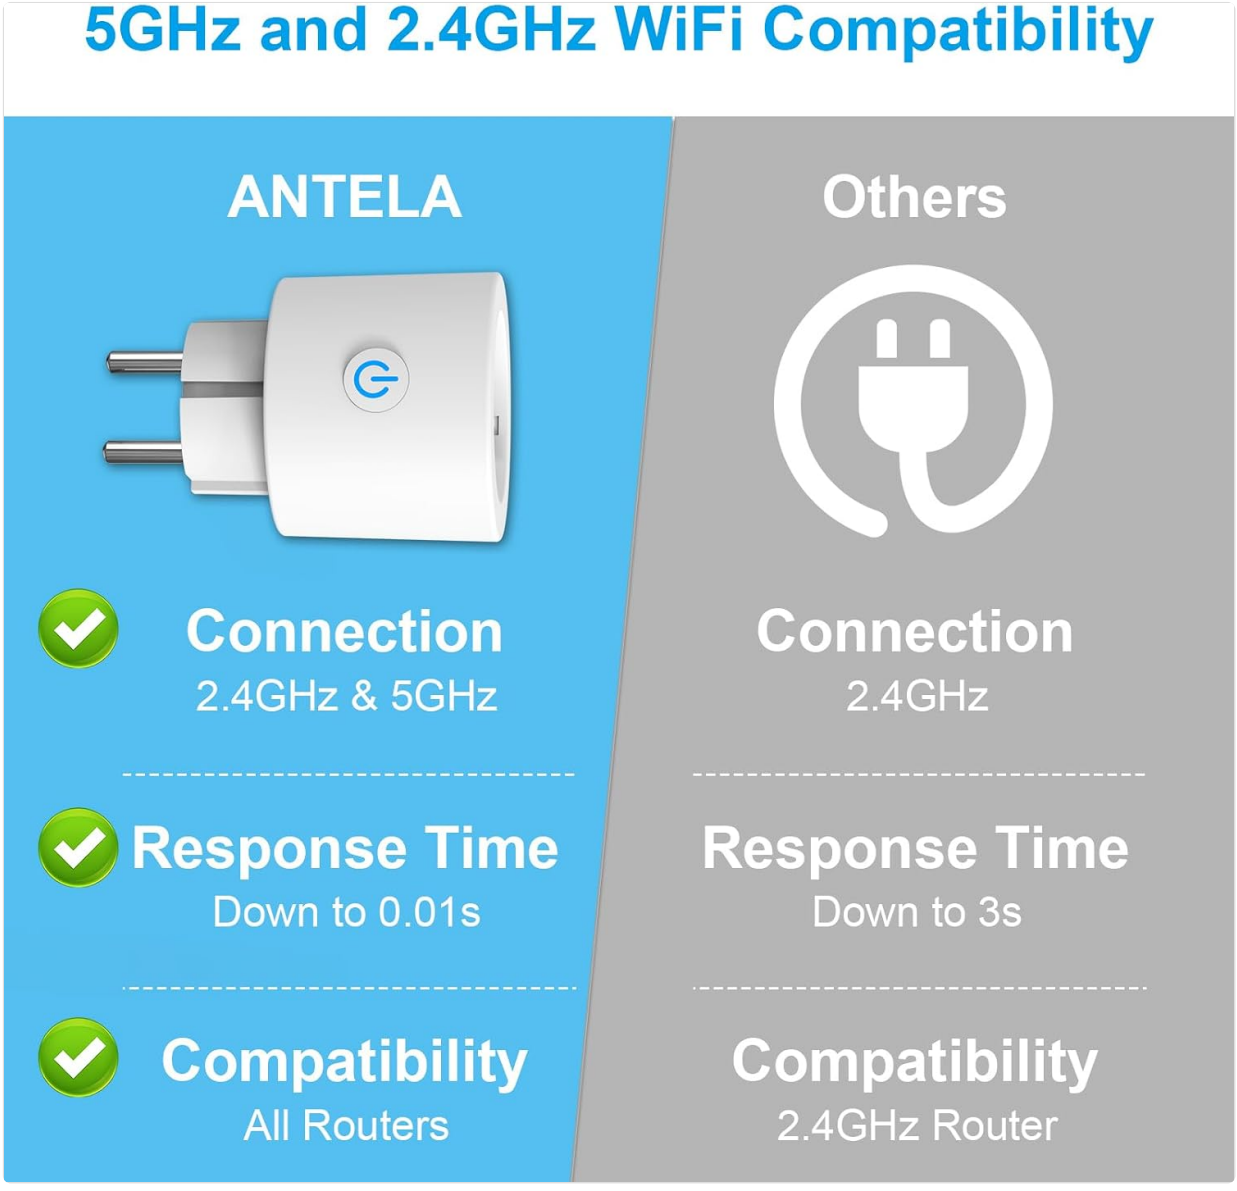


Image: The ANTELA smart plug supports both 2.4GHz and 5GHz WiFi networks, offering faster response times and broader router compatibility compared to traditional 2.4GHz plugs.

3. Operating Instructions

3.1 Remote Control via App

After successful pairing, you can control your smart plug from anywhere with an internet connection:

- Tap the device icon in the app to turn it on or off.
- Access device settings to configure advanced features.



Image: People using their smartphones to remotely control smart plugs connected to various household appliances, demonstrating the convenience of app-based remote management.

3.2 Voice Control (Alexa & Google Home)

To enable voice control:

1. In the Smart Life/Tuya Smart app, go to 'Me' > 'More Services' > 'Alexa' or 'Google Assistant'.
2. Follow the instructions to link your Smart Life/Tuya Smart account with your Alexa or Google Home account.
3. Once linked, you can use voice commands such as:
    - "Alexa, turn on the living room light."
    - "Hey Google, turn off the coffee maker."



Image: Visual representation of the smart plug's compatibility with Google Home and Alexa, indicated by green checkmarks, and explicit non-support for Apple HomeKit.

3.3 Energy Monitoring

The app provides detailed energy consumption data:

- Tap on the smart plug in the app to view its energy statistics.
- Monitor real-time power usage, daily, monthly, and yearly consumption.



Image: A smart plug connected to a lamp, with an overlay showing a graph of energy consumption over time and a smartphone screen displaying detailed energy monitoring statistics within the app.

3.4 Timer and Scheduling

Automate your devices with schedules and timers:

- **Schedule:** Set specific times for the plug to turn on or off on chosen days of the week.
- **Timer:** Set a countdown for the plug to turn off after a specified duration.
- **Random/Circulate:** Some apps offer advanced scheduling options for added convenience or security.

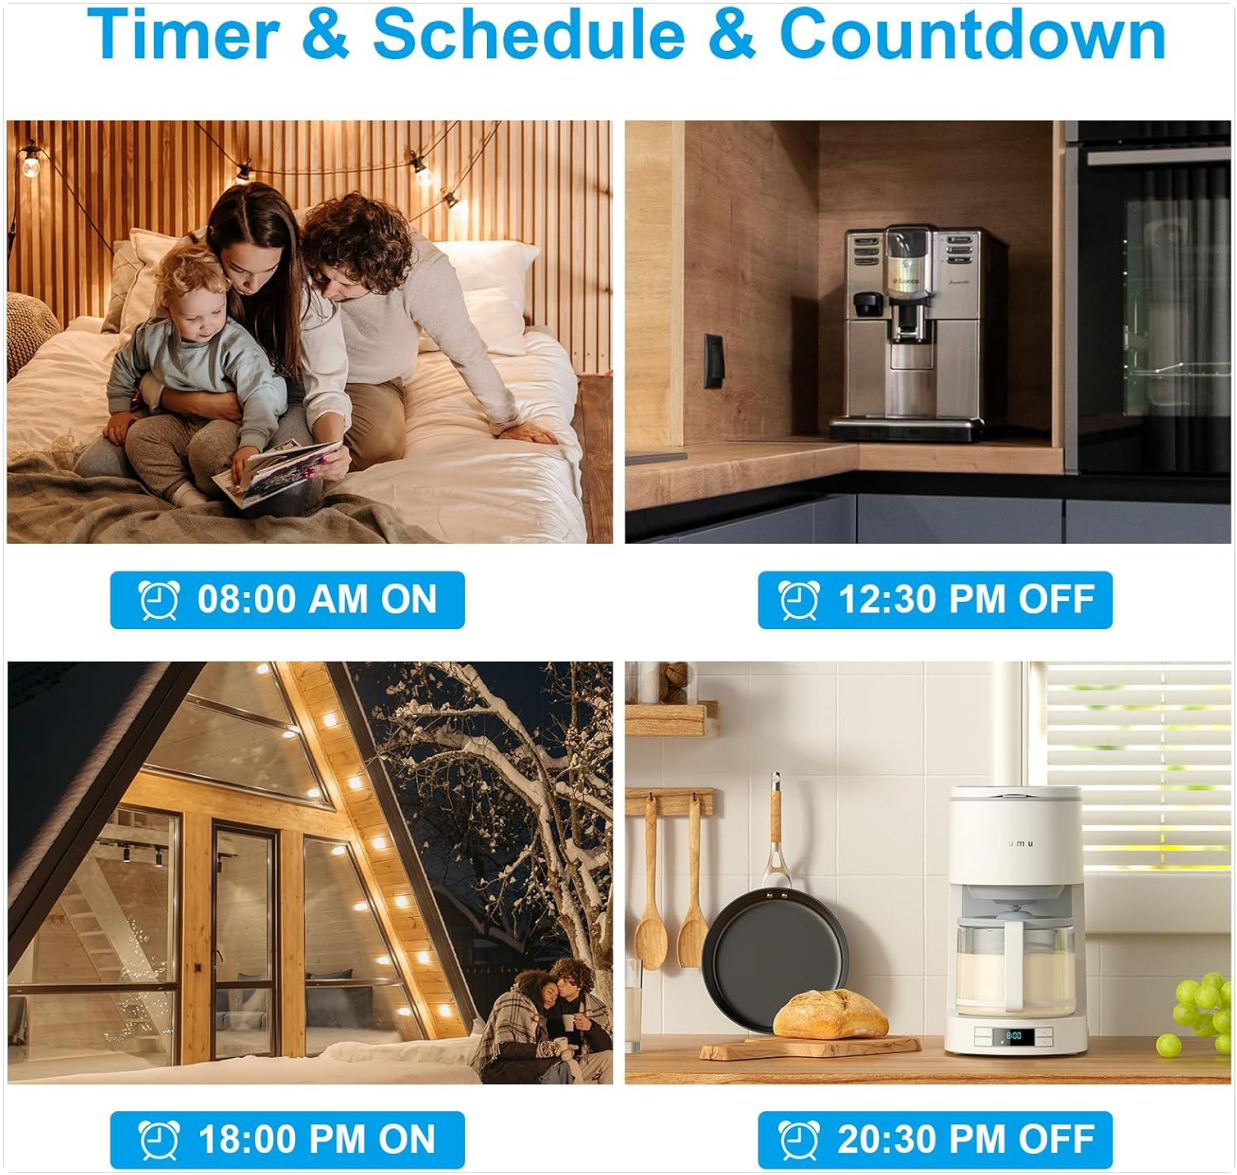


Image: A collage demonstrating various timer and scheduling scenarios, such as turning lights on at 8:00 AM, a coffee machine off at 12:30 PM, outdoor lights on at 6:00 PM, and another coffee maker off at 8:30 PM.

3.5 Family Sharing

Share control of your smart plugs with family members:

- In the app, navigate to the device settings and select 'Share Device'.
- Add family members by their registered app accounts to grant them control.



Image: Two individuals viewing a smartphone screen that displays options for 'Family Sharing', allowing users to share control of the smart plug with others via the app.

4. Maintenance and Safety

4.1 General Care

- Keep the smart plug clean and dry. Wipe with a soft, dry cloth.
- Do not immerse in water or expose to excessive moisture.

4.2 Safety Precautions

- For indoor use only.
- Do not disassemble or modify the device.
- Ensure the connected appliance's power consumption does not exceed the smart plug's maximum rating (3680W, 16A).
- The smart plug features built-in child safety shutters to prevent accidental insertion of objects into the live contacts.



Image: A close-up view of the smart plug's socket, highlighting the internal child safety shutters designed to protect against accidental contact with electrical components.

4.3 Overload Protection

The smart plug is equipped with overload protection. If the connected appliance draws more than 16A, the plug will automatically cut power to prevent damage. To reset, unplug the smart plug, wait a few seconds, and then plug it back in. Ensure the connected appliance meets the power requirements.

5. Troubleshooting

5.1 Common Issues and Solutions

- **Device not connecting to WiFi:**
  - Ensure your WiFi network is 2.4GHz or 5GHz and your phone is connected to it during pairing.
  - Check if the WiFi password is correct.
  - Move the smart plug closer to your router.
  - Reset the smart plug (see 5.2).
- **Device offline in app:**
  - Check your home WiFi connection.
  - Unplug and replug the smart plug.
  - Restart your router.
- **Voice control not working:**
  - Ensure your Smart Life/Tuya Smart account is correctly linked to Alexa/Google Home.
  - Check if the device name in the app matches the name you are using in voice commands.
  - Verify your Alexa/Google Home device is online and functioning.

5.2 Resetting the Smart Plug

To reset the smart plug to factory settings, press and hold the power button on the plug for approximately 5-10 seconds until the indicator light starts blinking rapidly. This will put the device into pairing mode.

6. Specifications

Brand	ANTELA
Model Number	F1As202-EU
Color	White

Material	Plastic
Voltage	240 Volts
Power	3680 Watts
Current Rating	16 A
Switch Type	Push-button, 1-way
Electrical Plug Type	Wall Plug
Operating Mode	Automatic
Connectivity	2.4GHz / 5GHz WiFi
Certifications	CE, RoHS
Country of Origin	China

7. Warranty and Support

7.1 Warranty Information

ANTELA products are designed for reliability and performance. For specific warranty details and return policies, please refer to the purchase platform or contact ANTELA customer support directly. Typically, a 30-day return/replacement policy is offered for manufacturing defects.

7.2 Customer Support

If you encounter any issues or have questions regarding your ANTELA Smart Plug, please contact our customer support team. We are committed to providing solutions within 24 hours.

- **Contact Method:** Refer to the contact information provided on the product packaging or the ANTELA official website.
- **Online Resources:** Visit the ANTELA brand store on Amazon or our official website for FAQs and additional support.