

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [BOXPUT](#) /

› [BOXPUT Lemon TV L1 Smart Streaming TV Box User Manual](#)

BOXPUT Lemon L1

BOXPUT Lemon TV L1 Smart Streaming TV Box User Manual

Model: Lemon L1

1. INTRODUCTION

This manual provides detailed instructions for setting up and operating your BOXPUT Lemon TV L1 Smart Streaming TV Box. Please read this guide thoroughly to ensure proper use and to maximize your entertainment experience.




The BOOPUT Lemon TV L1 Smart Streaming TV Box with its voice remote.

2. WHAT'S IN THE Box

Verify that all items are present in your package:

- 1x BOOPUT Lemon TV L1 Smart Streaming TV Box
- 1x Power Adapter
- 1x HD Cable
- 1x BT Voice Control Remote (batteries not included)
- 1x User Manual

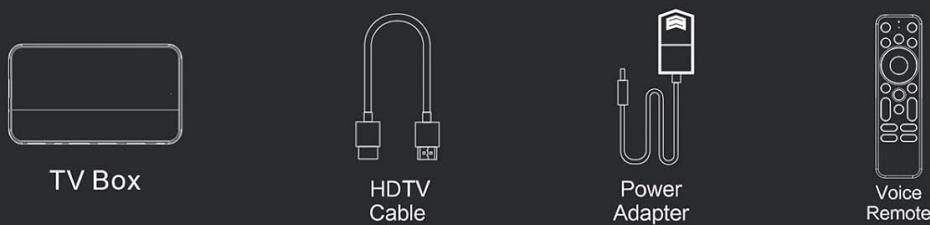

Package contents of the Lemon TV L1.

3. PRODUCT OVERVIEW

3.1 Device Dimensions and Weight

- Dimensions: 5.07 x 2.73 x 0.7 inches
- Weight: 1.03 pounds

3.2 Ports and Connections

The Lemon TV L1 features various ports for connectivity:

- **LAN:** For wired Ethernet connection.
- **AV:** Analog video/audio output.
- **HD:** HDMI output for high-definition video and audio.
- **USB (x2):** USB 2.0 ports for connecting external devices like USB drives or a mouse.
- **DC IN:** Power input port.

- **TF Card:** Memory expansion slot.



Rear and side ports of the Lemon TV L1.

4. SETUP GUIDE

4.1 Initial Connection

1. Connect the HD Cable from the Lemon TV L1's HD port to an HDMI input on your television.
2. Connect the Power Adapter to the DC IN port on the TV box, then plug the adapter into a power outlet.
3. Turn on your television and select the correct HDMI input source.

Connection Diagram



Connection diagram for the Lemon TV L1.

4.2 Bluetooth Remote Pairing

To pair the Bluetooth voice remote control:

1. Ensure the TV box is powered on and connected to your TV.
2. Insert two AAA batteries (not included) into the remote control.
3. Press and hold the 'OK' button and the 'Volume Down' button on the remote control simultaneously.
4. Keep the remote close to the TV box. Release the buttons after the remote control indicator light flashes.
5. The remote should automatically pair with the TV box. A confirmation message will appear on the screen.

4.3 Network Connection

For internet access, you can connect via Wi-Fi or Ethernet:

- **Wi-Fi:** Navigate to Settings > Network & Internet > Wi-Fi. Select your network from the available list and enter the password.
- **Ethernet:** Connect an Ethernet cable from your router to the LAN port on the TV box. The connection should be established automatically.

Your browser does not support the video tag.

Video demonstrating the connection steps and Bluetooth remote pairing for the BOXPUT Lemon TV L2, which is similar to the L1 model.

Your browser does not support the video tag.

Video guide for unboxing, installation, and network connection of an Android TV Box.


5. OPERATING INSTRUCTIONS

5.1 Navigating the User Interface

The Lemon TV L1 runs on Android 10.0 OS, providing a user-friendly interface. Use the directional buttons on your remote to navigate through menus and select applications. The 'OK' button confirms selections, and the 'Back' button returns to the previous screen.

5.2 Voice Control

The included remote control supports voice commands. Press the dedicated voice button on the remote and speak your command clearly. This allows for quick searches, app launches, and system control.

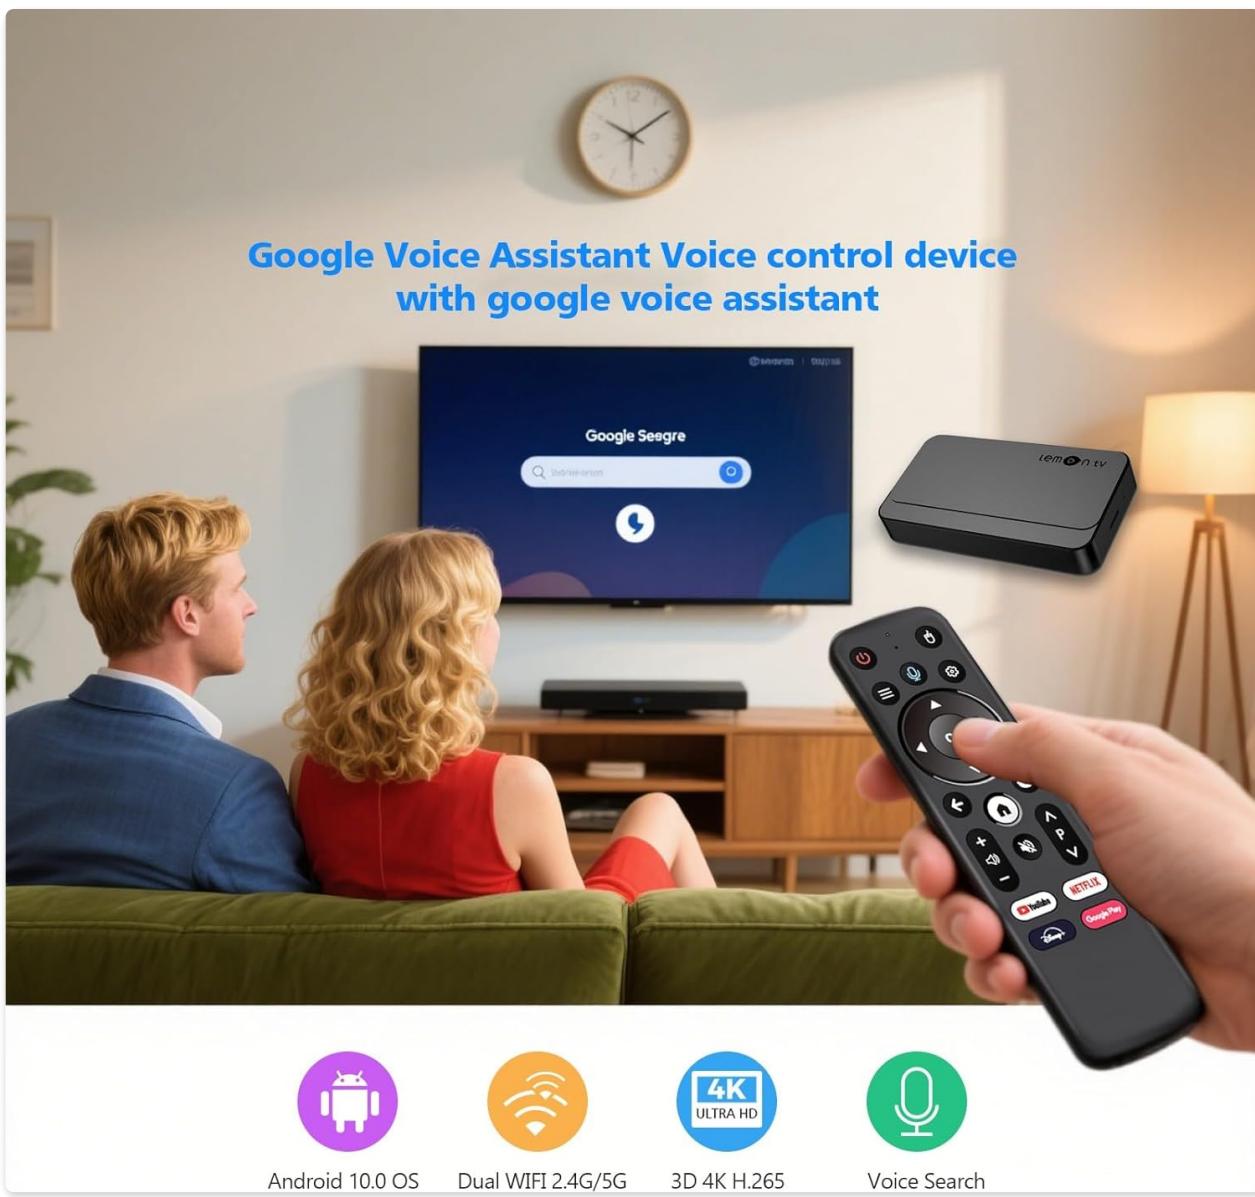

5.3 Casting and Screen Mirroring

The Lemon TV L1 supports various casting technologies, including Miracast, DLNA, and Airplay. This allows

you to share content from your mobile devices or tablets directly to your television screen.

- Access the pre-installed casting software or compatible apps to initiate screen mirroring.
- Follow the on-screen instructions on both your mobile device and the TV box to establish a connection.

Efficient video switching with the remote control.

6. KEY FEATURES

- **Android 10.0 OS & H313 Chipset:** Equipped with a stable Android 10.0 operating system and powered by the Allwinner H313 Quad Core ARM Cortex A53 Mali-450MP2 CPU and ARM G31 MP2 GPU for smooth performance.
- **Dual WIFI 2.4G/5G Connectivity:** Features built-in 2.4G/5GHz dual-band Wi-Fi and BT 5.4 for stable and fast wireless connections. Supports 10/100M Ethernet LAN.
- **4K H.265 & 3D Support:** Decodes and plays popular audio and video formats, delivering true-to-life 4K@60fps HD video quality. Supports 3D content for an immersive viewing experience.
- **Mirroring Cast & Dual USB 2.0:** Includes casting software for Miracast, DLNA, and Airplay. Two USB 2.0 ports allow for convenient connection of multiple peripherals.

4K HDR


- 4K gives you a crisper picture using four times more pixels than standard HD.
- High Dynamic Range (HDR) delivers brighter, more realistic colors and greater detail.



Understanding 4K HDR capabilities.

4K 60FPS

handle up to 60 frames per second - that's double what other set-top boxes can do. It's an advantage you'll notice naturally when you watch NBA live or play a racing game.

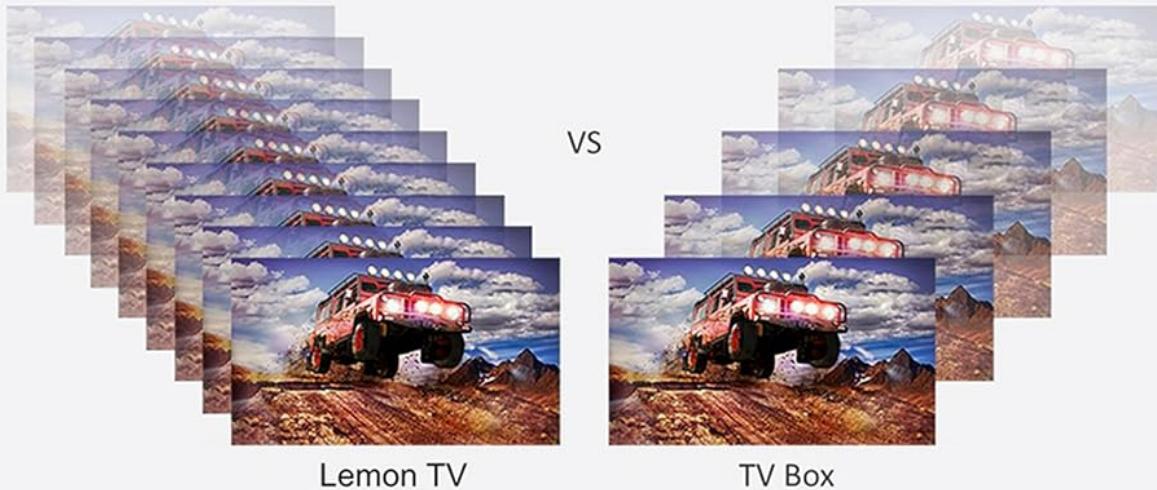

Benefits of 4K 60fps for smoother video playback.

7. SPECIFICATIONS

Feature	Detail
Brand	BOXPUT
Model Name	Lemon L1
Operating System	Android 10.0
Processor	Allwinner H313 Quad Core ARM Cortex A53
GPU	ARM G31 MP2
Connectivity Technology	Bluetooth 5.4, Ethernet, Wi-Fi (2.4G/5G Dual-Band)
Connector Type	HD (HDMI)
Resolution	4K@60fps output
Special Features	4K output, APP TV Version, BT voice remote control, Casting software (Miracast, DLNA, Airplay), 3D support
Product Dimensions	5.07 x 2.73 x 0.7 inches
Item Weight	1.03 pounds

8. TROUBLESHOOTING

8.1 Common Issues

- **No Power:** Ensure the power adapter is securely connected to the TV box and a working power outlet. Check if the power indicator light on the box is on.
- **No Signal on TV:** Verify the HDMI cable is correctly connected to both the TV box and the TV. Ensure your TV is set to the correct HDMI input source.
- **Remote Not Responding:** Check the batteries in the remote control. Re-attempt Bluetooth pairing as described in Section 4.2.
- **No Internet Connection:** For Wi-Fi, ensure the correct password is entered and the signal is strong. For Ethernet, check the cable connection to the router and the TV box. Restart your router if necessary.
- **App Issues/Freezing:** Close and reopen the application. If the issue persists, try clearing the app's cache (Settings > Apps > [App Name] > Clear Cache). Restart the TV box if needed.

8.2 Support FAQs

- **For TV Box / TV Stick Issues:** If you encounter any operational or usage issues that cannot be resolved, please contact BOXPUT Official Support and provide your device's MAC address. Our technical team will assist you within 24 hours to help resolve the problem.
- **For Remote Issues:** If you encounter any operational or usage issues that cannot be resolved, please contact BOXPUT Official Support. Our technical team will assist you within 24 hours to help resolve the problem.

9. MAINTENANCE

To ensure the longevity and optimal performance of your BOXPUT Lemon TV L1, follow these maintenance guidelines:

- Keep the device in a cool, dry place away from direct sunlight, heat sources, and moisture.
- Avoid blocking the ventilation holes on the device to prevent overheating.
- Clean the device and remote control regularly with a soft, dry cloth. Do not use liquid cleaners or aerosols.
- Do not attempt to open or repair the device yourself, as this will void the warranty.
- Unplug the device during lightning storms or when unused for long periods.



10. WARRANTY AND SUPPORT

Your BOXPUT Lemon TV L1 Smart Streaming TV Box comes with a manufacturer's warranty. For specific warranty terms and conditions, please refer to the documentation included with your purchase or contact BOXPUT Official Support.

If you require further assistance or have any questions not covered in this manual, please contact BOXPUT Official Support. Our technical team is available to provide solutions and support.

Contact Information: Refer to your product packaging or the official BOXPUT website for the most current support contact details.

Related Documents - Lemon L1

	<p>BOXPUT BPR1S Plus 2.4G RF Remote - Product Overview and Safety Information</p> <p>Official product overview for the BOXPUT BPR1S Plus 2.4G RF remote, detailing its features, manufacturer, European representative, and essential safety warnings. Includes SKU 10500023.</p>
	<p>BOXPUT Q5 PLUS Android TV Box - 4K HD, Android 11, Amlogic S905W2, 2GB/16GB</p> <p>The BOXPUT Q5 PLUS Android TV Box offers Android 11.0, 4K HD streaming, and powerful performance with an Amlogic S905W2 Quad-Core processor, 2GB RAM, and 16GB ROM. Features dual-band WiFi, Bluetooth 5.2, and Ethernet connectivity. Includes manufacturer and distributor details.</p>
	<p>Lemon LM0080/LM0081 DSMX/DSM2 Compatible Receivers: Instructions and Setup</p> <p>Comprehensive instructions for setting up and using Lemon LM0080 (6-channel) and LM0081 (7-channel) DSMX/DSM2 compatible receivers. Covers description, connections, powering, binding, and failsafe settings.</p>
	<p>Tesla Owner's Rights: Navigating State Lemon Laws and Consumer Protection</p> <p>Detailed guide for Tesla owners on their rights under various state 'Lemon Laws.' Learn about defect notification, repair procedures, arbitration, and contact information for Tesla Motors.</p>
	<p>Lifely Agrumino Lemon: Guida alla Programmazione di Base</p> <p>Guida completa per l'installazione, configurazione e programmazione del Lifely Agrumino Lemon con Arduino IDE. Include tutorial, dettagli hardware e FAQ.</p>
	<p>Lemon MB1 User Manual: Features, Safety, and Operation Guide</p> <p>Explore the comprehensive user manual for the Lemon MB1 mobile phone. This guide covers essential safety precautions, getting started instructions, basic and advanced phone functions, multimedia features, and network services for optimal device usage.</p>