

[manuals.plus](#) /

› [TOWODE](#) /

› [TOWODE Smart Alarm System User Manual](#)

TOWODE P152,D152,S10,SPEAK21,9V1A

TOWODE Smart Alarm System User Manual

Model: P152, D152, S10, SPEAK21, 9V1A

1. INTRODUCTION

Thank you for choosing the TOWODE Smart Alarm System. This system is designed to provide reliable home security with its 120dB WiFi siren, window/door sensors, and remote control. It integrates seamlessly with the Tuya app for smart control and instant notifications. Please read this manual carefully before installation and operation to ensure proper use and maximum security.

2. PACKAGE CONTENTS

Verify that all components listed below are included in your package:

- 1 x Siren (Main Hub)
- 1 x Window/Door Sensor
- 1 x Remote Control
- 1 x Charger (AC Power Adapter)
- Adhesive Pads and Screws for installation



Image: All components of the TOWODE Smart Alarm System.

3. SETUP AND INSTALLATION

Follow these steps to set up your TOWODE Smart Alarm System:

3.1. Powering the Siren Hub

1. Connect the provided charger to the siren hub's power input.
2. Plug the charger into a standard AC power outlet. The siren will power on.

Only support 2.4G WIFI

Tuya smart APP

No need GSM card

Weatherproof Design



No need extra fee

Waterproof cover

120db

Siren

Adjusting screw

Antenna

Setup Buttons

Screw hole

The WiFi speaker provides real-time notifications and log viewing, seamlessly integrating with Tuya, Alexa, Google Home, and Google Assistant for interconnected features.

Note: App notifications are free, while phone and SMS notifications may incur extra charges from the service provider.

Image: Detailed view of the siren's power connection and features.

3.2. App Download and WiFi Connection

1. Download the Tuya Smart app from your smartphone's app store (iOS or Android).
2. Register or log in to your Tuya Smart account.
3. Ensure your phone's Bluetooth is enabled. The app will automatically search for nearby devices.
4. In the app, select "Add Device" and follow the on-screen prompts to connect the siren to your 2.4GHz WiFi network.
5. Confirm the connection in the app.

Your browser does not support the video tag.


Video: Step-by-step guide on how to install and connect the WiFi Alarm Home Security System to the Tuya app.

Image: Visual guide for configuring network connection via the Tuya Smart app.

3.3. Installing Door/Window Sensor

1. Identify a suitable location for the sensor on a door or window frame. The two parts of the sensor must be aligned and within 1 cm of each other when the door/window is closed.

2. Clean the surface thoroughly.
3. Attach the main sensor unit and the magnetic strip unit using the provided adhesive pads or screws.
4. In the Tuya app, navigate to 'Accessories' and add the door/window sensor. Trigger the sensor (open/close the door/window) to pair it with the siren.

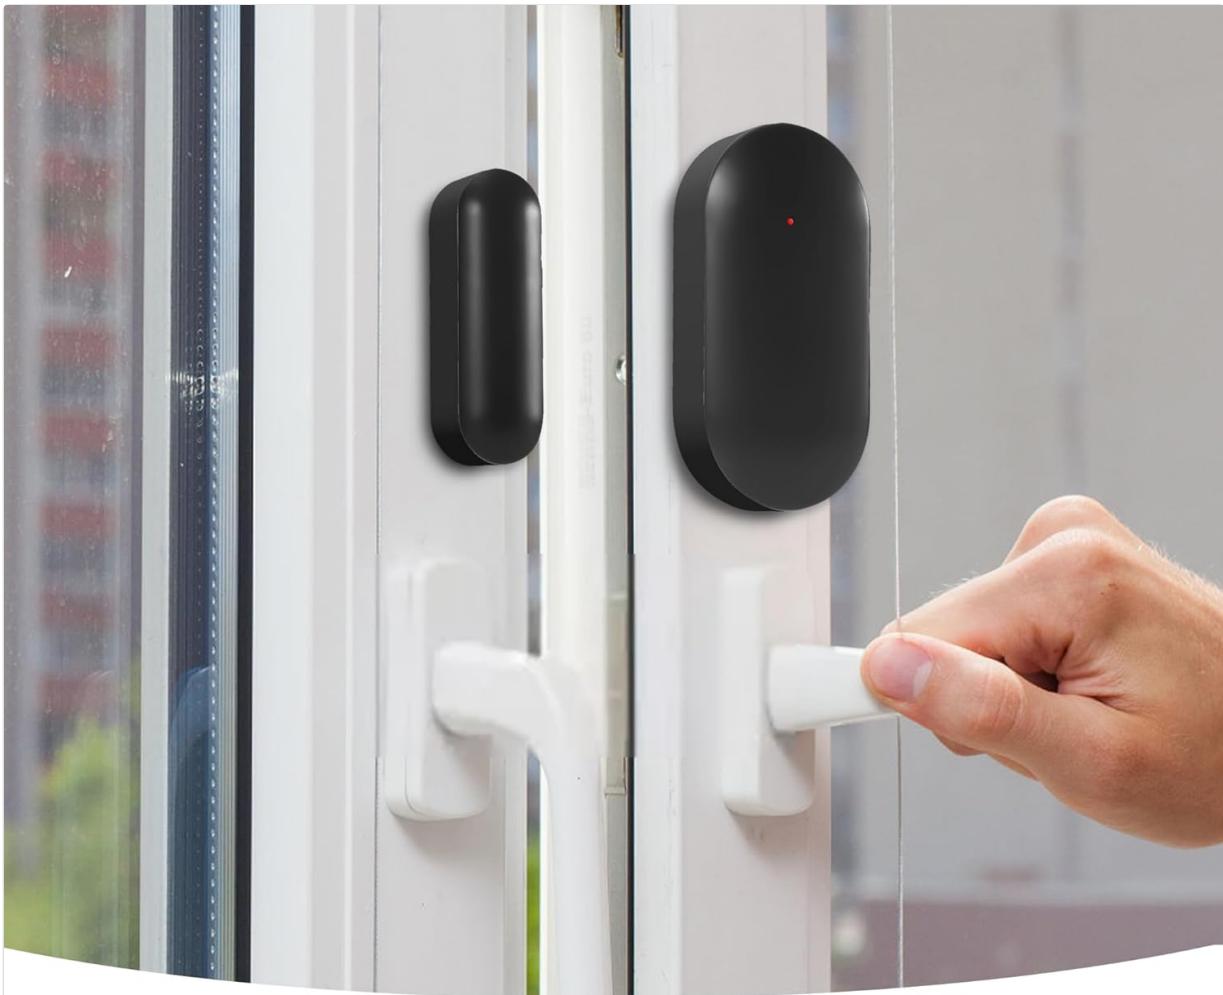

Super Loud Alarm Horn Siren

If the door is opened
the horn siren will sound the alarm

Image: The door/window sensor installed on a door frame.

3.4. Pairing Remote Control

1. In the Tuya app, go to 'Accessories' and select to add a remote control.
2. Press any button on the remote control to pair it with the siren.

300ft Range Control

Control the door alarm with remote control from far away



Arm



Disarm



SOS



Ringtone

Image: The remote control with its various functions.

4. OPERATING THE SYSTEM

The TOWODE Smart Alarm System offers flexible control options:

4.1. Arming and Disarming

- **Via Tuya App:** Use the app to arm (Away Arm, Home Arm) or disarm the system. You can also set schedules for automatic arming/disarming.
- **Via Remote Control:** Press the 'Arm' button to arm the system, and the 'Disarm' button to disarm.

Arm or disarm control by phone.

Arming and disarming can be set according to your needs. Working hours can be set in advance

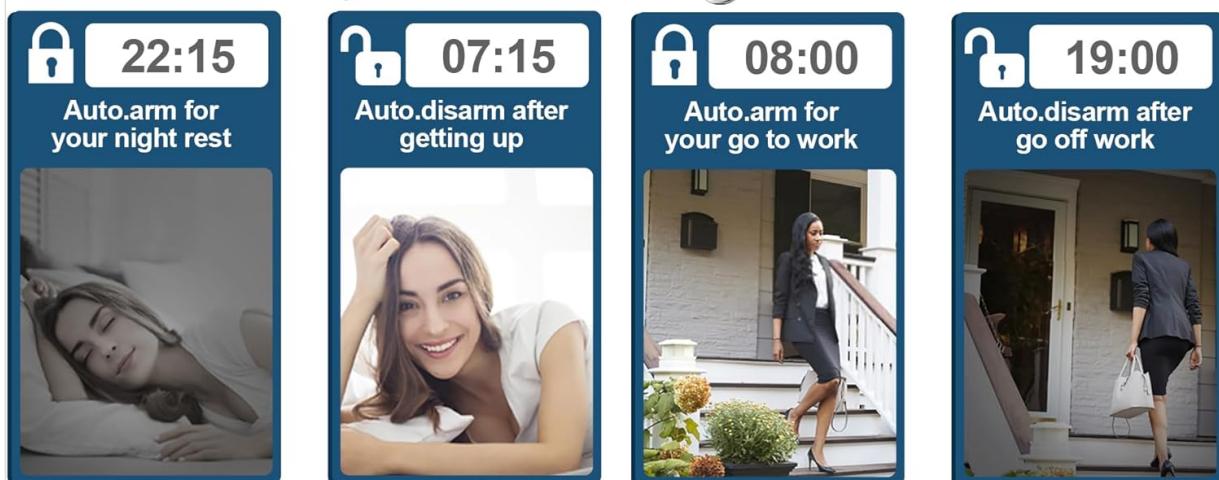


Image: Automatic arming and disarming schedules configurable via the app.

4.2. Alarm Notifications

When a sensor is triggered while the system is armed, the 120dB siren will sound, and you will receive instant notifications on your smartphone via the Tuya app. You can monitor the real-time status of each sensor.

Real Time Message Notifications

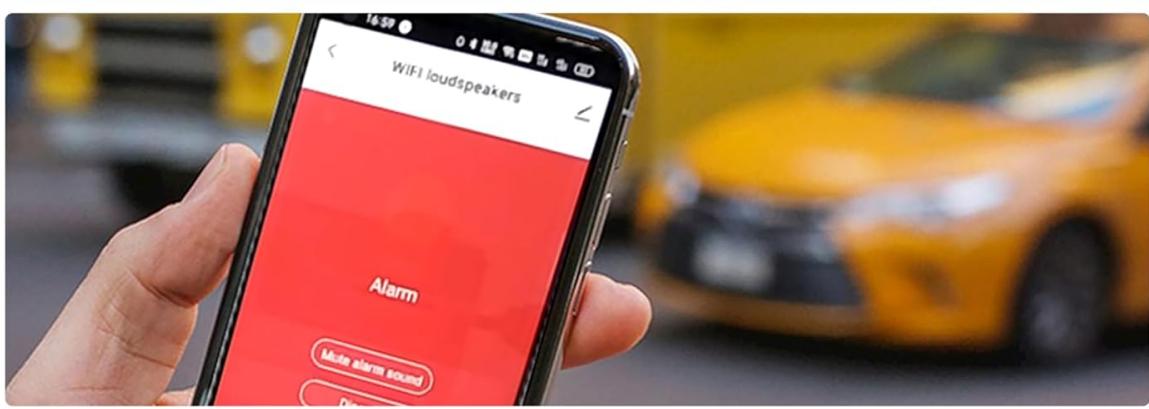


Image: Real-time message notifications upon alarm trigger.

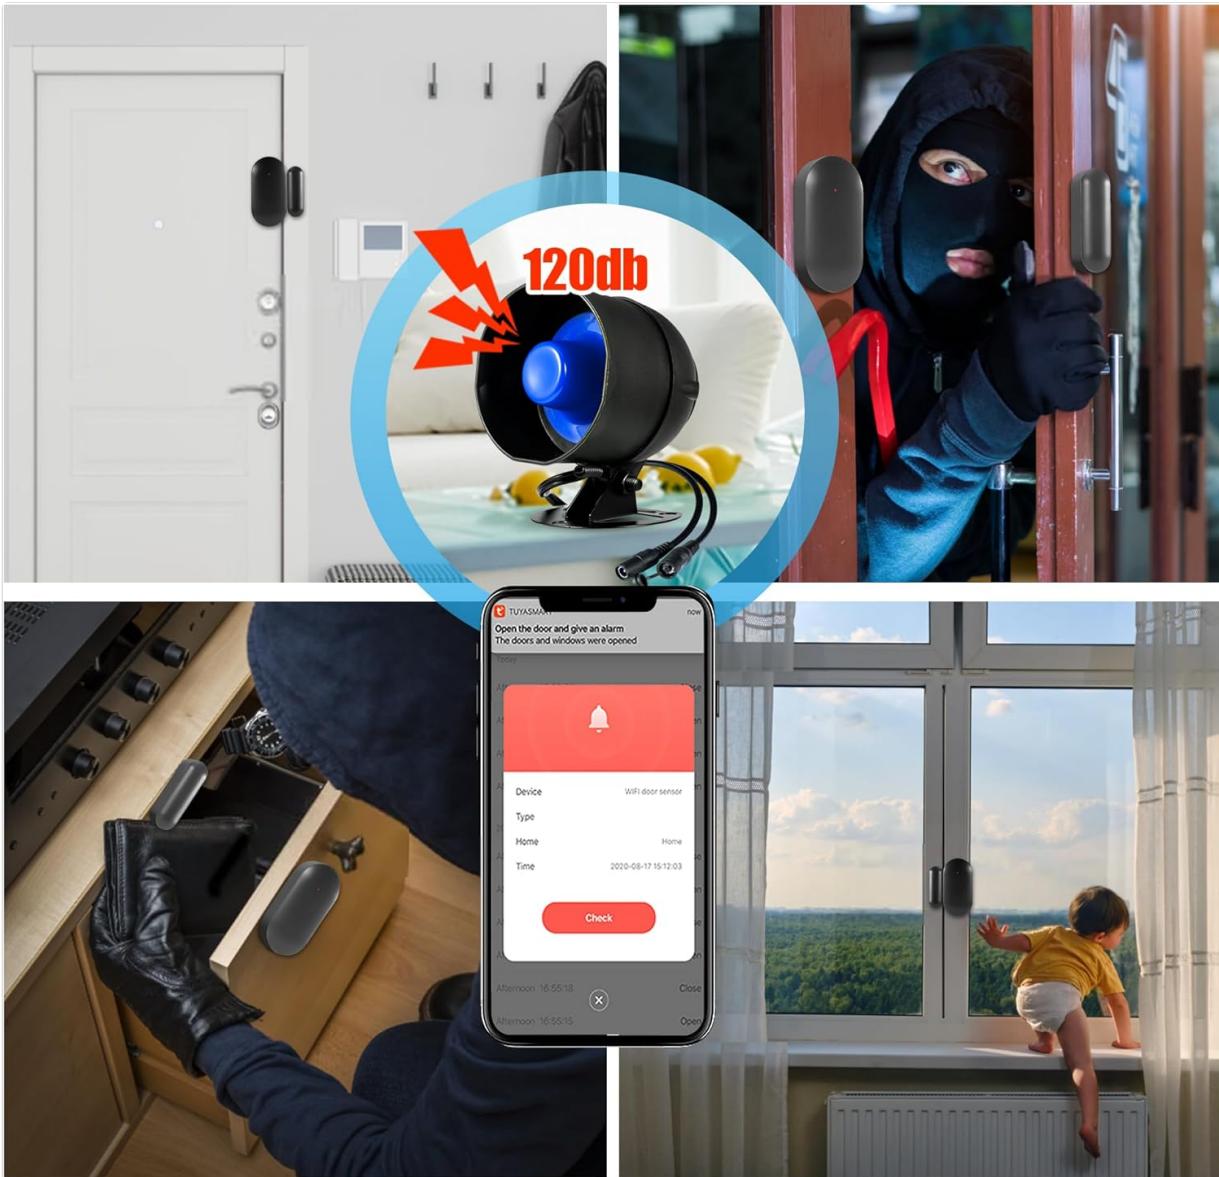


Image: The super loud alarm horn siren activates when a door or window is opened.

4.3. Customizing Alarm Settings

The Tuya app allows for extensive customization:

- Adjust arming/disarming delays.
- Set alarm duration.
- Configure alarm sound (on/off).
- Manage additional detectors (up to 30) and remote controls (up to 20).

Your browser does not support the video tag.

Video: Demonstrates how to set a timer for alarm mute and other settings within the Tuya app.

WiFi speaker



Supports only 2.4G network

Receives real-time information remotely

View records via the app

Seamlessly integrates with Alexa, Google Home

120 decibels

Compatible with 30 detectors

Compatible with 20 remote controllers

Coverage range: 300 feet

Non-WiFi Speaker System



No need for WiFi or Bluetooth

No additional fees required

No need for an app

Ready to use out of the box

Sound level: 115 decibels

Compatible with up to 40 detectors

Compatible with 10 remote controllers

Compatible with 10 doorbells

Image: Comparison of features between WiFi and non-WiFi alarm systems.

5. MAINTENANCE

To ensure optimal performance and longevity of your alarm system:

- Regularly check the battery status of the door/window sensor via the Tuya app. Replace batteries as needed.
- Keep the siren and sensors clean and free from dust. Use a soft, dry cloth for cleaning.
- Avoid exposing the devices to extreme temperatures or direct water contact.
- Test the alarm system periodically (e.g., monthly) to ensure all components are functioning correctly.

6. TROUBLESHOOTING

Problem	Possible Cause	Solution
Siren not connecting to WiFi	Incorrect WiFi password; 5GHz network; weak signal.	Ensure 2.4GHz WiFi, re-enter password, move closer to router.

Problem	Possible Cause	Solution
Sensor not triggering alarm	Sensor not paired; low battery; incorrect installation.	Re-pair sensor in app, replace battery, check alignment.
No app notifications	App permissions; network issues; app not running in background.	Check app notification settings, ensure stable internet, allow background activity.
Remote control not working	Not paired; low battery.	Re-pair remote, replace battery.

7. SPECIFICATIONS

- **Brand:** TOWODE
- **Model Numbers:** P152, D152, S10, SPEAK21, 9V1A
- **Color:** Black and Blue
- **Power Source:** AC
- **Compatible Devices:** Smartphone (Tuya App)
- **Connectivity Technology:** Wireless (2.4GHz WiFi)
- **Installation Type:** Self-Adhesive, Screw-In
- **Alert Type:** Motion (with compatible sensors)
- **Item Weight:** 1.1 Pounds
- **Control Method:** Remote, App
- **Recommended Uses:** Home Security (Garage, Shed, Apartment, etc.)
- **Included Components:** 1*Door and window alarm, 1*Siren, 1*Remote Control, 1*Charger
- **Noise Level:** 120 dB
- **Max Detectors Supported:** 30 wireless detectors
- **Max Remote Controls Supported:** 20 remote controls
- **Product Dimensions:** 9.06 x 5.24 x 4.84 inches



Image: Dimensions of the main components.

8. WARRANTY INFORMATION

TOWODE products are manufactured to the highest quality standards. This product comes with a standard manufacturer's warranty against defects in materials and workmanship. Please refer to your purchase documentation for specific warranty terms and duration. Keep your proof of purchase for warranty claims.


9. CUSTOMER SUPPORT

For technical assistance, troubleshooting, or warranty inquiries, please contact TOWODE customer support through the following channels:

- **Email:** support@towode.com (example email, replace with actual if available)
- **Website:** [Visit the TOWODE Store on Amazon](#)

Please have your product model number and purchase date ready when contacting support.

Related Documents - P152,D152,S10,SPEAK21,9V1A

	<p><u>TOWODE Water Detector User Manual: Operation and Battery Replacement Guide</u></p> <p>Comprehensive user manual for the TOWODE Water Detector, detailing product features, specifications, battery replacement steps, and warranty information. Learn how to effectively use and maintain your leak detection device.</p>
	<p><u>TOWODE Fingerprint Padlock: Setup, Usage, and Warranty Guide</u></p> <p>Comprehensive guide for the TOWODE fingerprint padlock, covering fingerprint setup, deletion, charging, low power alerts, warranty information, and customer support.</p>
	<p><u>Mini Wi-Fi & Zigbee Gate Opener Module User Manual</u></p> <p>Comprehensive user manual for the Mini Wi-Fi (QS-WIFI-S10-C03) and Zigbee (QS-Zigbee-S10-C03) Gate Opener Modules. Covers technical specifications, installation, manual override, app setup, FAQ, and system requirements for smart home automation.</p>
	<p><u>Shed Assembly Guide: Part List and Assembly Instructions</u></p> <p>A comprehensive guide detailing the parts list and assembly instructions for a shed, including step-by-step guidance for constructing the outer base, side walls, door support, roof panels, eaves, and hinges.</p>
	<p><u>Instruction Manual: Zigbee and WiFi Smart Curtain Modules</u></p> <p>Comprehensive guide for installing and operating Zigbee and WiFi smart curtain modules. Includes technical specifications, wiring diagrams, manual override instructions, FAQs, and app control setup using Tuya Smart App, compatible with Alexa and Google Assistant.</p>
	<p><u>APEC Water Systems Warranty Information and Product Coverage</u></p> <p>Detailed warranty information for APEC Water Systems' residential reverse osmosis, whole house, and total solution water filtration products. Covers warranty periods, general conditions, exclusions, and non-APEC product policies.</p>

Documents - TOWODE – P152,D152,S10,SPEAK21,9V1A

no relevant documents