



[Manuals.plus](#) /

> [HOPGGIE](#) /

> HOPGGIE 11.8" Mini Crystal LED Flush Mount Chandelier (Model HJ-016)

HOPGGIE HJ-016

HOPGGIE 11.8" Mini Crystal LED Flush Mount Chandelier Instruction Manual

Model: HJ-016

1. INTRODUCTION

This manual provides comprehensive instructions for the safe installation, operation, and maintenance of your HOPGGIE 11.8" Mini Crystal LED Flush Mount Chandelier, Model HJ-016. Please read this manual thoroughly before installation and retain it for future reference.

2. SAFETY INFORMATION

WARNING: To avoid electric shock, always disconnect power at the circuit breaker before installation or servicing.


- Ensure all electrical connections comply with local codes and ordinances, as well as the National Electric Code (NEC).
- If you are unfamiliar with electrical wiring, consult a qualified electrician.
- Wear gloves during installation to protect hands from sharp edges and to prevent fingerprints on crystal components.
- This fixture is designed for indoor use only. Do not expose to moisture.
- Ensure the mounting surface can support the weight of the fixture.

3. PACKAGE CONTENTS

Verify that all components are present and undamaged before beginning installation.

- 1x HOPGGIE 11.8" Mini Crystal LED Flush Mount Chandelier (Model HJ-016)
- 1x Mounting Hardware Bag (includes screws, wire nuts, etc.)
- 1x Instruction Manual

Turn Off

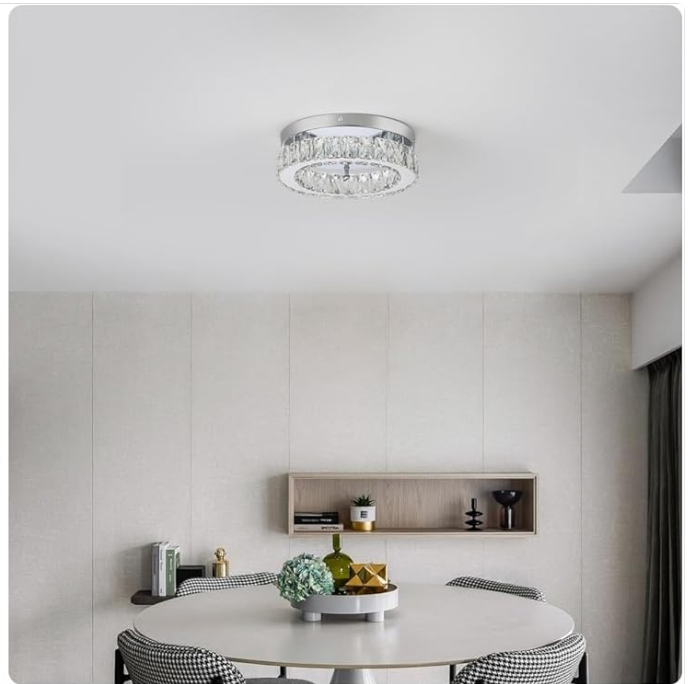

Turn On



Figure 3.1: Illustration of the chandelier with key dimensions and components. The image shows the 11.8-inch diameter, 3.9-inch height, and the crystal and stainless steel construction.

4. PRODUCT SPECIFICATIONS

Feature	Specification
Brand	HOPGGIE
Model Name	HJ-016
Product Dimensions	11.8"L x 11.8"W x 4"H (30cm L x 30cm W x 10cm H)
Material	Crystal, Stainless Steel
Light Source Type	Built-in LED Chips

Feature	Specification
Wattage	18 Watts
Voltage	85V to 265V (Compatible with 110V)
Color Temperature	Cool White (5000 Kelvin)
Brightness	Approximately 1665 lumens (based on 85 lumens/watt efficiency)
Installation Type	Flush Mount
Indoor/Outdoor Usage	Indoor
Assembly Required	No (fully assembled)

5. SETUP AND INSTALLATION

The HOPGGIE Mini Crystal LED Flush Mount Chandelier comes fully assembled. Follow these steps for safe installation:

- Turn Off Power:** Before starting, ensure the power supply to the installation area is completely turned off at the circuit breaker.
- Prepare Mounting Surface:** Ensure the electrical box and mounting surface are clean, dry, and structurally sound to support the fixture's weight.
- Attach Mounting Bracket:** Secure the mounting bracket (included in the hardware bag) to the electrical junction box using the provided screws. Ensure the bracket is firmly attached.
- Wire Connections:**
 - Connect the **black** wire from the fixture to the **black** (Live) wire from the electrical box using a wire nut.
 - Connect the **white** wire from the fixture to the **white** (Neutral) wire from the electrical box using a wire nut.
 - Connect the **green** or **bare copper** (Ground) wire from the fixture to the **green** or **bare copper** (Ground) wire from the electrical box, and to the ground screw on the mounting bracket.
 - Ensure all connections are secure and no bare wire is exposed.

Note: Wire colors may vary by region. If unsure, consult a qualified electrician.

- Mount the Fixture:** Carefully align the fixture with the mounting bracket and secure it using the provided screws. Ensure the fixture is flush against the ceiling.
- Restore Power:** Once the fixture is securely mounted and all connections are checked, restore power at the circuit breaker.



Figure 5.1: The HOPGGIE Mini Crystal LED Flush Mount Chandelier installed on a ceiling, showcasing its compact design and crystal elements.



Figure 5.2: A detailed view of the chandelier's crystal and chrome stainless steel construction, highlighting the quality of materials.

6. OPERATION

The HOPGGIE Mini Crystal LED Flush Mount Chandelier operates via a standard wall switch (not included). The integrated LED chips provide consistent cool white illumination.

- **Turning On/Off:** Use your existing wall switch to turn the light fixture on or off.
- **Light Output:** The fixture provides 18 watts of cool white LED light, suitable for various indoor spaces.



Parameters

- Material: crystal and stainless steel
- Wattage: 18 watts
- Voltage: 110 volts
- Light Source: built-in LED chips

Figure 6.1: Comparison showing the chandelier in both off and on states, demonstrating the light output and ceiling pattern when illuminated.

Your browser does not support the video tag.

Video 6.1: An official product video from HOPGGIE demonstrating the illumination and aesthetic appeal of the 11.8" LED Chandelier Ceiling Light when active.

Your browser does not support the video tag.

Video 6.2: An official product video from HOPGGIE showcasing the 11.8" Mini Chandelier, highlighting its design and light distribution.

7. MAINTENANCE

Regular maintenance will help preserve the appearance and functionality of your chandelier.

- **Cleaning:**
 - Ensure the power is off before cleaning.

- Wipe the metal parts with a soft, dry cloth.
 - For crystals, use a soft, lint-free cloth dampened with a mild glass cleaner or distilled water. Avoid abrasive cleaners.
 - Do not spray cleaner directly onto the fixture.
- **Bulb Replacement:** This fixture uses integrated LED chips and does not require bulb replacement. The LEDs are designed for a long service life.

8. TROUBLESHOOTING

If you experience issues with your chandelier, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	<ul style="list-style-type: none"> ◦ Power is off at the circuit breaker. ◦ Loose wire connections. ◦ Faulty wall switch. 	<ul style="list-style-type: none"> ◦ Check the circuit breaker and ensure power is on. ◦ Turn off power, check all wire connections for security. ◦ Test the wall switch with another device or consult an electrician.
Light flickers.	<ul style="list-style-type: none"> ◦ Loose wire connections. ◦ Incompatible dimmer switch (if applicable). 	<ul style="list-style-type: none"> ◦ Turn off power, check all wire connections. ◦ Ensure any dimmer switch used is compatible with LED fixtures. This model is not explicitly stated as dimmable, so a standard switch is recommended.
Crystals appear dull.	Dust or residue buildup.	Clean crystals as per maintenance instructions.

If problems persist after attempting these solutions, please contact customer support.

9. WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the contact details provided with your purchase documentation or visit the official HOPGGIE website. Keep your purchase receipt as proof of purchase.

10. DISPOSAL

This product contains electronic components and should not be disposed of with general household waste. Please dispose of it according to local regulations for electronic waste recycling.



