



[Manuals.plus](#) /

› [HOPGGIE](#) /

› HOPGGIE 18" Crystal Chandelier (Model HJ-017) User Manual

## HOPGGIE HJ-017

# HOPGGIE 18" Crystal Chandelier (Model HJ-017) User Manual

Model: HJ-017 | Brand: HOPGGIE

## 1. INTRODUCTION

---

Thank you for choosing the HOPGGIE 18" Crystal Chandelier. This elegant 2-layer flush mount LED light fixture is designed to enhance the ambiance of various rooms, including living rooms, dining rooms, and bedrooms. This manual provides essential information for safe installation, operation, and maintenance of your new chandelier.



*Image 1.1: The HOPGGIE 18" Crystal Chandelier, showcasing its two tiers of crystals and polished chrome finish.*

## 2. SAFETY INFORMATION

---

Please read all safety instructions carefully before installation and use. Failure to follow these instructions may result in electric shock, fire, or other hazards.

- **Electrical Safety:** Always turn off the power at the main circuit breaker before beginning any electrical work. Ensure the wiring is performed by a qualified electrician if you are unsure.
- **Voltage:** This fixture is designed for 110 Volts. Do not connect to a different voltage supply.
- **Handling:** The chandelier contains crystal components. Handle with care to prevent breakage or injury. Wear gloves during installation to protect hands from sharp edges and prevent fingerprints on the chrome finish.
- **Mounting:** Ensure the mounting surface can support the weight of the fixture (approximately 13.84 pounds).
- **Indoor Use Only:** This product is intended for indoor use in dry locations. Do not expose to moisture.

### 3. PACKAGE CONTENTS

---

Verify that all components are present and undamaged before proceeding with installation. If any parts are missing or damaged, contact customer support.

- 1 x HOPGGIE 18" Crystal Chandelier (Model HJ-017)
- 1 x Mounting Hardware Kit (screws, wire nuts, mounting bracket)
- 1 x Instruction Manual

### 4. PRODUCT OVERVIEW AND SPECIFICATIONS

---

#### 4.1 Product Features

- **2-Tier Crystal Design:** Features two layers of K9 crystals for enhanced light reflection and aesthetic appeal.
- **Integrated LED:** Built-in LED chips provide efficient and bright illumination (Cool White light color).
- **Durable Construction:** Polished chrome stainless steel frame ensures longevity and a modern finish.
- **Wide Application:** Suitable for various indoor spaces such as living rooms, dining rooms, bedrooms, hallways, and foyers.
- **Easy Installation:** Designed for quick and straightforward flush mount installation.

## CHANDELIER

### DETAILS

### BEAUTIFUL

### CRYSTAL

### BOTTOM


### DESIGN

### GIVES

### YOU

### MORE

### LIGHT

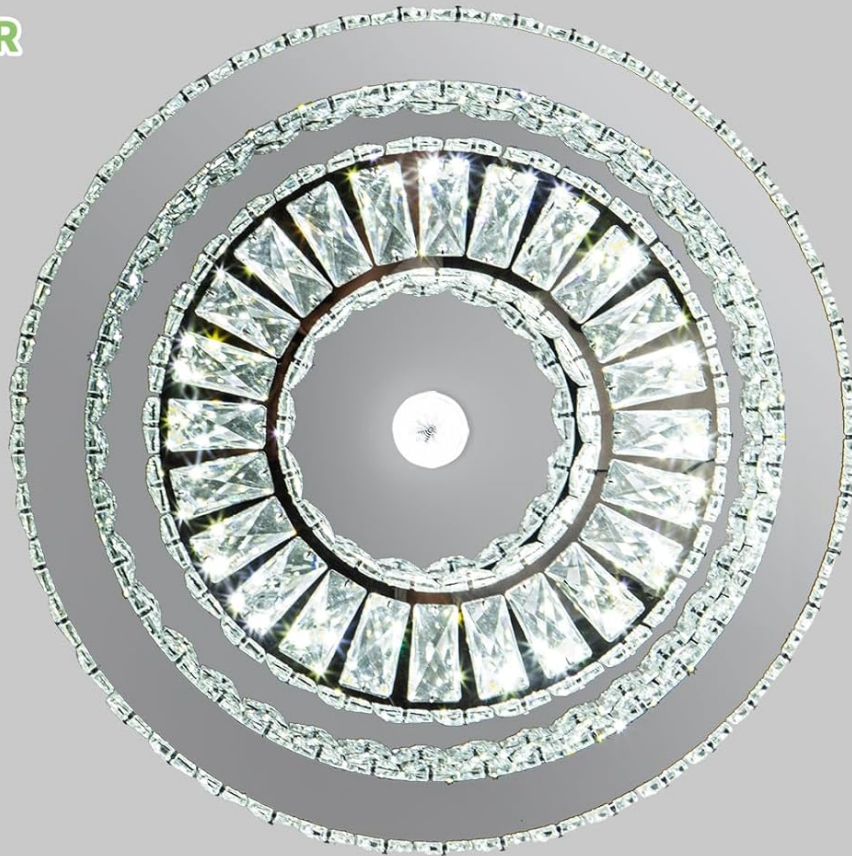

**Chrome Stainless Steel**



**K9 Crystal**



**LED Light Source**

*Image 4.1: Detailed view of the chandelier's components, highlighting the chrome stainless steel, K9 crystal, and integrated LED light source.*

## 4.2 Technical Specifications

Specification	Detail
Model Name	HJ-017
Brand	HOPGGIE
Dimensions (L x W x H)	18" x 18" x 5" (46cm x 46cm x 12.7cm)
Ceiling Canopy Diameter	17.7" (45cm)

Specification	Detail
Material	Crystal, Stainless Steel
Light Source Type	Integrated LED
Light Color	Cool White
Wattage	56 Watts
Voltage	110 Volts
Brightness	800 Lumens (Note: Feature bullets mention 5000-10000 lumens, but specifications list 800 lumens. Please refer to product packaging for the most accurate lumen output.)
Item Weight	13.84 pounds
Installation Type	Semi Flush Mount
Control Method	App (Smart Switch)



# Parameters

- Material: crystal and stainless steel
- Wattage: 56 watts
- Voltage: 110 volts
- Light Source: built-in LED chips
- Item Weight: 13.62 pounds

Image 4.2: Dimensional diagram of the chandelier, indicating its 18-inch diameter and 5.5-inch height.

## 5. INSTALLATION INSTRUCTIONS

**Important:** Before starting installation, ensure the power supply is turned off at the circuit breaker. It is recommended to have two people for installation due to the fixture's weight and size. If you are not comfortable with electrical wiring, consult a qualified electrician.

1. **Prepare the Area:** Turn off power at the main circuit breaker. Clear the installation area and ensure you have a stable ladder.
2. **Unpack and Inspect:** Carefully remove the chandelier from its packaging. Inspect all components for any damage.
3. **Install Mounting Bracket:** Attach the mounting bracket to the junction box in the ceiling using the provided screws. Ensure the bracket is securely fastened and can support the fixture's weight.
4. **Wire Connections:**
  - Carefully lift the chandelier close to the ceiling. It is highly recommended to have a second person hold the

fixture during wiring.

- Connect the fixture's wires to the corresponding wires from the ceiling junction box using wire nuts. Typically, connect the black wire from the fixture to the black (live) wire from the ceiling, the white wire from the fixture to the white (neutral) wire from the ceiling, and the ground wire to the ground wire. If wire colors differ, consult an electrician.
- Ensure all connections are secure and insulated.

5. **Mount the Fixture:** Carefully align the chandelier with the mounting bracket and secure it to the ceiling using the provided screws. Ensure the fixture is flush against the ceiling and stable.
6. **Restore Power:** Once the installation is complete and all connections are secure, turn the power back on at the circuit breaker.
7. **Test Functionality:** Turn on the light switch to ensure the chandelier illuminates correctly.

*Note: Some user reviews indicate that the wiring might be short and the mounting holes may not perfectly align with standard junction boxes. Patience and potentially a helper are advised during installation.*

## 6. OPERATING INSTRUCTIONS

---

The HOPGGIE Crystal Chandelier is designed for simple operation.

- **Power On/Off:** Use your standard wall switch to turn the chandelier on or off.
- **Smart Control (if applicable):** This model supports control via an app (Smart Switch). Refer to the specific instructions provided with the product for pairing the chandelier with your smart device and using the app for advanced features like dimming or scheduling, if available for your specific model.

## Turn Off



## Turn On



Image 6.1: Visual representation of the chandelier when turned off and on, demonstrating its illumination.

## 7. MAINTENANCE

---

Regular maintenance will help preserve the beauty and functionality of your chandelier.

- **Cleaning:**

- Ensure the power is off before cleaning.
- For the chrome finish, wipe gently with a soft, dry, lint-free cloth. Do not use abrasive cleaners or harsh chemicals, as they may damage the finish.
- For the crystal components, use a soft, damp cloth with a mild glass cleaner. Avoid spraying cleaner directly onto the fixture; instead, spray onto the cloth.

- **Inspection:** Periodically check all connections and mounting hardware to ensure they remain secure.

- **LEDs:** The LED chips are integrated and not user-replaceable. If the LEDs fail, contact customer support.

## 8. TROUBLESHOOTING

---

If you encounter issues with your chandelier, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	No power supply; loose wiring; faulty switch.	Check circuit breaker. Ensure all wire connections are secure. Test the wall switch.
Light flickers.	Loose wiring; incompatible dimmer switch (if applicable).	Check wire connections. Ensure any dimmer switch used is compatible with LED fixtures.
Remote control not working (if applicable).	Batteries dead; remote not paired; interference.	Replace remote batteries. Refer to specific remote pairing instructions (if provided). Ensure no obstructions.
Chandelier appears unstable.	Mounting bracket not secure; fixture not properly attached.	Turn off power. Re-check mounting bracket and fixture attachment screws. Tighten as necessary.

If the problem persists after attempting these solutions, please contact HOPGGIE customer support.

## 9. WARRANTY AND SUPPORT

---

For warranty information or technical support, please contact HOPGGIE customer service through the retailer where the product was purchased or visit the official HOPGGIE store page on Amazon: [HOPGGIE Store](#).

Please have your model number (HJ-017) and purchase date available when contacting support.

