

SENCKIT wifi siren alarm-1

SENCKIT Smart Wi-Fi Siren Alarm

USER MANUAL

Model: wifi siren alarm-1

Product Overview

The SENCKIT Smart Wi-Fi Siren Alarm is a wireless strobe siren designed to enhance your home security system. It integrates seamlessly with Tuya Smart Life devices, providing both audible and visual alerts when triggered. This device features a loud 100dB sounder and dazzling red light for effective deterrence and notification.

Key Features:

- **Tuya Smart Device Integration:** Links with existing Tuya Smart Life devices such as door/window sensors, motion detectors, and water detectors to form a comprehensive security system.
- **App Remote Control:** Control and monitor the siren remotely via the Tuya Smart or Smart Life APP. Features include time scheduling, automatic push notifications, and sharing capabilities.
- **Selectable Tones:** Offers 18 pre-installed alarm tones, allowing users to choose their preferred sound.
- **Dual Power Supply:** Operates primarily via Mini USB (5V-1A) and includes a backup option for 2 * CR123A batteries (not included) for emergency power.
- **Easy Installation:** Simple plug-and-play setup with options for wall mounting.

Setup Guide

Package Contents

Before you begin, ensure all items are present in the package:

- 1 * Siren Alarm
- 1 * Pack of Screws
- 1 * User Manual (this document)

- 1 * USB Line

Powering the Device

The siren alarm requires a continuous power supply via the included USB cable. It also supports backup batteries for uninterrupted operation during power outages.

1. Connect the provided USB cable to the Mini USB port on the siren alarm.
2. Plug the other end of the USB cable into a standard 5V-1A USB power adapter (not included) and then into an electrical outlet.
3. For backup power, insert two CR123A batteries (not included) into the battery compartment. Ensure correct polarity.



Image: The siren alarm connected via Mini-USB and an illustration of battery backup. The device is designed for continuous power via USB, with batteries serving as emergency backup.

Installation

The siren alarm can be easily mounted on a wall or placed on a flat surface.


- **Wall Mounting:** Use the included screws to secure the siren alarm to a desired wall location. Generally, it is recommended to install it in a central location or near entry points like walls or doorways.
- **Surface Placement:** Place the siren alarm on a stable, flat surface where it can effectively emit sound and light.

App Connection (Tuya Smart / Smart Life)

To control the siren alarm remotely and link it with other smart devices, you need to connect it to the Tuya Smart or Smart Life application.

- 1. **Download App:** Download the "Tuya Smart" or "Smart Life" app from your mobile device's app store (available for Android and iOS).
- 2. **Connect Wi-Fi:** Ensure your mobile device is connected to a 2.4GHz Wi-Fi network.*Note: 5GHz Wi-Fi networks are not supported.*
- 3. **Add Device:** Open the app, register or log in, and follow the in-app instructions to add a new device. The siren alarm should enter pairing mode automatically when first powered on. Look for "Siren Alarm" or similar in the device list.
- 4. **Complete Setup:** Follow the prompts in the app to complete the connection process. This typically involves confirming your Wi-Fi network and password.

SPECIFICATIONS

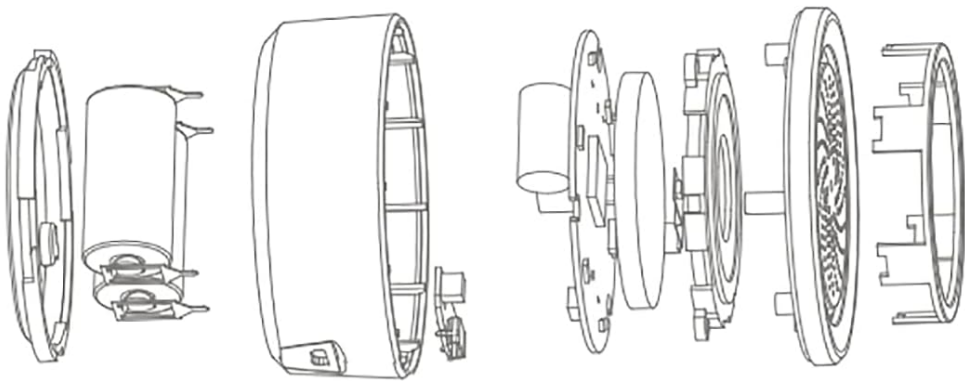

Multiple Sound Selection	
Power supply	Mini USB , 5V 1A
Backup power supply	CR123A x 2 (optional)
Sound intensity	100 dB
Wireless Type	2.4GHz
Protocol	IEEE 802.11b/g/n
Wireless Range	45m
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Operating Humidity	20% ~ 85%
Storage Temperature	0°C ~ 60°C (32°F ~ 140°F)
Storage Humidity	0% ~ 90%
Certificate	RoHS, FCC, CE

Image: Visual representation of the three-step process to connect the device: Connect WiFi, Download App, and Add Devices. Supported platforms include Tuya Smart, Amazon Alexa, Google Assistant, and Tmall Genie.

Operating Instructions

App Remote Control

Once connected to the Tuya Smart or Smart Life app, you can control the siren alarm from anywhere with an internet connection.

- **Arm/Disarm:** Activate or deactivate the siren alarm directly from the app interface.
- **Notifications:** Receive instant push notifications on your phone when the alarm is triggered.
- **Scheduling:** Set schedules for when the alarm should be active or inactive.
- **Sharing:** Share control of the device with family members or trusted individuals through the app's sharing features.



Image: The SENCKIT Smart Wi-Fi Siren Alarm positioned next to a smartphone showing its control interface within the Wi-Fi Alarm app. This illustrates the remote control capability of the device.

Linking with Other Tuya Smart Devices

The siren alarm is designed to work in conjunction with other Tuya-compatible smart devices to create a comprehensive home security system.

- **Scenario Creation:** Within the Tuya Smart or Smart Life app, you can create automation scenarios. For example, set up a rule where if a door/window sensor detects an opening, the siren alarm is triggered.
- **Motion Detection:** If you have a Tuya-compatible motion detector, you can link it to the siren so that the siren activates upon motion detection. *Note: This siren alarm itself does not have motion detection functionality.*
- **Water Leak Detection:** Integrate with water leak sensors to trigger the siren in case of a detected leak.

Super Alarm Dazzling Light

Smart Alarm, Sound alarm at the same time flashing, dazzling red light with alarm, full of power.



Easy installation



Music ring reminder



Ultra-bright Led



Work on day and night

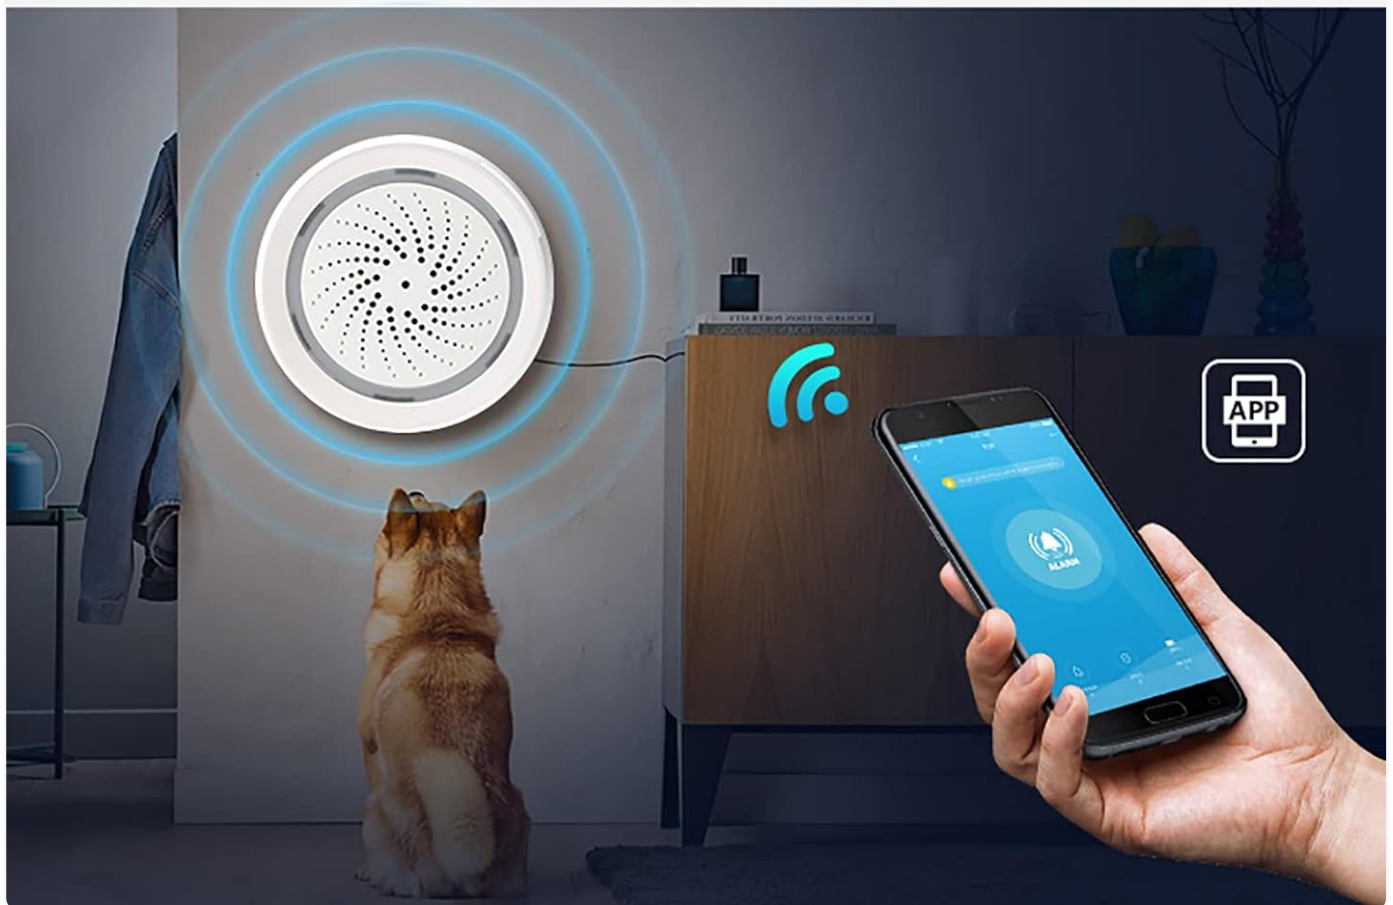


Image: The siren alarm mounted on a wall, emitting light and sound, with a dog looking towards it. A smartphone in the foreground displays the alarm app, highlighting the "Super Alarm Dazzling Light" feature and its integration into a smart home environment.

Sound and Light Alarm

When triggered, the siren alarm produces a loud 100dB sound and a dazzling red light to alert occupants and deter

intruders.



Image: A close-up of the siren alarm with a graphic indicating a 100dB loud alarm. The graphic compares 100dB to other sound levels like jet plane, ball-mill, market, office, talking, and whisper.

Selecting Alarm Tones

The siren offers 18 selectable alarm tones. You can choose your preferred tone through the Tuya Smart or Smart Life app.

1. Open the Tuya Smart or Smart Life app.
2. Navigate to the siren alarm's device settings.
3. Look for an option related to "Alarm Tones" or "Ringtones" and select your desired sound.

8 Alarm Sound

Optional Ringtones Colorful Life

Choose your favorite ring tone according to personal preference Intimate design for your smart life

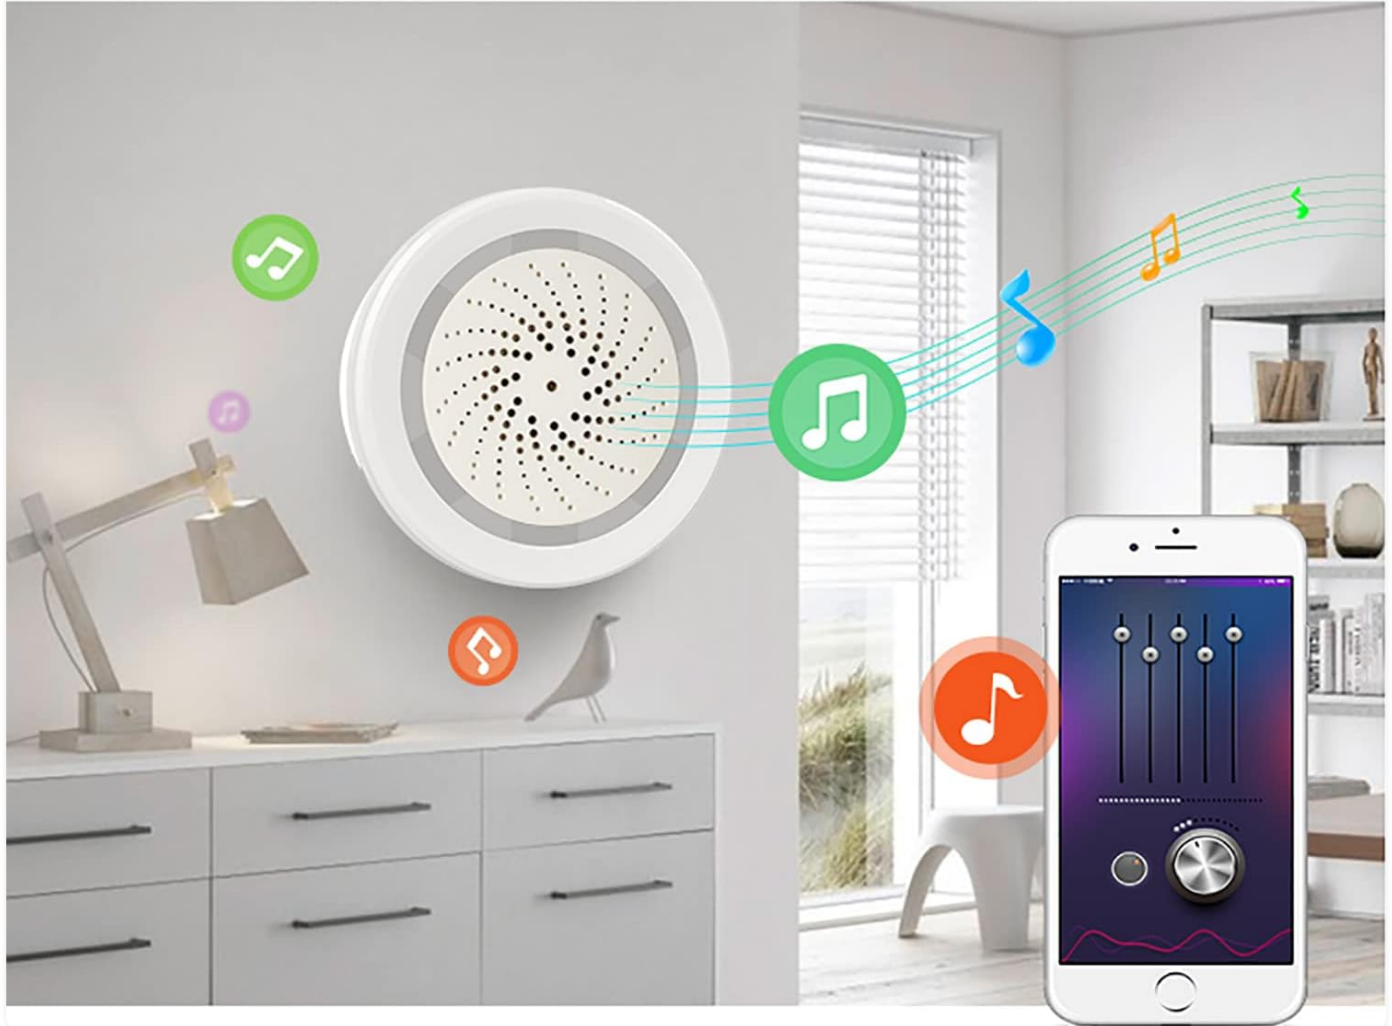


Image: The siren alarm on a wall, surrounded by musical notes, with a smartphone displaying an interface for selecting from 8 alarm sounds or optional ringtones, illustrating the customization feature.

Maintenance

To ensure optimal performance and longevity of your SENCKIT Smart Wi-Fi Siren Alarm, follow these maintenance guidelines:

- **Cleaning:** Wipe the device regularly with a soft, dry cloth. Do not use liquid cleaners or abrasive materials, as they may damage the device.
- **Placement:** Ensure the device is placed in a dry environment, away from direct sunlight, extreme temperatures (0°C~60°C / 32°F~140°F), and high humidity (20%~85% operating humidity).
- **Battery Replacement:** If using backup batteries, replace them periodically (e.g., annually or as needed) to ensure emergency power functionality. The device uses 2 * CR123A batteries.
- **Firmware Updates:** Check the Tuya Smart or Smart Life app periodically for any available firmware updates for the

siren alarm. Keeping the firmware updated can improve performance and add new features.

Troubleshooting

If you encounter issues with your SENCKIT Smart Wi-Fi Siren Alarm, refer to the following common problems and solutions:

Device Not Connecting to Wi-Fi / Not Blinking for Pairing

- **Check Power:** Ensure the device is properly plugged into a working electrical outlet via the USB cable. The device should always be connected to AC power for primary operation.
- **Wi-Fi Band:** Confirm that your Wi-Fi network is 2.4GHz. This device does not support 5GHz Wi-Fi.
- **Network Stability:** Ensure your Wi-Fi signal is strong and stable in the location of the siren.
- **Reset Device:** If the device does not enter pairing mode (indicated by blinking), try resetting it. Refer to the app's instructions or the device's physical button (if any) for reset procedures. Often, unplugging and replugging after a short wait can initiate pairing mode.
- **Router Distance:** Move the siren closer to your Wi-Fi router to rule out range issues.

Siren Sound Level / Quality Issues

- **Expected Loudness:** The siren is rated for 100dB. While this is loud, environmental factors and distance can affect perceived loudness. Ensure the siren is not obstructed.
- **Tone Selection:** Experiment with different alarm tones available in the app, as some may be perceived differently.
- **Power Supply:** Ensure the device has stable power. Low power could potentially affect sound output.

Backup Batteries Not Included / Type Clarification

- **Battery Type:** The siren alarm requires 2 * CR123A batteries for backup power. These are not included in the package and must be purchased separately.
- **Purpose:** Remember that the batteries are for backup only; the device requires continuous USB power for normal operation.

If these steps do not resolve your issue, please contact SENCKIT customer service for further assistance.

Specifications

Feature	Detail
Brand	SENCKIT
Model Number	wifi siren alarm-1
Color	White
Power Supply	Mini USB, 5V-1A
Backup Power Supply	2 * CR123A (Not Included)
Sound Intensity	100 dB
Wireless Type	2.4GHz, 1T1R
Protocol	IEEE 802.11b/g/n
Wireless Range	45m (approx. 147 feet)
Operating Temperature	0°C~60°C (32°F~140°F)
Operating Humidity	20%~85%
Product Dimensions (D*W*H)	68*68*30mm (2.67*2.67*1.18in)
Item Weight	0.1 Kilograms (3.52 ounces)
Control Method	App (Tuya Smart or Smart Life)
Compatible Devices	Home Security System, Tuya Smart Devices

Three-step Connect Easy To Use



CONNECT WIFI



DOWNLOAD APP



ADD DEVICES

SUPPORT PLATFORM



Tuya Smart



Amazon Alexa



Google Assistant



Tmall Genie

Image: An exploded diagram showing the internal components of the siren alarm, accompanied by a detailed list of its technical specifications, including power, sound intensity, wireless type, and environmental conditions.

Warranty and Support

SENCKIT is committed to providing high-quality smart home devices. For any questions regarding your Wireless Home Security Alarm, please contact our customer service. We strive to integrate every feedback to improve our products and meet the needs of our customers.

Please refer to your purchase documentation or the SENCKIT official website for specific warranty terms and contact information.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question