

MIKO MA-04GB

MIKO Air Purifier Instruction Manual

Model: MA-04GB

1. INTRODUCTION

Thank you for choosing the MIKO Air Purifier. This device is engineered to provide a cleaner, healthier indoor environment by effectively removing airborne particles, allergens, dust, odors, and pollutants. Featuring a 3-in-1 HEPA filtration system and smart Wi-Fi control, your MIKO Air Purifier offers superior air purification with convenience and quiet operation.



Image: MIKO Air Purifier in Grey, demonstrating its smart app connectivity.

2. KEY FEATURES

- **Advanced 3-in-1 Filtration System:** Includes a Pre-Filter, H13 True HEPA Filter, and High Efficiency Activated Carbon Filter to capture 99.97% of airborne particles as small as 0.3 microns.
- **Wide Coverage Area:** Effectively purifies air in spaces up to 1200 sq ft.
- **Whisper-Quiet Operation:** Features a dedicated Sleep Mode with noise levels as low as 24dB for undisturbed rest.

- **Smart Wi-Fi App Control:** Manage settings, monitor air quality, create schedules, and check filter life remotely via the MyMiko App.
- **Multiple Modes:** Auto Mode, Sleep Mode, and adjustable fan speeds (Low, Medium, High).

Breathe Easy, Backed by the Best

IBUKI+ uses 360-degree suction to capture dirty air from all around the room, replacing it with clean and fresh air

AS SEEN ON



Forbes



Image: The MIKO Air Purifier is designed to cover large areas, up to 1200 square feet, ensuring clean air throughout your space.

3. SETUP GUIDE

1. **Unpack the Purifier:** Carefully remove the air purifier and all packaging materials from the box.
2. **Remove Filter Packaging:** Turn the unit upside down. Twist the base counter-clockwise to unlock and remove it. Take out the 3-in-1 filter and remove any plastic packaging.
3. **Install Filter:** Place the unwrapped filter back into the unit, ensuring it is seated correctly. Reattach the base by twisting it clockwise until it locks securely.
4. **Placement:** Place the air purifier on a flat, stable surface, ensuring at least 6 inches of clearance from walls or furniture for optimal airflow.
5. **Power On:** Plug the power cord into a standard electrical outlet. The unit is now ready for operation.

4. OPERATING INSTRUCTIONS

Quiet Operation

Create a comfortable and restful sleep environment with noise levels as low as **24dB**. With its whisper-quiet operation, you won't even notice it running!



24dB



Night Light



Sleep Mode



Image: The top control panel of the MIKO Air Purifier, featuring touch-sensitive buttons for various functions.

- **Power Button:** Press to turn the unit On or Off.
- **Fan Speed Button:** Cycle through Low, Medium, and High fan speeds.
- **Mode Button:** Switch between different operating modes, including Auto Mode and Sleep Mode.
- **Timer Button:** Set a timer for automatic shutdown (e.g., 2H, 4H, 8H).
- **Child Lock:** Press and hold the Child Lock button to activate/deactivate.
- **Filter Reset:** After replacing the filter, press and hold the Filter Reset button until the indicator light turns off.

Smart Wi-Fi App Control

The MyMiko App allows for convenient remote control and monitoring of your air purifier.

1. **Download the App:** Search for "MyMiko" in your smartphone's app store (available on Google Play and Apple App Store).
2. **Connect to Wi-Fi:** Follow the in-app instructions to connect your air purifier to your home Wi-Fi network.
3. **App Features:**

- Real-time air quality updates.
- Create custom operating schedules.
- Adjust fan speed and modes.
- Monitor filter life and receive replacement notifications.

360° Air Intake

Say goodbye to pollutants from every angle as Ibuki+ draws in contaminated air from all sides, maximizing purification efficiency

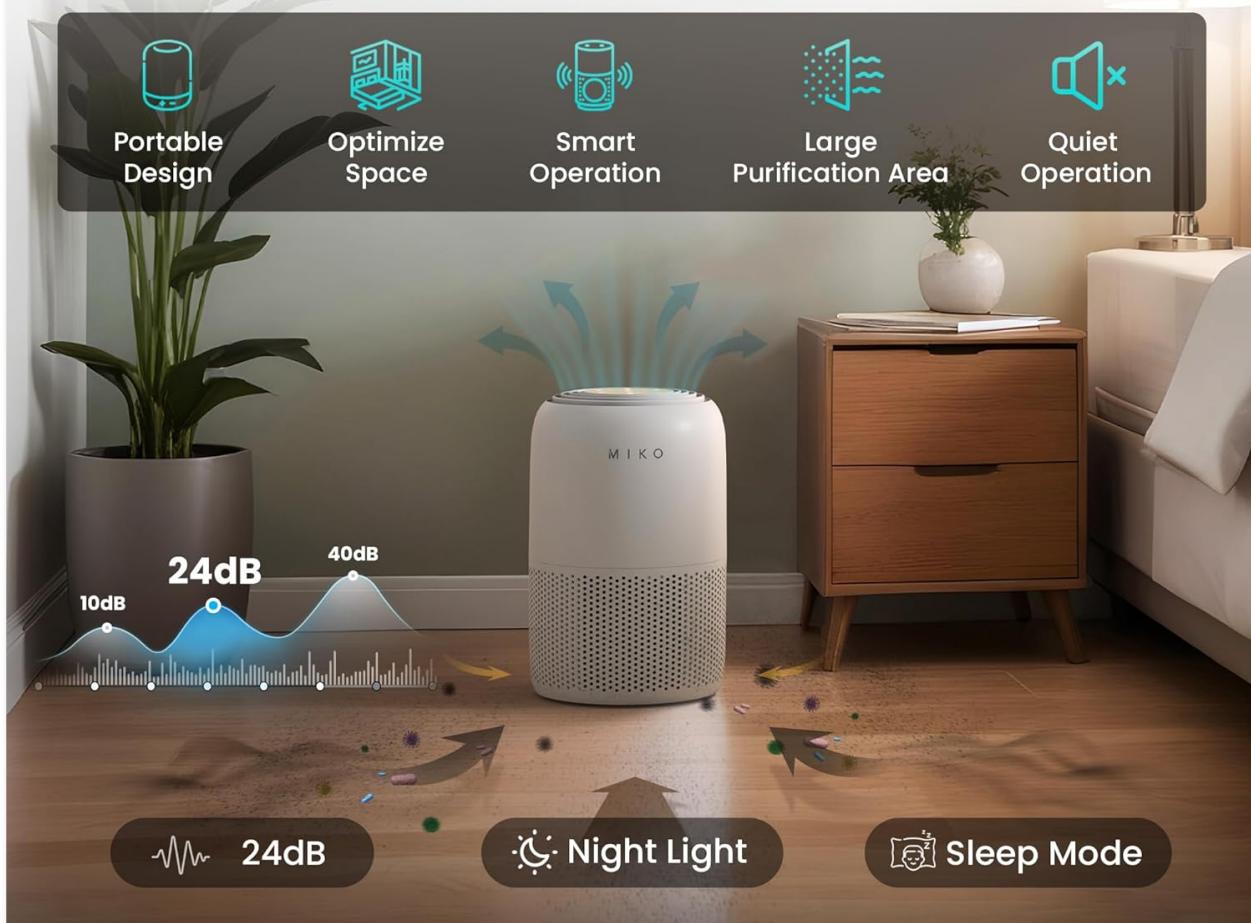


Image: The MyMiko app provides comprehensive control over your air purifier, including real-time air quality data and scheduling.

5. MAINTENANCE

Filter Replacement

The 3-in-1 filter typically lasts about 6 months, depending on usage and air quality. The filter indicator light on the control panel will illuminate when a replacement is needed.

1. **Turn Off and Unplug:** Ensure the air purifier is turned off and unplugged from the power outlet.
2. **Remove Base:** Turn the unit upside down and twist the base counter-clockwise to unlock and remove it.
3. **Remove Old Filter:** Carefully pull out the old filter. Dispose of it properly.
4. **Install New Filter:** Unwrap the new MIKO 3-in-1 filter (search B07YF5S4YK on Amazon) and insert it into the unit, ensuring it fits snugly.

5. **Reattach Base:** Place the base back onto the unit and twist clockwise to lock it securely.
6. **Reset Filter Indicator:** Plug in the unit and press and hold the Filter Reset button on the control panel until the indicator light turns off.

Four-stage filtration

Pre-filter, H14 HEPA Filter, Active Carbon Filter eliminate allergens, dust, pollen, and various impurities, effectively eradicating **99.97%** of contaminants from all spaces



Image: Detailed view of the MIKO Air Purifier's multi-stage filtration system, including the pre-filter, HEPA filter, and activated carbon filter.

Cleaning the Unit

Wipe the exterior of the air purifier with a soft, dry cloth. Do not use abrasive cleaners or solvents. The pre-filter can be gently vacuumed to remove larger dust particles between replacements, but the HEPA and activated carbon filters are not washable and must be replaced.

6. TROUBLESHOOTING

- **Unit not turning on:**
 - Ensure the power cord is securely plugged into a working outlet.
 - Check if the filter base is properly locked into place. The unit will not operate if the base is loose.

- **Poor air purification performance:**

- Check the filter indicator light. If illuminated, replace the filter.
- Ensure there is adequate clearance around the unit for proper airflow.
- Verify the fan speed setting is appropriate for the room size.

- **App connectivity issues:**

- Ensure your Wi-Fi network is stable and the purifier is within range.
- Restart the MyMiko app and the air purifier.
- Refer to the app's help section for detailed troubleshooting steps.

7. SPECIFICATIONS

Specification	Detail
Model Number	MA-04GB
Product Dimensions	8"D x 8"W x 12"H
Weight	5 Pounds
Filter Type	3-in-1 (Pre-Filter, H13 True HEPA, Activated Carbon)
Coverage Area	Up to 1200 Square Feet
Noise Level (Sleep Mode)	As low as 24dB
Connectivity	Wi-Fi App Control
Certifications	CARB Certified

8. WARRANTY AND SUPPORT

MIKO is committed to providing superior quality products and exceptional customer support. For specific warranty details and to register your product, please refer to the information provided at the time of purchase or visit the official MIKO website. Our dedicated customer support team is available to assist you with any questions or concerns regarding your air purifier.

For replacement filters, please search for ASIN **B07YF5S4YK** on Amazon.