

[Manuals.plus](#) /

› [Barrina](#) /

› Barrina 5568 Remote Series LED Linear Light 2nd-Generation Instruction Manual

## Barrina 5568

# Barrina 5568 Remote Series LED Linear Light 2nd-Generation Instruction Manual

Model: 5568 | Brand: Barrina

## 1. PRODUCT OVERVIEW

The Barrina 5568 Remote Series LED Linear Light is a 2nd-Generation lighting fixture designed for various indoor applications. It features 45W power consumption, 4500 lumens brightness, 3000K-6000K color changing capabilities, and dimmable functionality controlled via a remote. This manual provides detailed instructions for safe and efficient use.

**2nd** ↑  
**Generation**



## 5568 LED LINEAR LIGHT

**SERIES** ×  
**REMOTE  
CONTROL**

**45W**

☀️ Lumens  
4500LM


**3CCT**

📶 Beam angle  
120°


Image 1.1: Barrina 5568 LED Linear Light installed in an office environment.

## 2. PACKAGE CONTENTS

Please verify that all components are present before proceeding with installation.

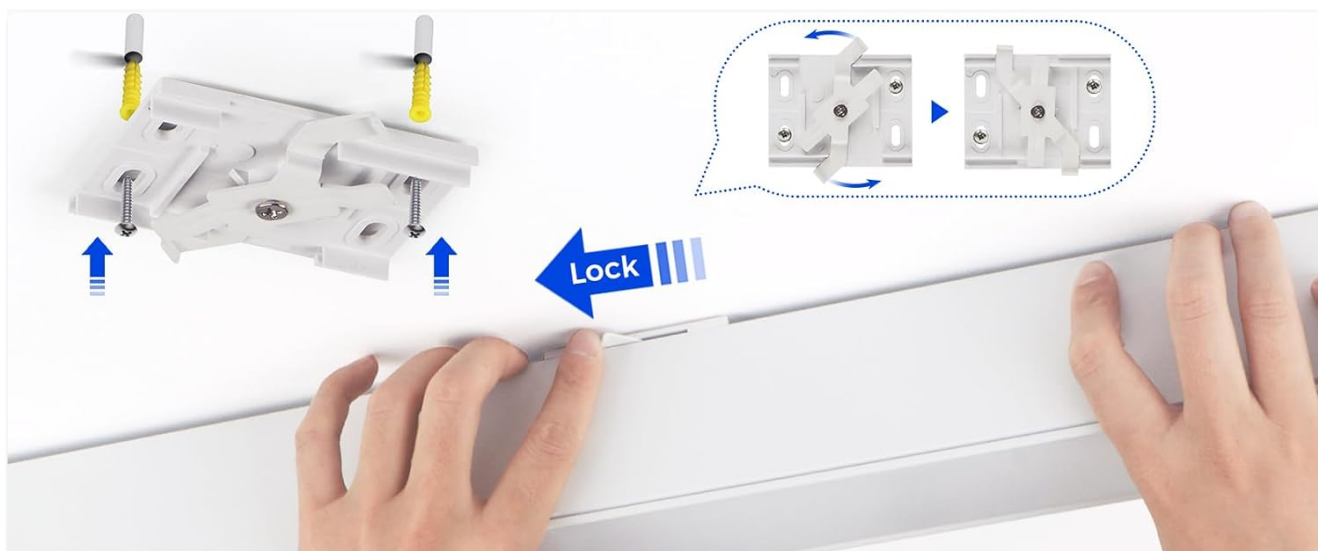

## ✕ Ceiling Mounting Guide

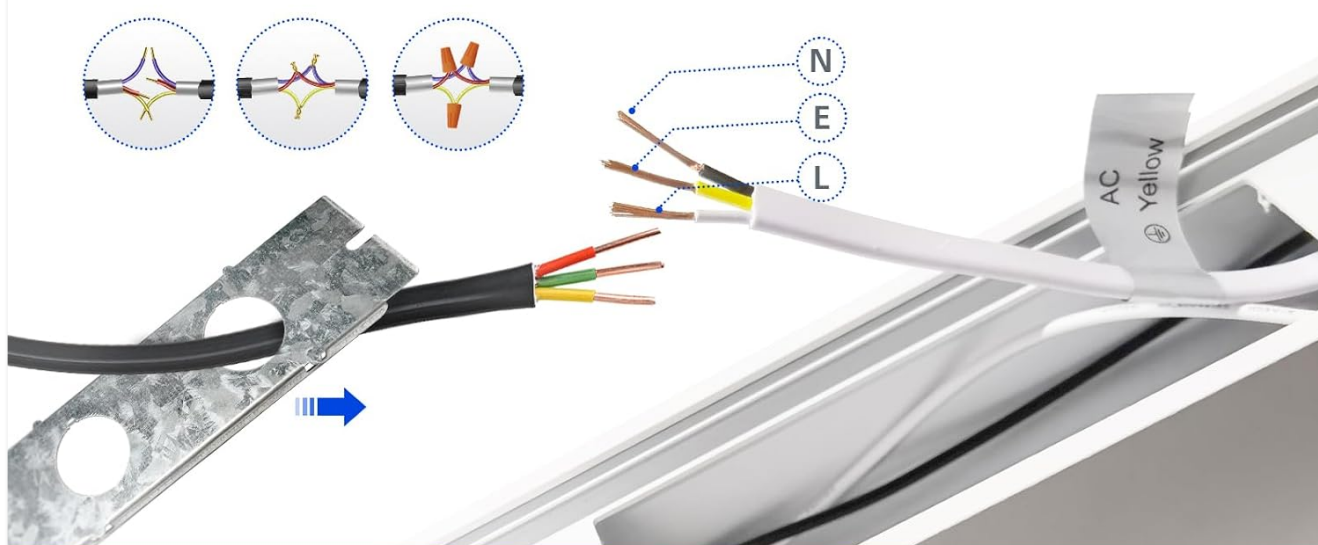

## ✕ Safer Wiring Design



Image 2.1: Included components: Remote Control (x1), Common mounting clips (x4), Suspended mounting hardware (x4), Ceiling-mounted hardware (x4).

- LED Linear Light Fixture (4 Packs)
- Remote Control
- Mounting clips
- Suspension Mounting Hardware
- Ceiling Mounting Hardware
- Instruction Manual (this document)

## 3. SETUP AND INSTALLATION

The Barrina 5568 Remote Series LED Linear Light offers two primary mounting options: suspended and ceiling installation. Ensure compatibility with 2nd-Generation 5568 Remote Series office lighting only. These lights are not compatible with Old Generation 5568 Remote Light Series, 5568-0-10V Series, or other 5568/5566 Series linear lights.

### 3.1. Mounting Options



Image 3.1: Visual representation of suspended and ceiling installation methods.

### 3.2. Seamless Connection

The patented design allows for seamless connection of multiple suspended lights. Up to 10 lights can be connected together for even, uniform lighting.

# SEAMLESS CONNECTION



Compatible only with the same 5568 Remote Series Linear Lights



ULTRA-HIGH FIT



Image 3.2: Steps for seamless connection: 1. Remove end cap, 2. Link light without wire, 3. Connect up to 10 lights.

### 3.3. Installation Guides (Video)

For detailed visual instructions, please refer to the following videos:

- **Hanging Installation**

Your browser does not support the video tag.

Video 3.3.1: Demonstrates the process of hanging installation for the 5568 Remote Series 2nd-Generation Linear Light.

- **Ceiling Installation**

Your browser does not support the video tag.

Video 3.3.2: Demonstrates the process of ceiling installation for the 5568 Remote Series 2nd-Generation Linear Light.

## 4. OPERATING INSTRUCTIONS

The Barrina 5568 LED Linear Light is controlled by a multifunctional remote. It allows for color temperature adjustment, dimming, night mode, and grouping of lights.

## 4.1. Remote Control Functions



Image 4.1: Remote control layout showing buttons for Memory function, Soft light, Color change, ON/OFF, Dimmer, and Series A/B/C grouping.

- **ON/OFF:** Turns the lights on or off.
- **Color Temperature Adjustment (3000K-6000K):** Adjusts the light color from warm white to cool white.
- **Brightness Control (0%-100%):** Dims or brightens the light output.
- **Night Mode:** Activates a low-brightness setting.
- **Memory Function:** Saves your last settings (color temperature and brightness) after a 5-second long press and automatically restores them upon next power-on.
- **Grouping (A, B, C):** Allows you to create up to 3 different lighting groups for customized control.

**Note:** These 2nd Generation 5568 Remote Series Linear Lamps do not come with or support external dimmers. All adjustments are made via the equipped remote control.

**Tips:** The same light can only be set to one group (A/B/C) on a single remote control. Only lights within the same group can simultaneously control the color temperature.

## 4.2. Remote Operation Guides (Video)

For detailed visual instructions on remote control usage and grouping:

- **Remote Control Operation Overview**

Your browser does not support the video tag.

Video 4.2.1: Explains how to set lights to the remote, control all lights simultaneously, and control individual series.

- **Detailed Remote Operation**

Your browser does not support the video tag.

Video 4.2.2: Provides a comprehensive guide to the remote control's functions, including grouping operations.

- **Memory Function Demonstration**

Your browser does not support the video tag.

Video 4.2.3: Illustrates how to use the memory function to save and recall light settings.

## 5. MAINTENANCE

To ensure optimal performance and longevity of your Barrina 5568 LED Linear Light, follow these general maintenance guidelines:

- **Cleaning:** Gently wipe the fixture with a soft, dry cloth. Avoid abrasive cleaners or solvents that may damage the finish or electrical components.
- **Inspection:** Periodically check for any loose connections or visible damage to the fixture or wiring. If any issues are found, consult a qualified electrician.
- **Bulb Replacement:** This LED fixture uses integrated LEDs and does not require bulb replacement.

## 6. TROUBLESHOOTING

If you encounter issues with your Barrina 5568 LED Linear Light, refer to the following common troubleshooting steps:

- **Light not turning on:** Ensure the power source is active and all wiring connections are secure. Check if the remote control batteries need replacement.
- **Remote not responding:** Verify battery charge. Ensure there are no obstructions between the remote and the light fixture. Re-pair the remote if necessary (refer to the 'Clear Connection' video for guidance on re-pairing).
- **Inconsistent light behavior:** Ensure lights are correctly grouped as per the remote control instructions. If lights are connected in series, ensure only one fixture is powered directly to avoid short circuits.

### 6.1. Clear Connection (Video)

If you need to reset or re-pair your remote control with the lights, follow the steps in this video:

Your browser does not support the video tag.

Video 6.1.1: Demonstrates how to clear the connection between the remote and the lights, useful for troubleshooting pairing issues.

## 7. SPECIFICATIONS

| Feature | Detail  |
|---------|---------|
| Brand   | Barrina |

| Feature                   | Detail                   |
|---------------------------|--------------------------|
| Model Number              | 5568                     |
| Color                     | 5568 Series-White        |
| Material                  | Aluminum, Polycarbonate  |
| Style                     | Modern                   |
| Light Fixture Form        | Pendant                  |
| Power Source              | AC                       |
| Wattage                   | 45 watts                 |
| Brightness                | 4500 lumen               |
| Efficiency                | 100 lumens per watt      |
| Color Temperature         | 3000K-6000K (Adjustable) |
| Control Method            | Remote                   |
| Mounting Type             | Hanging / Ceiling Mount  |
| Item Dimensions L x W x H | 49.6"L x 6.7"W x 6.5"H   |
| Indoor Outdoor Usage      | Indoor                   |
| Water Resistance Level    | Not Water Resistant      |

## 8. WARRANTY AND SUPPORT

This Barrina product comes with a **3-year warranty** from the manufacturer.

For further assistance, technical support, or warranty claims, please contact Barrina customer service through their official website or the retailer where the product was purchased.

