Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Geeni GN-WP005-199

Geeni Pet Treat Dispenser with Camera

Model: GN-WP005-199

Your Ultimate Solution for Pet Feeding and Monitoring

1. Product Overview

The Geeni Pet Treat Dispenser with Camera is an advanced smart device designed to help you monitor and interact with your pets remotely. It features a 2K HD camera, two-way audio, night vision, and an integrated treat dispenser, all controllable via the Geeni app on your smartphone.



Image: The Geeni Pet Treat Dispenser, demonstrating its treat dispensing function and the live view on a mobile application.

Key Features

- **2K HD Camera:** Provides crystal-clear visuals with a wide 125-degree field of view.
- **Effortless Treat Dispensing:** Integrated 0.5-liter treat dispenser with feeding chute and treat port.
- **Interactive Two-Way Audio:** Engage with your pets remotely through live conversation and personalized audio messages.
- **Advanced Video Monitoring:** Features automatic night vision with a 30-foot range and a smooth 25 frames per second display.
- **Seamless Wi-Fi Integration:** Compatible with 2.4GHz Wi-Fi bands for easy setup and operation.
- **Voice Control:** Compatible with Alexa and Google Assistant for convenient voice commands.
- **Motion Detection:** Receive notifications when motion is detected.
- **Auto-Follow:** The camera automatically tracks and follows pet movement within its 355-degree rotation range.



Image: Visual representation of the key features of the device, such as 2K HD video, two-way audio, app control, and night vision.

Device Components



Image: Detailed diagram illustrating the various parts of the pet treat dispenser, including the camera lens, microphone, treat port, and power input.

- **Lens:** The 2K HD camera lens for live video and recording.
- **Microphone:** For two-way audio communication.
- **Indicator Light:** Shows device status.
- **Feeding & Reset Button:** Press to manually dispense treats; hold for 6 seconds to reset the device.
- **Treat Port:** Where treats are dispensed.
- **Speaker:** For two-way audio and custom messages.
- **Cleaning Port:** For maintenance and clearing blockages.
- **Power Input:** DC 5V 2A.
- **microSD Slot:** For local video storage (microSD card not included).
- **Suction Base:** Strong suction cups on the bottom to keep the device stable.

2. Setup Guide

2.1 App Download and Account Creation

1. Download the **Geeni app** from the Apple App Store (for iOS devices) or Google Play Store (for Android devices).
2. Open the Geeni app and follow the on-screen instructions to create a new account or log in to an existing one.

2.2 Powering On and Wi-Fi Connection

1. Place the Geeni Pet Treat Dispenser in a suitable location, ensuring it is within range of your Wi-Fi router.
2. Connect the power adapter to the device's power input port and plug it into a wall outlet. The indicator light will illuminate.
3. Open the Geeni app and tap the "+" icon to add a new device.
4. Select the "Pet Treat Dispenser" or similar option from the device list.
5. Follow the in-app instructions to connect the device to your **2.4GHz Wi-Fi network**. Ensure your phone is also connected to the same 2.4GHz network during setup.
6. Once connected, the indicator light will change, and the device will be ready for use.

3. Operating Instructions

3.1 Filling the Treat Dispenser

- Remove the top lid of the dispenser.
- Fill the treat reservoir with dry pet treats. The capacity is approximately 0.5 liters.
- Ensure treats are of an appropriate size to prevent blockages in the feeding chute.
- Securely replace the lid.

3.2 Dispensing Treats

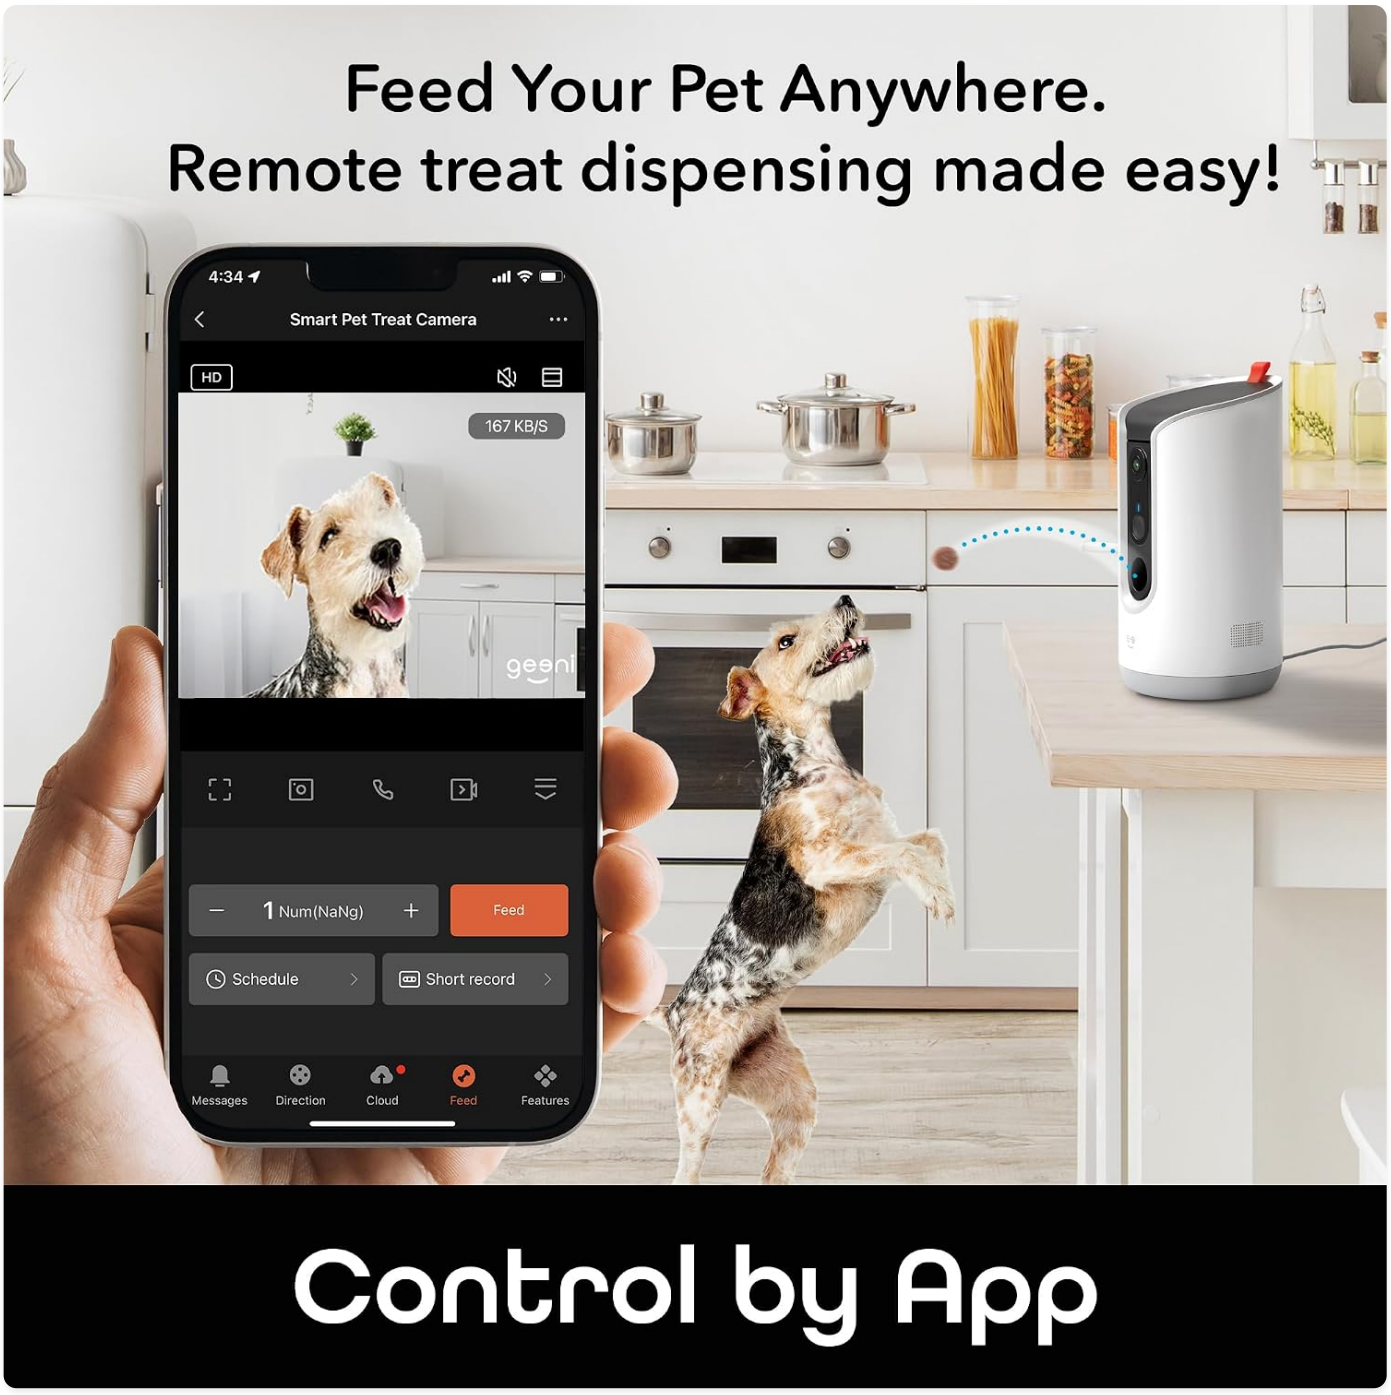


Image: The Geeni app interface showing the 'Feed' button for remote treat dispensing.

- **Manual Dispensing:** Open the Geeni app, navigate to your device, and tap the "Feed" button to dispense treats instantly. You can also press the physical Feeding & Reset Button on the device.
- **Scheduled Dispensing:** Within the Geeni app, access the scheduling feature to set specific times and quantities for automatic treat dispensing. This allows for consistent feeding routines.



Image: Setting up feeding schedules through the Geeni app for automated treat dispensing.

3.3 Live View and Monitoring

- Open the Geeni app and select your Pet Treat Dispenser to view the live 2K HD video feed.
- **Night Vision:** The device automatically switches to night vision in low-light conditions, providing clear visibility up to 30 feet.
- **Auto-Follow:** The camera can automatically track and follow your pet's movement within its 355-degree horizontal rotation range. Enable this feature in the app settings.

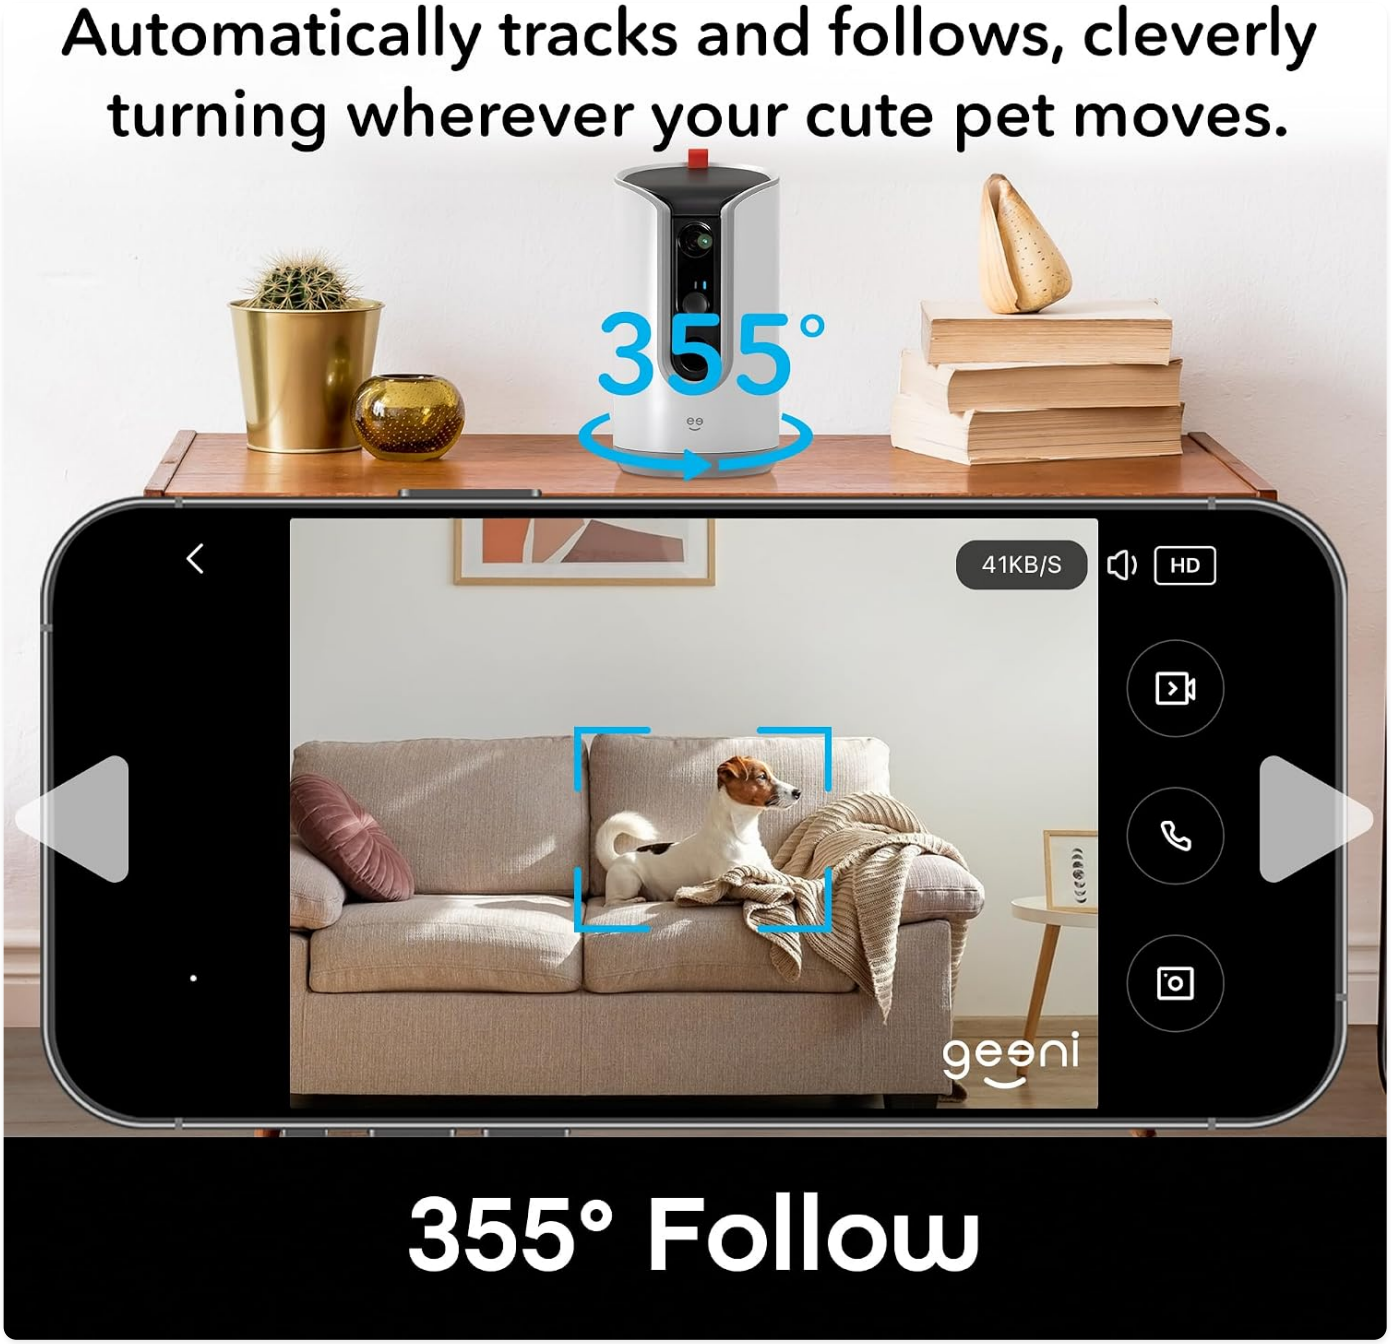


Image: The 355-degree auto-follow feature in action, tracking pet movement.

3.4 Two-Way Audio



Image: Demonstrating the two-way audio feature, allowing remote communication with your pet.

- While in live view, tap the microphone icon in the Geeni app to speak to your pet.
- You can also listen to your pet through the device's microphone.
- Record and play personalized audio messages for your pet.

3.5 Voice Control Integration



Image: The device's compatibility with Alexa and Google Home for voice control.

- The Geeni Pet Treat Dispenser is compatible with Amazon Alexa and Google Assistant.
- Link your Geeni account to your Alexa or Google Home app.
- Use voice commands such as "Alexa, show me the dog's room" to view the camera feed on compatible smart displays.

3.6 Motion Detection and Notifications



Image: The Geeni app showing a motion detection alert and live camera feed.

- Enable motion detection in the Geeni app settings.
- Receive instant notifications on your smartphone when motion is detected by the camera, keeping you informed of your pet's activity.

4. Maintenance

4.1 Cleaning the Device

- Regularly clean the treat reservoir and feeding chute to prevent residue buildup and ensure smooth operation.
- Use the provided cleaning brush to clear the cleaning port and any potential blockages in the treat dispensing mechanism.
- Wipe the exterior of the device with a soft, damp cloth. Do not use harsh chemicals or abrasive cleaners.
- Ensure the device is unplugged before cleaning.

5. Troubleshooting

Common Issues and Solutions

Problem	Possible Cause	Solution
Device not connecting to Wi-Fi / App not recognizing device.	Incorrect Wi-Fi band (not 2.4GHz), weak signal, incorrect password, device not in pairing mode.	Ensure your router is broadcasting a 2.4GHz network. Move the device closer to the router. Double-check Wi-Fi password. Reset the device by holding the Feeding & Reset Button for 6 seconds and try pairing again.
Treats not dispensing.	Treats are too large, chute is blocked, low treat level, mechanical issue.	Check treat size and ensure they are suitable. Use the cleaning brush to clear the feeding chute and treat port. Refill the treat reservoir. If the issue persists, contact support.
Poor camera image quality / Night vision not working.	Lens is dirty, insufficient light for night vision to activate, network bandwidth issues.	Gently clean the camera lens. Ensure the room is dark enough for night vision to engage automatically. Check your internet connection speed.
Two-way audio feedback/echo.	Microphone and speaker too close, high volume settings.	Reduce the volume in the app. Ensure there is no obstruction near the microphone or speaker.
Device knocked over easily.	Suction cups not adhering, uneven surface.	Ensure the base and the surface are clean and dry. Press down firmly to engage the suction cups. Place on a smooth, flat surface.

6. Specifications

Feature	Detail
Model Name	GN-WP005-199
Camera Resolution	2K HD
Field of View	125 degrees
Night Vision Range	Up to 30 feet
Frame Rate	25 frames per second
Wi-Fi Compatibility	2.4GHz bands only
Treat Dispenser Capacity	0.5 Liters
Power Input	DC 5V 2A
Item Dimensions (LxWxH)	6 x 6.75 x 12.1 inches
Item Weight	2.61 pounds

Feature	Detail
Material	Acrylonitrile Butadiene Styrene
Manufacturer	Geeni

7. Warranty and Support

7.1 Warranty Information

The Geeni Pet Treat Dispenser with Camera comes with a**1-year limited warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use. Please retain your proof of purchase for warranty claims.

7.2 Customer Support

For technical assistance, troubleshooting, or warranty inquiries, please visit the official Geeni support website or contact their customer service. Refer to the Geeni app or product packaging for the most current support contact information.

You can also find more information and frequently asked questions on theGeeni Store on Amazon.

© 2025 Geeni. All rights reserved.
This manual is for informational purposes only. Product specifications are subject to change without notice.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0D464MV1K

More documents and user manuals: **https://manuals.plus/**